EXHIBIT 10

US010984911B2

(12) **United States Patent**
Smith et al.

(10) **Patent No.: US 10,984,911 B2**
(45) **Date of Patent: Apr. 20, 2021**

(54) **MULTIPLE WAVELENGTH SENSOR EMITTERS**

(71) Applicant: **Cercacor Laboratories, Inc.**, Irvine, CA (US)

(72) Inventors: **Robert A. Smith**, Lake Forest, CA (US); **David Dalke**, Rancho Santa Margarita, CA (US); **Ammar Al-Ali**, San Juan Capistrano, CA (US); **Mohamed K. Diab**, Ladera Ranch, CA (US); **Marcelo M. Lamego**, Cupertino, CA (US)

(73) Assignee: **Cercacor Laboratories, Inc.**, Irvine, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/028,655**

(22) Filed: **Sep. 22, 2020**

(65) **Prior Publication Data**

US 2021/0007634 A1 Jan. 14, 2021

Related U.S. Application Data

(63) Continuation of application No. 16/437,611, filed on Jun. 11, 2019, which is a continuation of application

(Continued)

(51) **Int. Cl.**
A61B 5/1455 (2006.01)
G16H 40/67 (2018.01)

(Continued)

(52) **U.S. Cl.**
CPC ***G16H 40/67*** (2018.01); ***A61B 5/0022*** (2013.01); ***A61B 5/0205*** (2013.01); ***A61B 5/0261*** (2013.01); ***A61B 5/0295*** (2013.01); ***A61B 5/02416*** (2013.01); ***A61B 5/1455*** (2013.01); ***A61B 5/1495*** (2013.01);

(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,316,395	A	4/1967	Lavin
3,316,396	A	4/1967	Lavin

(Continued)

FOREIGN PATENT DOCUMENTS

DE	3244695	C2	10/1985
EP	0 231 379		8/1987

(Continued)

OTHER PUBLICATIONS

US 8,845,543 B2, 09/2014, Diab et al. (withdrawn)

(Continued)

Primary Examiner — Eric F Winakur
Assistant Examiner — Marjan Fardanesh
(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**

A physiological sensor has light emitting sources, each activated by addressing at least one row and at least one column of an electrical grid. The light emitting sources are capable of transmitting light of multiple wavelengths and a detector is responsive to the transmitted light after attenuation by body tissue.

29 Claims, 48 Drawing Sheets

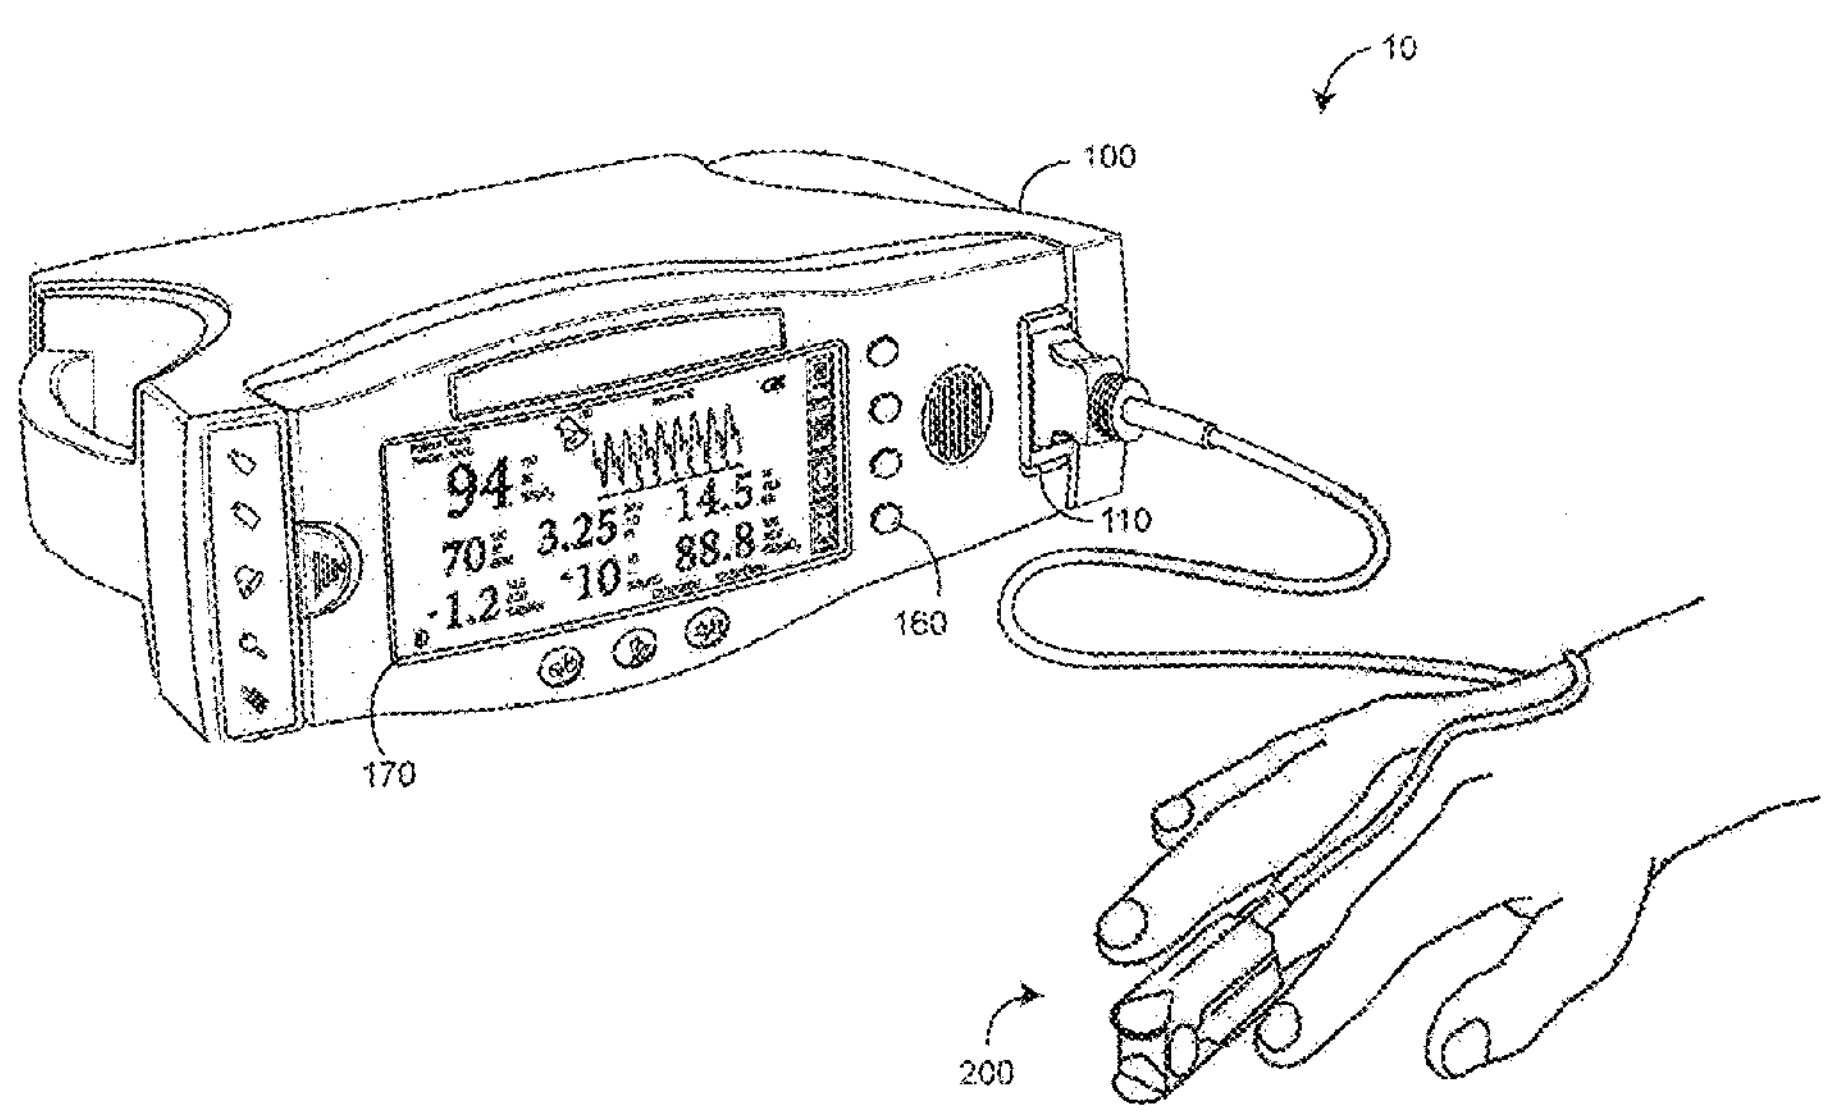

Related U.S. Application Data

No. 15/694,541, filed on Sep. 1, 2017, now Pat. No. 10,327,683, which is a continuation of application No. 14/472,760, filed on Aug. 29, 2014, now Pat. No. 9,750,443, which is a continuation of application No. 13/776,085, filed on Feb. 25, 2013, now Pat. No. 8,849,365, which is a continuation of application No. 12/422,915, filed on Apr. 13, 2009, now Pat. No. 8,385,996, which is a continuation of application No. 11/367,013, filed on Mar. 1, 2006, now Pat. No. 7,764,982.

(60) Provisional application No. 60/657,281, filed on Mar. 1, 2005, provisional application No. 60/657,268, filed on Mar. 1, 2005, provisional application No. 60/657,759, filed on Mar. 1, 2005, provisional application No. 60/657,596, filed on Mar. 1, 2005.

(51) **Int. Cl.**

G16H 10/40	(2018.01)
A61B 5/0205	(2006.01)
A61B 5/145	(2006.01)
A61B 5/00	(2006.01)
A61B 5/026	(2006.01)
A61B 5/0295	(2006.01)
A61B 5/024	(2006.01)
A61B 5/1495	(2006.01)
A61B 1/00	(2006.01)

(52) **U.S. Cl.**

CPC ***A61B 5/14532*** (2013.01); ***A61B 5/14546*** (2013.01); ***A61B 5/14551*** (2013.01); ***A61B 5/14552*** (2013.01); ***A61B 5/6815*** (2013.01); ***A61B 5/6826*** (2013.01); ***A61B 5/6829*** (2013.01); ***A61B 5/6832*** (2013.01); ***A61B 5/6838*** (2013.01); ***A61B 5/7221*** (2013.01); ***A61B 5/7246*** (2013.01); ***A61B 5/7275*** (2013.01); ***A61B 5/7278*** (2013.01); ***A61B 5/742*** (2013.01); ***A61B 5/7405*** (2013.01); ***A61B 5/746*** (2013.01); ***A61B 5/7475*** (2013.01); ***G16H 10/40*** (2018.01); ***H05K 999/99*** (2013.01); *A61B 1/00* (2013.01); *A61B 5/02427* (2013.01); *A61B 2562/08* (2013.01); *A61B 2562/085* (2013.01); *A61B 2562/222* (2013.01); *Y10S 439/909* (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,910,701	A		10/1975	Henderson et al.
3,998,550	A		12/1976	Konishi et al.
4,014,321	A		3/1977	March
4,051,522	A		9/1977	Healy et al.
4,134,678	A		1/1979	Brown et al.
4,157,708	A		6/1979	Imura
4,163,290	A		7/1979	Sutherlin et al.
4,167,331	A		9/1979	Nielsen
4,266,554	A		5/1981	Hamaguri
4,267,844	A		5/1981	Yamanishi
4,295,475	A		10/1981	Torzala
4,305,059	A		12/1981	Benton
4,331,161	A		5/1982	Patel
4,399,824	A		8/1983	Davidson
4,446,871	A		5/1984	Imura
4,491,725	A		1/1985	Pritchard
4,531,527	A		7/1985	Reinhold, Jr. et al.
4,561,440	A		12/1985	Kubo et al.
4,586,513	A		5/1986	Hamaguri
4,603,700	A		8/1986	Nichols et al.
4,621,643	A		11/1986	New et al.
4,653,498	A		3/1987	New, Jr. et al.
4,655,225	A		4/1987	Dahne et al.
4,685,464	A		8/1987	Goldberger et al.
4,694,833	A		9/1987	Hamaguri
4,695,955	A		9/1987	Faisandier
4,700,708	A		10/1987	New et al.
4,714,341	A		12/1987	Hamaguri et al.
4,770,179	A		9/1988	New et al.
4,773,422	A		9/1988	Isaacson et al.
4,781,195	A		11/1988	Martin
4,800,885	A		1/1989	Johnson
4,805,623	A		2/1989	Jobsis
4,822,997	A		4/1989	Fuller et al.
4,832,484	A		5/1989	Aoyagi et al.
4,846,183	A		7/1989	Martin
4,854,328	A		8/1989	Pollack
4,863,265	A		9/1989	Flower et al.
4,867,571	A		9/1989	Frick et al.
4,868,476	A		9/1989	Respaut
4,869,254	A		9/1989	Stone et al.
4,890,306	A		12/1989	Noda
4,907,876	A		3/1990	Suzuki et al.
4,911,167	A		3/1990	Corenman et al.
4,934,372	A		6/1990	Corenman et al.
4,938,218	A		7/1990	Goodman et al.
4,942,877	A		7/1990	Sakai et al.
4,955,379	A		9/1990	Hall
4,960,126	A		10/1990	Conlon et al.
4,960,128	A		10/1990	Gordon et al.
4,964,010	A		10/1990	Miyasaka et al.
4,964,408	A		10/1990	Hink et al.
4,967,571	A		11/1990	Sporri
4,975,581	A		12/1990	Robinson et al.
4,975,647	A		12/1990	Downer et al.
4,986,665	A		1/1991	Yamanishi et al.
4,996,975	A		3/1991	Nakamura
4,997,769	A		3/1991	Lundsgaard
5,003,979	A		4/1991	Merickel et al.
5,025,791	A		6/1991	Niwa
RE33,643	E		7/1991	Isaacson et al.
5,028,787	A		7/1991	Rosenthal et al.
5,033,472	A		7/1991	Sato et al.
5,041,187	A		8/1991	Hink et al.
5,054,495	A		10/1991	Uemura et al.
5,058,588	A		10/1991	Kaestle et al.
5,069,213	A		12/1991	Polczynski
5,077,476	A		12/1991	Rosenthal
5,078,136	A		1/1992	Stone et al.
5,101,825	A		4/1992	Gravensetin et al.
5,137,023	A		8/1992	Mendelson et al.
5,155,697	A		10/1992	Bunsen
5,162,725	A		11/1992	Hodson et al.
5,163,438	A		11/1992	Gordon et al.
5,188,108	A		2/1993	Secker
5,189,609	A		2/1993	Tivig et al.
5,190,040	A		3/1993	Aoyagi
5,203,329	A		4/1993	Takatani et al.
5,209,230	A		5/1993	Swedlow et al.
5,226,053	A		7/1993	Cho et al.
5,226,417	A		7/1993	Swedlow et al.
5,246,002	A		9/1993	Prosser
5,247,931	A		9/1993	Norwood
5,259,381	A		11/1993	Chung
5,267,562	A		12/1993	Ukawa et al.
5,267,563	A		12/1993	Swedlow et al.
5,278,627	A		1/1994	Aoyagi
5,297,548	A		3/1994	Pologe
5,313,940	A	*	5/1994	Fuse A61B 5/02416 600/310
5,319,355	A		6/1994	Russek
5,331,549	A		7/1994	Crawford, Jr.
5,335,659	A		8/1994	Pologe et al.
5,337,744	A		8/1994	Branigan
5,337,745	A		8/1994	Benaron
5,341,805	A		8/1994	Stavridi et al.
5,348,004	A		9/1994	Hollub
5,351,685	A		10/1994	Potratz
5,355,129	A		10/1994	Baumann

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,355,880 A * 10/1994 Thomas A61B 5/02007 128/925
5,355,882 A 10/1994 Ukawa et al.
5,361,758 A 11/1994 Hall et al.
5,368,041 A 11/1994 Shambroom
5,368,224 A 11/1994 Richardson et al.
D353,195 S 12/1994 Savage et al.
D353,196 S 12/1994 Savage et al.
5,370,114 A 12/1994 Wong et al.
5,372,136 A 12/1994 Steuer et al.
5,377,676 A 1/1995 Vari et al.
5,383,874 A 1/1995 Jackson et al.
5,385,143 A 1/1995 Aoyagi
5,387,122 A 2/1995 Goldberger et al.
5,392,777 A 2/1995 Swedlow et al.
5,400,267 A 3/1995 Denen et al.
5,413,101 A 5/1995 Sugiura
D359,546 S 6/1995 Savage et al.
5,421,329 A 6/1995 Casciani et al.
5,424,545 A 6/1995 Block et al.
5,425,362 A 6/1995 Siker et al.
5,425,375 A 6/1995 Chin et al.
5,427,093 A 6/1995 Ogawa et al.
5,429,128 A 7/1995 Cadell et al.
5,431,170 A 7/1995 Mathews
5,435,309 A 7/1995 Thomas et al.
5,436,499 A 7/1995 Namavar et al.
D361,840 S 8/1995 Savage et al.
D362,063 S 9/1995 Savage et al.
5,452,717 A 9/1995 Branigan et al.
D363,120 S 10/1995 Savage et al.
5,456,252 A 10/1995 Vari et al.
5,469,845 A 11/1995 DeLonzor et al.
RE35,122 E 12/1995 Corenman et al.
5,479,934 A 1/1996 Imran
5,482,036 A 1/1996 Diab et al.
5,487,386 A 1/1996 Wakabayashi et al.
5,490,505 A 2/1996 Diab et al.
5,490,523 A 2/1996 Isaacson et al.
5,494,032 A 2/1996 Robinson et al.
5,494,043 A 2/1996 O'Sullivan et al.
5,503,148 A 4/1996 Pologe et al.
5,520,177 A 5/1996 Ogawa
5,528,519 A 6/1996 Ohkura et al.
5,533,507 A 7/1996 Potratz
5,533,511 A 7/1996 Kaspari et al.
5,534,851 A 7/1996 Russek
5,551,423 A 9/1996 Sugiura
5,553,615 A 9/1996 Carim et al.
5,555,882 A 9/1996 Richardson et al.
5,561,275 A 10/1996 Savage et al.
5,562,002 A 10/1996 Lalin
5,575,284 A 11/1996 Athan et al.
5,577,500 A 11/1996 Potratz
5,584,299 A 12/1996 Sakai et al.
5,588,427 A 12/1996 Tien
5,590,649 A 1/1997 Caro et al.
5,590,652 A 1/1997 Inai
5,595,176 A 1/1997 Yamaura
5,596,992 A 1/1997 Haaland et al.
5,602,924 A 2/1997 Durand et al.
5,603,323 A 2/1997 Pflugrath et al.
5,603,623 A 2/1997 Nishikawa et al.
5,615,672 A 4/1997 Braig et al.
5,617,857 A 4/1997 Chader et al.
5,630,413 A 5/1997 Thomas et al.
5,632,272 A 5/1997 Diab et al.
5,638,816 A 6/1997 Kiani-Azarbayjany et al.
5,638,818 A 6/1997 Diab et al.
5,645,059 A 7/1997 Fein et al.
5,645,060 A 7/1997 Yorkey
5,645,440 A 7/1997 Tobler et al.
5,651,780 A 7/1997 Jackson et al.
5,658,248 A 8/1997 Klein et al.
5,660,567 A 8/1997 Nierlich et al.
5,662,106 A 9/1997 Swedlow et al.
5,671,914 A 9/1997 Kalkhoran et al.
5,676,139 A 10/1997 Goldberger et al.
5,676,141 A 10/1997 Hollub
5,678,544 A 10/1997 Delonzor et al.
5,685,299 A 11/1997 Diab et al.
5,685,301 A 11/1997 Klomhaus
5,687,719 A 11/1997 Sato et al.
5,687,722 A 11/1997 Tien et al.
5,690,104 A 11/1997 Kanemoto et al.
5,692,503 A 12/1997 Kuenstner
5,697,371 A 12/1997 Aoyagi
5,713,355 A 2/1998 Richardson et al.
5,719,589 A 2/1998 Norman et al.
5,720,284 A 2/1998 Aoyagi et al.
5,720,293 A 2/1998 Quinn et al.
5,726,440 A 3/1998 Kalkhoran et al.
5,730,125 A 3/1998 Prutchi et al.
D393,830 S 4/1998 Tobler et al.
5,742,718 A 4/1998 Harman et al.
5,743,262 A 4/1998 Lepper, Jr. et al.
5,743,263 A 4/1998 Baker, Jr.
5,746,206 A 5/1998 Mannheimer
5,746,697 A 5/1998 Swedlow et al.
5,747,806 A 5/1998 Khalil et al.
5,750,994 A 5/1998 Schlager
5,752,914 A 5/1998 Delonzor et al.
5,755,226 A 5/1998 Carim et al.
5,758,644 A 6/1998 Diab et al.
5,760,910 A 6/1998 Lepper, Jr. et al.
5,769,785 A 6/1998 Diab et al.
5,772,587 A 6/1998 Gratton et al.
5,779,630 A 7/1998 Fein et al.
5,782,237 A 7/1998 Casciani et al.
5,782,756 A 7/1998 Mannheimer
5,782,757 A 7/1998 Diab et al.
5,785,659 A 7/1998 Caro et al.
5,790,729 A 8/1998 Pologe et al.
5,791,347 A 8/1998 Flaherty et al.
5,792,052 A 8/1998 Isaacson et al.
5,793,485 A 8/1998 Gourley
5,800,348 A 9/1998 Kaestle et al.
5,800,349 A 9/1998 Isaacson et al.
5,803,910 A 9/1998 Potratz
5,807,246 A 9/1998 Sakaguchi et al.
5,807,247 A 9/1998 Merchant et al.
5,810,723 A 9/1998 Aldrich
5,810,724 A 9/1998 Gronvall
5,810,734 A 9/1998 Caro et al.
5,817,010 A 10/1998 Hibl
5,818,985 A 10/1998 Merchant et al.
5,823,950 A 10/1998 Diab et al.
5,823,952 A 10/1998 Levinson et al.
5,827,182 A 10/1998 Raley et al.
5,830,121 A 11/1998 Enomoto et al.
5,830,131 A 11/1998 Caro et al.
5,830,137 A 11/1998 Sharf
5,833,602 A 11/1998 Osemwota
5,833,618 A 11/1998 Caro et al.
5,839,439 A 11/1998 Nierlich et al.
RE36,000 E 12/1998 Swedlow et al.
5,842,979 A 12/1998 Jarman
5,846,190 A 12/1998 Woehrle
5,850,443 A 12/1998 Van Oorschot et al.
5,851,178 A 12/1998 Aronow
5,851,179 A 12/1998 Ritson et al.
5,853,364 A 12/1998 Baker, Jr. et al.
5,857,462 A 1/1999 Thomas et al.
5,860,099 A 1/1999 Milios et al.
5,860,919 A 1/1999 Kiani-Azarbayjany et al.
5,865,736 A 2/1999 Baker, Jr. et al.
5,876,348 A 3/1999 Sugo
5,885,213 A 3/1999 Richardson et al.
5,890,929 A 4/1999 Mills et al.
5,891,022 A 4/1999 Pologe
5,891,024 A 4/1999 Jarman et al.
5,900,632 A 5/1999 Sterling et al.
5,904,654 A 5/1999 Wohltmann et al.
5,910,108 A 6/1999 Solenberger

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,916,154 A 6/1999 Hobbs et al.
5,919,133 A 7/1999 Taylor
5,919,134 A 7/1999 Diab
5,921,921 A 7/1999 Potratz et al.
5,924,979 A 7/1999 Swedlow
5,934,277 A 8/1999 Mortz
5,934,925 A 8/1999 Tobler et al.
5,939,609 A 8/1999 Knapp et al.
5,940,182 A 8/1999 Lepper, Jr. et al.
5,954,644 A 9/1999 Dettling
5,976,466 A 11/1999 Ratner et al.
5,978,691 A 11/1999 Mills
5,983,122 A 11/1999 Jarman et al.
5,987,343 A 11/1999 Kinast
5,991,355 A 11/1999 Dahlke
5,995,855 A 11/1999 Kiani et al.
5,995,856 A 11/1999 Mannheimer et al.
5,995,859 A 11/1999 Takahashi
5,997,343 A 12/1999 Mills et al.
5,999,841 A 12/1999 Aoyagi et al.
6,002,952 A 12/1999 Diab et al.
6,006,119 A 12/1999 Soller et al.
6,010,937 A 1/2000 Karam et al.
6,011,986 A 1/2000 Diab et al.
6,014,576 A 1/2000 Raley
6,018,673 A 1/2000 Chin et al.
6,018,674 A 1/2000 Aronow
6,023,541 A 2/2000 Merchant et al.
6,027,452 A 2/2000 Flaherty et al.
6,035,223 A 3/2000 Baker, Jr.
6,036,642 A 3/2000 Diab et al.
6,040,578 A 3/2000 Malin et al.
6,045,509 A 4/2000 Caro et al.
6,064,898 A 5/2000 Aldrich
6,066,204 A 5/2000 Haven
6,067,462 A 5/2000 Diab et al.
6,068,594 A 5/2000 Schloemer et al.
6,073,037 A 6/2000 Alam et al.
6,081,735 A 6/2000 Diab et al.
6,083,172 A 7/2000 Baker, Jr. et al.
6,088,607 A 7/2000 Diab et al.
6,094,592 A 7/2000 Yorkey et al.
6,104,938 A 8/2000 Huiku
6,110,522 A 8/2000 Lepper, Jr. et al.
6,112,107 A 8/2000 Hannula
6,115,673 A 9/2000 Malin et al.
6,122,042 A 9/2000 Wunderman et al.
6,124,597 A 9/2000 Shehada et al.
6,128,521 A 10/2000 Marro et al.
6,129,675 A 10/2000 Jay
6,132,363 A 10/2000 Freed et al.
6,144,868 A 11/2000 Parker
6,149,588 A 11/2000 Noda et al.
6,151,516 A 11/2000 Kiani-Azarbayjany et al.
6,151,518 A 11/2000 Hayashi
6,152,754 A 11/2000 Gerhardt et al.
6,154,667 A 11/2000 Miura et al.
6,157,041 A 12/2000 Thomas et al.
6,157,850 A 12/2000 Diab et al.
6,163,715 A 12/2000 Larsen et al.
6,165,005 A 12/2000 Mills et al.
6,165,173 A 12/2000 Kamdar et al.
6,174,283 B1 1/2001 Nevo et al.
6,175,752 B1 1/2001 Say et al.
6,184,521 B1 2/2001 Coffin, IV et al.
6,192,261 B1 2/2001 Gratton et al.
6,206,830 B1 3/2001 Diab et al.
6,226,539 B1 5/2001 Potratz
6,229,856 B1 5/2001 Diab et al.
6,230,035 B1 5/2001 Aoyagi et al.
6,232,609 B1 5/2001 Snyder et al.
6,236,872 B1 5/2001 Diab et al.
6,237,604 B1 5/2001 Burnside et al.
6,241,683 B1 6/2001 Macklem et al.
6,248,083 B1 6/2001 Smith et al.
6,253,097 B1 6/2001 Aronow et al.
6,255,708 B1 7/2001 Sudharsanan et al.
6,256,523 B1 7/2001 Diab et al.
6,262,698 B1 7/2001 Blum
6,263,222 B1 7/2001 Diab et al.
6,266,551 B1 7/2001 Osadchy et al.
6,272,363 B1 8/2001 Casciani et al.
6,278,522 B1 8/2001 Lepper, Jr. et al.
6,280,213 B1 8/2001 Tobler et al.
6,280,381 B1 8/2001 Malin et al.
6,285,895 B1 9/2001 Ristolainen et al.
6,285,896 B1 9/2001 Tobler et al.
6,295,330 B1 9/2001 Skog et al.
6,298,252 B1 10/2001 Kovach et al.
6,298,255 B1 10/2001 Cordero et al.
6,301,493 B1 10/2001 Marro et al.
6,304,675 B1 10/2001 Osbourn et al.
6,304,767 B1 10/2001 Soller et al.
6,308,089 B1 10/2001 von der Ruhr
6,317,627 B1 11/2001 Ennen et al.
6,321,100 B1 11/2001 Parker
6,325,761 B1 12/2001 Jay
6,330,468 B1 12/2001 Scharf
6,334,065 B1 12/2001 Al-Ali et al.
6,336,900 B1 1/2002 Alleckson et al.
6,339,715 B1 1/2002 Bahr et al.
6,341,257 B1 1/2002 Haaland
6,343,224 B1 1/2002 Parker
6,356,774 B1 1/2002 Bernstein et al.
6,349,228 B1 2/2002 Kiani et al.
6,351,658 B1 2/2002 Middleman et al.
6,360,113 B1 3/2002 Dettling
6,360,114 B1 3/2002 Diab et al.
6,363,269 B1 3/2002 Hanna et al.
6,368,283 B1 4/2002 Xu et al.
6,371,921 B1 4/2002 Caro et al.
6,374,129 B1 4/2002 Chin et al.
6,377,828 B1 4/2002 Chaiken et al.
6,377,829 B1 4/2002 Al-Ali
6,388,240 B2 5/2002 Schulz et al.
6,393,310 B1 5/2002 Kuenstner
6,397,091 B2 5/2002 Diab et al.
6,397,092 B1 5/2002 Norris et al.
6,397,093 B1 5/2002 Aldrich
6,402,690 B1 6/2002 Rhee et al.
6,408,198 B1 6/2002 Hanna et al.
6,411,373 B1 6/2002 Garside et al.
6,411,833 B1 6/2002 Baker, Jr. et al.
6,415,166 B1 7/2002 Van Hoy et al.
6,415,167 B1 7/2002 Blank et al.
6,415,233 B1 7/2002 Haaland
6,415,236 B2 7/2002 Kobayashi et al.
6,421,549 B1 7/2002 Jacques
6,430,437 B1 8/2002 Marro
6,430,525 B1 8/2002 Weber et al.
6,434,408 B1 8/2002 Heckel
6,441,388 B1 8/2002 Thomas et al.
6,453,184 B1 9/2002 Hyogo et al.
6,455,340 B1 9/2002 Chua et al.
6,463,310 B1 10/2002 Swedlow et al.
6,463,311 B1 10/2002 Diab
6,466,824 B1 10/2002 Struble
6,470,199 B1 10/2002 Kopotic et al.
6,480,729 B2 11/2002 Stone
6,487,429 B2 11/2002 Hockersmith et al.
6,490,466 B1 12/2002 Fein et al.
6,490,684 B1 12/2002 Fenstemaker et al.
6,497,659 B1 12/2002 Rafert
6,501,974 B2 12/2002 Huiku
6,501,975 B2 12/2002 Diab et al.
6,504,943 B1 1/2003 Sweatt et al.
6,505,059 B1 1/2003 Kollias et al.
6,505,060 B1 1/2003 Norris
6,505,061 B2 1/2003 Larson
6,505,133 B1 1/2003 Hanna
6,510,329 B2 1/2003 Heckel
6,515,273 B2 2/2003 Al-Ali
6,519,486 B1 2/2003 Edgar, Jr. et al.
6,519,487 B1 2/2003 Parker

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,522,398 B2 2/2003 Cadell et al.
6,525,386 B1 2/2003 Mills et al.
6,526,300 B1 2/2003 Kiani et al.
6,526,301 B2 2/2003 Larsen et al.
6,528,809 B1 3/2003 Thomas et al.
6,534,012 B1 3/2003 Hazen et al.
6,537,225 B1 3/2003 Mills
6,541,756 B2 4/2003 Schulz et al.
6,542,763 B1 4/2003 Yamashita et al.
6,542,764 B1 4/2003 Al-Ali et al.
6,545,652 B1 4/2003 Tsuji
6,546,267 B1 4/2003 Sugiura
6,553,241 B2 4/2003 Mannheimer et al.
6,564,077 B2 5/2003 Mortara
6,571,113 B1 5/2003 Fein et al.
6,580,086 B1 * 6/2003 Schulz A61B 5/02427 250/461.2
6,582,964 B1 6/2003 Samsoondar et al.
6,584,336 B1 6/2003 Ali et al.
6,584,413 B1 6/2003 Keenan et al.
6,587,196 B1 7/2003 Stippick et al.
6,587,199 B1 7/2003 Luu
6,591,123 B2 7/2003 Fein et al.
6,594,511 B2 7/2003 Stone et al.
6,594,518 B1 7/2003 Benaron et al.
6,595,316 B2 7/2003 Cybulski et al.
6,597,932 B2 7/2003 Tian et al.
6,597,933 B2 7/2003 Kiani et al.
6,600,940 B1 7/2003 Fein et al.
6,606,509 B2 8/2003 Schmitt
6,606,510 B2 8/2003 Swedlow et al.
6,606,511 B1 8/2003 Ali et al.
6,609,016 B1 8/2003 Lynn
6,611,698 B1 8/2003 Yamashita et al.
6,614,521 B2 9/2003 Samsoondar et al.
6,615,064 B1 9/2003 Aldrich
6,615,151 B1 9/2003 Scecina et al.
6,618,602 B2 9/2003 Levin
6,622,095 B2 9/2003 Kobayashi et al.
6,628,975 B1 9/2003 Fein et al.
6,631,281 B1 10/2003 Kastle
6,632,181 B2 10/2003 Flaherty et al.
6,635,559 B2 10/2003 Greenwald et al.
6,639,668 B1 10/2003 Trepagnier
6,640,116 B2 10/2003 Diab
6,640,117 B2 10/2003 Makarewicz et al.
6,643,530 B2 11/2003 Diab et al.
6,645,142 B2 11/2003 Braig et al.
6,650,917 B2 11/2003 Diab et al.
6,654,623 B1 11/2003 Kastle
6,654,624 B2 11/2003 Diab et al.
6,657,717 B2 12/2003 Cadell et al.
6,658,276 B2 12/2003 Kianl et al.
6,658,277 B2 12/2003 Wasserman
6,661,161 B1 12/2003 Lanzo et al.
6,662,033 B2 12/2003 Casciani et al.
6,665,551 B1 12/2003 Suzuki
6,668,183 B2 12/2003 Hicks et al.
6,671,526 B1 12/2003 Aoyagi et al.
6,671,531 B2 12/2003 Al-Ali et al.
6,675,031 B1 1/2004 Porges et al.
6,675,106 B1 1/2004 Keenan et al.
6,676,600 B1 1/2004 Conero et al.
6,678,543 B2 1/2004 Diab et al.
6,681,126 B2 1/2004 Solenberger
6,684,090 B2 1/2004 Ali et al.
6,684,091 B2 1/2004 Parker
6,687,620 B1 2/2004 Haaland et al.
6,690,466 B2 2/2004 Miller et al.
6,694,157 B1 2/2004 Stone et al.
6,697,655 B2 2/2004 Sueppel et al.
6,697,656 B1 2/2004 Al-Ali
6,697,657 B1 2/2004 Shehada et al.
6,697,658 B2 2/2004 Al-Ali
RE38,476 E 3/2004 Diab et al.
6,699,194 B1 3/2004 Diab et al.
6,701,170 B2 3/2004 Stetson
6,708,049 B1 3/2004 Berson et al.
6,711,503 B2 3/2004 Haaland
6,714,803 B1 3/2004 Mortz
6,714,804 B2 3/2004 Al-Ali et al.
6,714,805 B2 3/2004 Jeon et al.
RE38,492 E 4/2004 Diab et al.
6,719,705 B2 4/2004 Mills
6,720,734 B2 4/2004 Norris
6,721,582 B2 4/2004 Trepagnier et al.
6,721,584 B2 4/2004 Baker, Jr. et al.
6,721,585 B1 4/2004 Parker
6,725,074 B1 4/2004 Kastle
6,725,075 B2 4/2004 Al-Ali
6,726,634 B2 4/2004 Freeman
6,728,560 B2 4/2004 Kollias et al.
6,735,459 B2 5/2004 Parker
6,738,652 B2 5/2004 Mattu et al.
6,741,875 B1 5/2004 Pawluczyk et al.
6,741,876 B1 5/2004 Scecina et al.
6,743,172 B1 6/2004 Blike
6,745,060 B2 6/2004 Diab et al.
6,745,061 B1 6/2004 Hicks et al.
6,748,253 B2 6/2004 Norris et al.
6,748,254 B2 6/2004 O'Neil et al.
6,754,515 B1 6/2004 Pologe
6,754,516 B2 6/2004 Mannheimer
6,760,607 B2 7/2004 Al-Ali
6,760,609 B2 7/2004 Jacques
6,770,028 B1 8/2004 Ali et al.
6,771,994 B2 8/2004 Kiani et al.
6,773,397 B2 8/2004 Kelly
6,778,923 B2 8/2004 Norris et al.
6,780,158 B2 8/2004 Yarita
6,788,849 B1 9/2004 Pawluczyk
6,788,965 B2 9/2004 Ruchti et al.
6,792,300 B1 9/2004 Diab et al.
6,800,373 B2 10/2004 Corczyca
6,801,797 B2 10/2004 Mannheimer et al.
6,801,799 B2 10/2004 Mendelson
6,810,277 B2 10/2004 Edgar, Jr. et al.
6,813,511 B2 11/2004 Diab et al.
6,816,241 B2 11/2004 Grubisic
6,816,741 B2 11/2004 Diab
6,819,950 B2 11/2004 Mills
6,822,564 B2 11/2004 Al-Ali
6,825,619 B2 11/2004 Norris
6,826,419 B2 11/2004 Diab et al.
6,829,496 B2 12/2004 Nagai et al.
6,829,501 B2 12/2004 Nielsen et al.
6,830,711 B2 12/2004 Mills et al.
6,836,679 B2 12/2004 Baker, Jr. et al.
6,839,579 B1 1/2005 Chin
6,839,580 B2 1/2005 Zonios et al.
6,839,582 B2 1/2005 Heckel
6,842,702 B2 1/2005 Haaland et al.
6,845,256 B2 1/2005 Chin et al.
6,847,835 B1 1/2005 Yamanishi
6,850,787 B2 2/2005 Weber et al.
6,850,788 B2 2/2005 Al-Ali
6,852,083 B2 2/2005 Caro et al.
6,861,639 B2 3/2005 Al-Ali
6,861,641 B1 3/2005 Adams
6,869,402 B2 3/2005 Arnold
6,876,931 B2 4/2005 Lorenz et al.
6,882,874 B2 4/2005 Huiku
6,898,452 B2 5/2005 Al-Ali et al.
6,912,049 B2 6/2005 Pawluczyk et al.
6,917,422 B2 7/2005 Samsoondar et al.
6,919,566 B1 7/2005 Cadell
6,920,345 B2 7/2005 Al-Ali et al.
6,921,367 B2 7/2005 Mills
6,922,645 B2 7/2005 Haaland et al.
6,928,311 B1 8/2005 Pawluczyk et al.
6,931,268 B1 8/2005 Kiani-Azarbayjany et al.
6,931,269 B2 8/2005 Terry
6,934,570 B2 8/2005 Kiani et al.
6,939,305 B2 9/2005 Flaherty et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,943,348	B1	9/2005	Coffin, IV
6,944,487	B2	9/2005	Maynard et al.
6,950,687	B2	9/2005	Al-Ali
6,956,572	B2	10/2005	Zaleski
6,956,649	B2	10/2005	Acosta et al.
6,961,598	B2	11/2005	Diab
6,970,792	B1	11/2005	Diab
6,975,891	B2	12/2005	Pawluczyk
6,979,812	B2	12/2005	Al-Ali
6,985,764	B2	1/2006	Mason et al.
6,987,994	B1	1/2006	Mortz
6,990,364	B2	1/2006	Ruchti et al.
6,993,371	B2	1/2006	Kiani et al.
6,996,427	B2	2/2006	Ali et al.
6,998,247	B2	2/2006	Monfre et al.
6,999,904	B2	2/2006	Weber et al.
7,001,337	B2	2/2006	Dekker
7,003,338	B2	2/2006	Weber et al.
7,003,339	B2	2/2006	Diab et al.
7,006,856	B2	2/2006	Baker, Jr. et al.
7,015,451	B2	3/2006	Dalke et al.
7,024,233	B2	4/2006	Ali et al.
7,027,849	B2	4/2006	Al-Ali
7,030,749	B2	4/2006	Al-Ali
7,039,449	B2	5/2006	Al-Ali
7,041,060	B2	5/2006	Flaherty et al.
7,044,918	B2	5/2006	Diab
7,067,893	B2	6/2006	Mills et al.
D526,719	S	8/2006	Richie, Jr. et al.
7,096,052	B2	8/2006	Mason et al.
7,096,054	B2	8/2006	Abdul-Hafiz et al.
D529,616	S	10/2006	Deros et al.
7,132,641	B2	11/2006	Schulz et al.
7,133,710	B2	11/2006	Acosta et al.
7,142,901	B2	11/2006	Kiani et al.
7,149,561	B2	12/2006	Diab
7,186,966	B2	3/2007	Al-Ali
7,190,261	B2	3/2007	Al-Ali
7,215,984	B2	5/2007	Diab et al.
7,215,986	B2	5/2007	Diab et al.
7,221,971	B2	5/2007	Diab et al.
7,225,006	B2	5/2007	Al-Ali et al.
7,225,007	B2	5/2007	Al-Ali et al.
RE39,672	E	6/2007	Shehada et al.
7,239,905	B2	7/2007	Kiani-Azarbayjany et al.
7,245,953	B1	7/2007	Parker
7,254,429	B2	8/2007	Schurman et al.
7,254,431	B2	8/2007	Al-Ali et al.
7,254,433	B2	8/2007	Diab et al.
7,254,434	B2	8/2007	Schulz et al.
7,272,425	B2	9/2007	Al-Ali
7,274,955	B2	9/2007	Kiani et al.
D554,263	S	10/2007	Al-Ali
7,280,858	B2	10/2007	Al-Ali et al.
7,289,835	B2	10/2007	Mansfield et al.
7,292,883	B2	11/2007	De Felice et al.
7,295,866	B2	11/2007	Al-Ali
7,299,080	B2	11/2007	Acosta et al.
7,328,053	B1	2/2008	Diab et al.
7,332,784	B2	2/2008	Mills et al.
7,340,287	B2	3/2008	Mason et al.
7,341,559	B2	3/2008	Schulz et al.
7,343,186	B2	3/2008	Lamego et al.
D566,282	S	4/2008	Al-Ali et al.
7,355,512	B1	4/2008	Al-Ali
7,356,365	B2	4/2008	Schurman
7,371,981	B2	5/2008	Abdul-Hafiz
7,373,193	B2	5/2008	Al-Ali et al.
7,373,194	B2	5/2008	Weber et al.
7,376,453	B1	5/2008	Diab et al.
7,377,794	B2	5/2008	Al-Ali et al.
7,377,899	B2	5/2008	Weber et al.
7,383,070	B2	6/2008	Diab et al.
7,395,158	B2	7/2008	Monfre et al.
7,415,297	B2	8/2008	Al-Ali et al.
7,428,432	B2	9/2008	Ali et al.
7,438,683	B2	10/2008	Al-Ali et al.
7,440,787	B2	10/2008	Diab
7,454,240	B2	11/2008	Diab et al.
7,457,652	B2	11/2008	Porges et al.
7,467,002	B2	12/2008	Weber et al.
7,469,157	B2	12/2008	Diab et al.
7,471,969	B2	12/2008	Diab et al.
7,471,971	B2	12/2008	Diab et al.
7,483,729	B2	1/2009	Al-Ali et al.
7,483,730	B2	1/2009	Diab et al.
7,489,958	B2	2/2009	Diab et al.
7,496,391	B2	2/2009	Diab et al.
7,496,393	B2	2/2009	Diab et al.
D587,657	S	3/2009	Al-Ali et al.
7,499,741	B2	3/2009	Diab et al.
7,499,835	B2	3/2009	Weber et al.
7,500,950	B2	3/2009	Al-Ali et al.
7,509,153	B2	3/2009	Blank et al.
7,509,154	B2	3/2009	Diab et al.
7,509,494	B2	3/2009	Al-Ali
7,510,849	B2	3/2009	Schurman et al.
7,514,725	B2	4/2009	Wojtczuk et al.
7,519,406	B2	4/2009	Blank et al.
7,526,328	B2	4/2009	Diab et al.
D592,507	S	5/2009	Wachman et al.
7,530,942	B1	5/2009	Diab
7,530,949	B2	5/2009	Al-Ali et al.
7,530,955	B2	5/2009	Diab et al.
7,563,110	B2	7/2009	Al-Ali et al.
7,593,230	B2	9/2009	Abul-Haj et al.
7,596,398	B2	9/2009	Al-Ali et al.
7,606,608	B2	10/2009	Blank et al.
7,606,861	B2	10/2009	Killcommons et al.
7,618,375	B2	11/2009	Flaherty et al.
7,620,674	B2	11/2009	Ruchti et al.
D606,659	S	12/2009	Flaherty et al.
7,629,039	B2	12/2009	Eckerbom et al.
7,640,140	B2	12/2009	Ruchti et al.
7,647,083	B2	1/2010	Al-Ali et al.
D609,193	S	2/2010	Al-Ali et al.
7,670,726	B2	3/2010	Lu
7,679,519	B2	3/2010	Lindner et al.
D614,305	S	4/2010	Al-Ali et al.
7,697,966	B2	4/2010	Monfre et al.
7,698,105	B2	4/2010	Ruchti et al.
RE41,317	E	5/2010	Parker Brent
RE41,333	E	5/2010	Blank et al.
7,729,733	B2	6/2010	Al-Ali et al.
7,734,320	B2	6/2010	Al-Ali
7,761,127	B2	7/2010	Al-Ali et al.
7,761,128	B2	7/2010	Al-Ali et al.
7,764,982	B2	7/2010	Dalke et al.
D621,516	S	8/2010	Kiani et al.
7,791,155	B2	9/2010	Diab
7,801,581	B2	9/2010	Diab
7,822,452	B2	10/2010	Schurman et al.
RE41,912	E	11/2010	Parker Brent
7,844,313	B2	11/2010	Kiani et al.
7,844,314	B2	11/2010	Al-Ali
7,844,315	B2	11/2010	Al-Ali
7,865,222	B2	1/2011	Weber et al.
7,873,497	B2	1/2011	Weber et al.
7,880,606	B2	2/2011	Al-Ali
7,880,626	B2	2/2011	Al-Ali et al.
7,891,355	B2	2/2011	Al-Ali et al.
7,894,868	B2	2/2011	Al-Ali et al.
7,899,507	B2	3/2011	Al-Ali et al.
7,899,518	B2	3/2011	Trepagnier et al.
7,904,132	B2	3/2011	Weber et al.
7,909,772	B2	3/2011	Popov et al.
7,910,875	B2	3/2011	Al-Ali
7,919,713	B2	4/2011	Al-Ali et al.
7,937,128	B2	5/2011	Al-Ali
7,937,129	B2	5/2011	Mason et al.
7,937,130	B2	5/2011	Diab et al.
7,941,199	B2	5/2011	Kiani
7,951,086	B2	5/2011	Flaherty et al.
7,957,780	B2	6/2011	Lamego et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,962,188	B2	6/2011	Kiani et al.
7,962,190	B1	6/2011	Diab et al.
7,976,472	B2	7/2011	Kiani
7,988,637	B2	8/2011	Diab
7,990,382	B2	8/2011	Kiani
7,991,446	B2	8/2011	Ali et al.
8,000,761	B2	8/2011	Al-Ali
8,008,088	B2	8/2011	Bellott et al.
RE42,753	E	9/2011	Kiani-Azarbayjany et al.
8,019,400	B2	9/2011	Diab et al.
8,028,701	B2	10/2011	Al-Ali et al.
8,029,765	B2	10/2011	Bellott et al.
8,036,727	B2	10/2011	Schurman et al.
8,036,728	B2	10/2011	Diab et al.
8,046,040	B2	10/2011	Ali et al.
8,046,041	B2	10/2011	Diab et al.
8,046,042	B2	10/2011	Diab et al.
8,048,040	B2	11/2011	Kiani
8,050,728	B2	11/2011	Al-Ali et al.
RE43,169	E	2/2012	Parker
8,118,620	B2	2/2012	Al-Ali et al.
8,126,528	B2	2/2012	Diab et al.
8,128,572	B2	3/2012	Diab et al.
8,130,105	B2	3/2012	Al-Ali et al.
8,145,287	B2	3/2012	Diab et al.
8,150,487	B2	4/2012	Diab et al.
8,175,672	B2	5/2012	Parker
8,180,420	B2	5/2012	Diab et al.
8,182,443	B1	5/2012	Kiani
8,185,180	B2	5/2012	Diab et al.
8,190,223	B2	5/2012	Al-Ali et al.
8,190,227	B2	5/2012	Diab et al.
8,203,438	B2	6/2012	Kiani et al.
8,203,704	B2	6/2012	Merritt et al.
8,204,566	B2	6/2012	Schurman et al.
8,219,172	B2	7/2012	Schurman et al.
8,224,411	B2	7/2012	Al-Ali et al.
8,228,181	B2	7/2012	Al-Ali
8,229,532	B2	7/2012	Davis
8,229,533	B2	7/2012	Diab et al.
8,233,955	B2	7/2012	Al-Ali et al.
8,244,325	B2	8/2012	Al-Ali et al.
8,255,026	B1	8/2012	Al-Ali
8,255,027	B2	8/2012	Al-Ali et al.
8,255,028	B2	8/2012	Al-Ali et al.
8,260,577	B2	9/2012	Weber et al.
8,265,723	B1	9/2012	McHale et al.
8,274,360	B2	9/2012	Sampath et al.
8,280,473	B2	10/2012	Al-Ali
8,301,217	B2	10/2012	Al-Ali et al.
8,306,596	B2	11/2012	Schurman et al.
8,310,336	B2	11/2012	Muhsin et al.
8,315,683	B2	11/2012	Al-Ali et al.
RE43,860	E	12/2012	Parker
8,337,403	B2	12/2012	Al-Ali et al.
8,346,330	B2	1/2013	Lamego
8,353,842	B2	1/2013	Al-Ali et al.
8,355,766	B2	1/2013	MacNeish, III et al.
8,359,080	B2	1/2013	Diab et al.
8,364,223	B2	1/2013	Al-Ali et al.
8,364,226	B2	1/2013	Diab et al.
8,374,665	B2	2/2013	Lamego
8,385,995	B2	2/2013	Al-Ali et al.
8,385,996	B2	2/2013	Dalke et al.
8,388,353	B2	3/2013	Kiani et al.
8,399,822	B2	3/2013	Al-Ali
8,401,602	B2	3/2013	Kiani
8,405,608	B2	3/2013	Al-Ali et al.
8,414,499	B2	4/2013	Al-Ali et al.
8,418,524	B2	4/2013	Al-Ali
8,423,106	B2	4/2013	Lamego et al.
8,428,967	B2	4/2013	Olsen et al.
8,430,817	B1	4/2013	Al-Ali et al.
8,437,825	B2	5/2013	Dalvi et al.
8,455,290	B2	6/2013	Siskavich
8,457,703	B2	6/2013	Al-Ali
8,457,707	B2	6/2013	Kiani
8,463,349	B2	6/2013	Diab et al.
8,466,286	B2	6/2013	Bellott et al.
8,471,713	B2	6/2013	Poeze et al.
8,473,020	B2	6/2013	Kiani et al.
8,483,787	B2	7/2013	Al-Ali et al.
8,489,364	B2	7/2013	Weber et al.
8,498,684	B2	7/2013	Weber et al.
8,504,128	B2	8/2013	Blank et al.
8,509,867	B2	8/2013	Workman et al.
8,515,509	B2	8/2013	Bruinsma et al.
8,523,781	B2	9/2013	Al-Ali
8,529,301	B2	9/2013	Al-Ali et al.
8,532,727	B2	9/2013	Ali et al.
8,532,728	B2	9/2013	Diab et al.
D692,145	S	10/2013	Al-Ali et al.
8,547,209	B2	10/2013	Kiani et al.
8,548,548	B2	10/2013	Al-Ali
8,548,549	B2	10/2013	Schurman et al.
8,548,550	B2	10/2013	Al-Ali et al.
8,560,032	B2	10/2013	Al-Ali et al.
8,560,034	B1	10/2013	Diab et al.
8,570,167	B2	10/2013	Al-Ali
8,570,503	B2	10/2013	Vo et al.
8,571,617	B2	10/2013	Reichgott et al.
8,571,618	B1	10/2013	Lamego et al.
8,571,619	B2	10/2013	Al-Ali et al.
8,577,431	B2	11/2013	Lamego et al.
8,581,732	B2	11/2013	Al-Ali et al.
8,584,345	B2	11/2013	Al-Ali et al.
8,588,880	B2	11/2013	Abdul-Hafiz et al.
8,600,467	B2	12/2013	Al-Ali et al.
8,606,342	B2	12/2013	Diab
8,626,255	B2	1/2014	Al-Ali et al.
8,630,691	B2	1/2014	Lamego et al.
8,634,889	B2	1/2014	Al-Ali et al.
8,641,631	B2	2/2014	Sierra et al.
8,652,060	B2	2/2014	Al-Ali
8,663,107	B2	3/2014	Kiani
8,666,468	B1	3/2014	Al-Ali
8,667,967	B2	3/2014	Al-Ali et al.
8,670,811	B2	3/2014	O'Reilly
8,670,814	B2	3/2014	Diab et al.
8,676,286	B2	3/2014	Weber et al.
8,682,407	B2	3/2014	Al-Ali
RE44,823	E	4/2014	Parker
RE44,875	E	4/2014	Kiani et al.
8,688,183	B2	4/2014	Bruinsma et al.
8,690,799	B2	4/2014	Telfort et al.
8,700,112	B2	4/2014	Kiani
8,702,627	B2	4/2014	Telfort et al.
8,706,179	B2	4/2014	Parker
8,712,494	B1	4/2014	MacNeish, III et al.
8,715,206	B2	5/2014	Telfort et al.
8,718,735	B2	5/2014	Lamego et al.
8,718,737	B2	5/2014	Diab et al.
8,718,738	B2	5/2014	Blank et al.
8,720,249	B2	5/2014	Al-Ali
8,721,541	B2	5/2014	Al-Ali et al.
8,721,542	B2	5/2014	Al-Ali et al.
8,723,677	B1	5/2014	Kiani
8,740,792	B1	6/2014	Kiani et al.
8,754,776	B2	6/2014	Poeze et al.
8,755,535	B2	6/2014	Telfort et al.
8,755,856	B2	6/2014	Diab et al.
8,755,872	B1	6/2014	Marinow
8,761,850	B2	6/2014	Lamego
8,764,671	B2	7/2014	Kiani
8,768,423	B2	7/2014	Shakespeare et al.
8,771,204	B2	7/2014	Telfort et al.
8,777,634	B2	7/2014	Kiani et al.
8,781,543	B2	7/2014	Diab et al.
8,781,544	B2	7/2014	Al-Ali et al.
8,781,549	B2	7/2014	Al-Ali et al.
8,788,003	B2	7/2014	Schurman et al.
8,790,268	B2	7/2014	Al-Ali
8,801,613	B2	8/2014	Al-Ali et al.
8,821,397	B2	9/2014	Al-Ali et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,821,415 B2 9/2014 Al-Ali et al.
8,830,449 B1 9/2014 Lamego et al.
8,831,700 B2 9/2014 Schurman et al.
8,840,549 B2 9/2014 Al-Ali et al.
8,847,740 B2 9/2014 Kiani et al.
8,849,365 B2 9/2014 Smith et al.
8,852,094 B2 10/2014 Al-Ali et al.
8,852,994 B2 10/2014 Wojtczuk et al.
8,868,147 B2 10/2014 Stippick et al.
8,868,150 B2 10/2014 Al-Ali et al.
8,870,792 B2 10/2014 Al-Ali et al.
8,886,271 B2 11/2014 Kiani et al.
8,888,539 B2 11/2014 Al-Ali et al.
8,888,708 B2 11/2014 Diab et al.
8,892,180 B2 11/2014 Weber et al.
8,897,847 B2 11/2014 Al-Ali
8,909,310 B2 12/2014 Lamego et al.
8,911,377 B2 12/2014 Al-Ali
8,912,909 B2 12/2014 Al-Ali et al.
8,920,317 B2 12/2014 Al-Ali et al.
8,921,699 B2 12/2014 Al-Ali et al.
8,922,382 B2 12/2014 Al-Ali et al.
8,929,964 B2 1/2015 Al-Ali et al.
8,942,777 B2 1/2015 Diab et al.
8,948,834 B2 2/2015 Diab et al.
8,948,835 B2 2/2015 Diab
8,965,471 B2 2/2015 Lamego et al.
8,983,564 B2 3/2015 Al-Ali
8,989,831 B2 3/2015 Al-Ali et al.
8,996,085 B2 3/2015 Kiani et al.
8,998,809 B2 4/2015 Kiani
9,028,429 B2 5/2015 Telfort et al.
9,037,207 B2 5/2015 Al-Ali et al.
9,060,721 B2 6/2015 Reichgott et al.
9,066,666 B2 6/2015 Kiani
9,066,680 B1 6/2015 Al-Ali et al.
9,072,474 B2 7/2015 Al-Ali et al.
9,078,560 B2 7/2015 Schurman et al.
9,084,569 B2 7/2015 Weber et al.
9,095,316 B2 8/2015 Welch et al.
9,106,038 B2 8/2015 Telfort et al.
9,107,625 B2 8/2015 Telfort et al.
9,107,626 B2 8/2015 Al-Ali et al.
9,113,831 B2 8/2015 Al-Ali
9,113,832 B2 8/2015 Al-Ali
9,119,595 B2 9/2015 Lamego
9,131,881 B2 9/2015 Diab et al.
9,131,882 B2 9/2015 Al-Ali et al.
9,131,883 B2 9/2015 Al-Ali
9,131,917 B2 9/2015 Telfort et al.
9,138,180 B1 9/2015 Coverston et al.
9,138,182 B2 9/2015 Al-Ali et al.
9,138,192 B2 9/2015 Weber et al.
9,142,117 B2 9/2015 Muhsin et al.
9,153,112 B1 10/2015 Kiani et al.
9,153,121 B2 10/2015 Kiani et al.
9,161,696 B2 10/2015 Al-Ali et al.
9,161,713 B2 10/2015 Al-Ali et al.
9,167,995 B2 10/2015 Lamego et al.
9,176,141 B2 11/2015 Al-Ali et al.
9,186,102 B2 11/2015 Bruinsma et al.
9,192,312 B2 11/2015 Al-Ali
9,192,329 B2 11/2015 Al-Ali
9,192,351 B1 11/2015 Telfort et al.
9,195,385 B2 11/2015 Al-Ali et al.
9,211,072 B2 12/2015 Kiani
9,211,095 B1 12/2015 Al-Ali
9,218,454 B2 12/2015 Kiani et al.
9,226,696 B2 1/2016 Kiani
9,241,662 B2 1/2016 Al-Ali et al.
9,245,668 B1 1/2016 Vo et al.
9,259,185 B2 2/2016 Abdul-Hafiz et al.
9,267,572 B2 2/2016 Barker et al.
9,277,880 B2 3/2016 Poeze et al.
9,289,167 B2 3/2016 Diab et al.
9,295,421 B2 3/2016 Kiani et al.
9,307,928 B1 4/2016 Al-Ali et al.
9,323,894 B2 4/2016 Kiani
D755,392 S 5/2016 Hwang et al.
9,326,712 B1 5/2016 Kiani
9,333,316 B2 5/2016 Kiani
9,339,220 B2 5/2016 Lamego et al.
9,341,565 B2 5/2016 Lamego et al.
9,351,673 B2 5/2016 Diab et al.
9,351,675 B2 5/2016 Al-Ali et al.
9,364,181 B2 6/2016 Kiani et al.
9,368,671 B2 6/2016 Wojtczuk et al.
9,370,325 B2 6/2016 Al-Ali et al.
9,370,326 B2 6/2016 McHale et al.
9,370,335 B2 6/2016 Al-Ali et al.
9,375,185 B2 6/2016 Ali et al.
9,386,961 B2 7/2016 Al-Ali et al.
9,392,945 B2 7/2016 Al-Ali et al.
9,397,448 B2 7/2016 Al-Ali et al.
9,408,542 B1 8/2016 Kinast et al.
9,436,645 B2 9/2016 Al-Ali et al.
9,445,759 B1 9/2016 Lamego et al.
9,466,919 B2 10/2016 Kiani et al.
9,474,474 B2 10/2016 Lamego et al.
9,480,422 B2 11/2016 Al-Ali
9,480,435 B2 11/2016 Olsen
9,492,110 B2 11/2016 Al-Ali et al.
9,386,953 B2 12/2016 Al-Ali
9,510,779 B2 12/2016 Poeze et al.
9,517,024 B2 12/2016 Kiani et al.
9,532,722 B2 1/2017 Lamego et al.
9,538,949 B2 1/2017 Al-Ali et al.
9,538,980 B2 1/2017 Telfort et al.
9,549,696 B2 1/2017 Lamego et al.
9,554,737 B2 1/2017 Schurman et al.
9,560,996 B2 2/2017 Kiani
9,560,998 B2 2/2017 Al-Ali et al.
9,566,019 B2 2/2017 Al-Ali et al.
9,579,039 B2 2/2017 Jansen et al.
9,622,692 B2 4/2017 Lamego et al.
D788,312 S 5/2017 Al-Ali et al.
9,649,054 B2 5/2017 Lamego et al.
9,697,928 B2 7/2017 Al-Ali et al.
9,717,458 B2 8/2017 Lamego et al.
9,724,016 B1 8/2017 Al-Ali et al.
9,724,024 B2 8/2017 Al-Ali
9,724,025 B1 8/2017 Kiani et al.
9,749,232 B2 8/2017 Sampath et al.
9,750,442 B2 9/2017 Olsen
9,750,443 B2 9/2017 Smith et al.
9,750,461 B1 9/2017 Telfort
9,775,545 B2 10/2017 Al-Ali et al.
9,778,079 B1 10/2017 Al-Ali et al.
9,782,077 B2 10/2017 Lamego et al.
9,787,568 B2 10/2017 Lamego et al.
9,808,188 B1 11/2017 Perea et al.
9,839,379 B2 12/2017 Al-Ali et al.
9,839,381 B1 12/2017 Weber et al.
9,847,749 B2 12/2017 Kiani et al.
9,848,800 B1 12/2017 Lee et al.
9,848,807 B2 12/2017 Lamego
9,861,298 B2 1/2018 Eckerbom et al.
9,861,305 B1 1/2018 Weber et al.
9,877,650 B2 1/2018 Muhsin et al.
9,891,079 B2 2/2018 Dalvi
9,924,897 B1 3/2018 Abdul-Hafiz
9,936,917 B2 4/2018 Poeze et al.
9,955,937 B2 5/2018 Telfort
9,965,946 B2 5/2018 Al-Ali et al.
D820,865 S 6/2018 Muhsin et al.
9,986,952 B2 6/2018 Dalvi et al.
D822,215 S 7/2018 Al-Ali et al.
D822,216 S 7/2018 Barker et al.
10,010,276 B2 7/2018 Al-Ali et al.
10,086,138 B1 10/2018 Novak, Jr.
10,111,591 B2 10/2018 Dyell et al.
D833,624 S 11/2018 DeJong et al.
10,123,726 B2 11/2018 Al-Ali et al.
10,123,729 B2 11/2018 Dyell et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D835,282 S 12/2018 Barker et al.
D835,283 S 12/2018 Barker et al.
D835,284 S 12/2018 Barker et al.
D835,285 S 12/2018 Barker et al.
10,149,616 B2 12/2018 Al-Ali et al.
10,154,815 B2 12/2018 Al-Ali et al.
10,159,412 B2 12/2018 Lamego et al.
10,188,348 B2 1/2019 Al-Ali et al.
RE47,218 E 2/2019 Al-Ali
RE47,244 E 2/2019 Kiani et al.
RE47,249 E 2/2019 Kiani et al.
10,205,291 B2 2/2019 Scruggs et al.
10,219,746 B2 3/2019 McHale et al.
10,226,187 B2 3/2019 Al-Ali et al.
10,231,657 B2 3/2019 Al-Ali et al.
10,231,670 B2 3/2019 Blank et al.
RE47,353 E 4/2019 Kiani et al.
10,251,585 B2 4/2019 Al-Ali et al.
10,251,586 B2 4/2019 Lamego
10,279,247 B2 5/2019 Kiani
10,292,664 B2 5/2019 Al-Ali
10,299,720 B2 5/2019 Brown et al.
10,327,337 B2 6/2019 Schmidt et al.
10,327,683 B2 6/2019 Smith et al.
10,327,713 B2 6/2019 Barker et al.
10,332,630 B2 6/2019 Al-Ali
10,383,520 B2 8/2019 Wojtczuk et al.
10,383,527 B2 8/2019 Al-Ali
10,388,120 B2 8/2019 Muhsin et al.
D864,120 S 10/2019 Forrest et al.
10,441,181 B1 10/2019 Telfort et al.
10,441,196 B2 10/2019 Eckerbom et al.
10,448,844 B2 10/2019 Al-Ali et al.
10,448,871 B2 10/2019 Al-Ali et al.
10,456,038 B2 10/2019 Lamego et al.
10,463,340 B2 11/2019 Telfort et al.
10,471,159 B1 11/2019 Lapotko et al.
10,505,311 B2 12/2019 Al-Ali et al.
10,524,738 B2 1/2020 Olsen
10,532,174 B2 1/2020 Al-Ali
10,537,285 B2 1/2020 Shreim et al.
10,542,903 B2 1/2020 Al-Ali et al.
10,555,678 B2 2/2020 Dalvi et al.
10,568,553 B2 2/2020 O'Neil et al.
RE47,882 E 3/2020 Al-Ali
10,575,779 B2 3/2020 Poeze et al.
10,608,817 B2 3/2020 Haider et al.
D880,477 S 4/2020 Forrest et al.
10,617,302 B2 4/2020 Al-Ali et al.
10,617,335 B2 4/2020 Al-Ali et al.
10,637,181 B2 4/2020 Al-Ali et al.
D897,098 S 9/2020 Al-Ali
10,827,961 B1 11/2020 Iyengar et al.
10,828,007 B1 11/2020 Telfort et al.
10,832,818 B2 11/2020 Muhsin et al.
10,849,554 B2 12/2020 Shreim et al.
10,856,750 B2 12/2020 Indorf et al.
2001/0034477 A1 10/2001 Mansfield et al.
2001/0039483 A1 11/2001 Brand et al.
2001/0044700 A1 11/2001 Kobayashi et al.
2001/0045532 A1 11/2001 Schulz et al.
2002/0010401 A1 1/2002 Bushmakin et al.
2002/0021269 A1 2/2002 Rast
2002/0026107 A1 2/2002 Kiani et al.
2002/0035315 A1 3/2002 Ali et al.
2002/0035318 A1 3/2002 Mannheimer et al.
2002/0038078 A1 3/2002 Ito
2002/0038080 A1 3/2002 Makarewicz et al.
2002/0038081 A1 3/2002 Fein et al.
2002/0051290 A1 5/2002 Hannington
2002/0058864 A1 5/2002 Mansfield et al.
2002/0059047 A1 5/2002 Haaland
2002/0068858 A1 6/2002 Braig et al.
2002/0082488 A1 6/2002 Al-Ali et al.
2002/0095076 A1 7/2002 Krausman et al.
2002/0095077 A1 7/2002 Swedlow et al.
2002/0095078 A1 7/2002 Mannheimer et al.
2002/0111748 A1 8/2002 Kobayashi et al.
2002/0115919 A1 8/2002 Al-Ali
2002/0133080 A1 9/2002 Apruzzese et al.
2002/0154665 A1 10/2002 Funabashi et al.
2002/0156353 A1 10/2002 Larson
2002/0159002 A1 10/2002 Chang
2002/0161291 A1 10/2002 Kiani et al.
2002/0165440 A1 11/2002 Mason et al.
2002/0183819 A1 12/2002 Struble
2002/0198442 A1 12/2002 Rantala et al.
2003/0013975 A1 1/2003 Kiani
2003/0018243 A1 1/2003 Gerhardt et al.
2003/0045784 A1 3/2003 Palatnik et al.
2003/0045785 A1 3/2003 Diab et al.
2003/0049232 A1 3/2003 Page et al.
2003/0109775 A1 6/2003 O'Neil et al.
2003/0116769 A1 6/2003 Song et al.
2003/0117296 A1 6/2003 Seely
2003/0120160 A1 6/2003 Yarita
2003/0120164 A1 6/2003 Nielsen et al.
2003/0135099 A1 7/2003 Al-Ali
2003/0139657 A1 7/2003 Solenberger
2003/0144582 A1 7/2003 Cohen et al.
2003/0156288 A1 8/2003 Barnum et al.
2003/0160257 A1 8/2003 Bader et al.
2003/0195402 A1 10/2003 Fein et al.
2003/0212312 A1 11/2003 Coffin, IV et al.
2004/0006261 A1 1/2004 Swedlow et al.
2004/0033618 A1 2/2004 Haass et al.
2004/0034898 A1 2/2004 Bruegl
2004/0039271 A1 2/2004 Blank et al.
2004/0059209 A1 3/2004 Al-Ali et al.
2004/0064259 A1 4/2004 Haaland et al.
2004/0081621 A1 4/2004 Arndt et al.
2004/0092805 A1 5/2004 Yarita
2004/0097797 A1 5/2004 Porges et al.
2004/0106163 A1 6/2004 Workman, Jr. et al.
2004/0133087 A1 7/2004 Ali et al.
2004/0138538 A1 7/2004 Stetson
2004/0138540 A1 7/2004 Baker, Jr. et al.
2004/0147822 A1 7/2004 Al-Ali et al.
2004/0147823 A1 7/2004 Kiani et al.
2004/0158132 A1 8/2004 Zaleski
2004/0158134 A1 8/2004 Diab et al.
2004/0158135 A1 8/2004 Baker, Jr. et al.
2004/0158162 A1 8/2004 Narimatsu
2004/0162472 A1 8/2004 Berson et al.
2004/0167382 A1 8/2004 Gardner et al.
2004/0171940 A1 9/2004 Narimatsu
2004/0176670 A1 9/2004 Takamura et al.
2004/0181134 A1 9/2004 Baker, Jr. et al.
2004/0199063 A1 10/2004 O'Neil et al.
2004/0204639 A1 10/2004 Casciani et al.
2004/0204868 A1 10/2004 Maynard et al.
2004/0229391 A1 11/2004 Ohya et al.
2004/0260191 A1 12/2004 Stubbs et al.
2004/0262046 A1 12/2004 Simon et al.
2004/0267103 A1 12/2004 Li et al.
2004/0267140 A1 12/2004 Ito et al.
2005/0011488 A1 1/2005 Doucet
2005/0043902 A1 2/2005 Haaland et al.
2005/0049469 A1 3/2005 Aoyagi et al.
2005/0054908 A1 3/2005 Blank et al.
2005/0055276 A1 3/2005 Kiani et al.
2005/0070773 A1 3/2005 Chin et al.
2005/0070775 A1 3/2005 Chin et al.
2005/0075546 A1 4/2005 Samsoondar et al.
2005/0085704 A1 4/2005 Schulz et al.
2005/0085735 A1 4/2005 Baker, Jr. et al.
2005/0115561 A1 6/2005 Stahmann et al.
2005/0124871 A1 6/2005 Baker, Jr. et al.
2005/0143634 A1 6/2005 Baker, Jr. et al.
2005/0143943 A1 6/2005 Brown
2005/0148834 A1 7/2005 Hull et al.
2005/0184895 A1 8/2005 Petersen et al.
2005/0187446 A1 8/2005 Nordstrom et al.
2005/0187447 A1 8/2005 Chew et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0187448	A1	8/2005	Petersen et al.
2005/0187449	A1	8/2005	Chew et al.
2005/0187450	A1	8/2005	Chew et al.
2005/0187452	A1	8/2005	Petersen et al.
2005/0187453	A1	8/2005	Petersen et al.
2005/0197549	A1	9/2005	Baker, Jr.
2005/0197579	A1	9/2005	Baker, Jr.
2005/0197793	A1	9/2005	Baker, Jr.
2005/0203357	A1	9/2005	Debreczeny et al.
2005/0207943	A1	9/2005	Puzey
2005/0209515	A1	9/2005	Hockersmith et al.
2005/0228253	A1	10/2005	Debreczeny
2005/0234317	A1	10/2005	Kiani
2005/0250997	A1	11/2005	Takedo et al.
2005/0261673	A1	11/2005	Bonner et al.
2005/0277819	A1	12/2005	Kiani et al.
2006/0030764	A1	2/2006	Porges et al.
2006/0073719	A1	4/2006	Kiani
2006/0189871	A1	8/2006	Al-Ali et al.
2006/0210120	A1	9/2006	Rowe et al.
2006/0211922	A1	9/2006	Al-Ali et al.
2006/0211923	A1	9/2006	Al-Ali et al.
2006/0211924	A1	9/2006	Smith et al.
2006/0211925	A1	9/2006	Lamego et al.
2006/0211932	A1	9/2006	Al-Ali et al.
2006/0226992	A1	10/2006	Al-Ali et al.
2006/0229509	A1	10/2006	Al-Ali et al.
2006/0238358	A1	10/2006	Al-Ali et al.
2006/0241363	A1	10/2006	Al-Ali et al.
2006/0264718	A1	11/2006	Ruchti et al.
2007/0073116	A1	3/2007	Kiani et al.
2007/0078311	A1	4/2007	Al-Ali et al.
2007/0093701	A1	4/2007	Myers
2007/0149864	A1	6/2007	Laakkonen
2007/0129616	A1	7/2007	Rantala
2007/0180140	A1	8/2007	Welch et al.
2007/0185397	A1	8/2007	Govari et al.
2007/0244377	A1	10/2007	Cozad et al.
2007/0282478	A1	12/2007	Al-Ali et al.
2008/0030468	A1	2/2008	Ali et al.
2008/0064965	A1	3/2008	Jay et al.
2008/0094228	A1	4/2008	Welch et al.
2008/0200783	A9	8/2008	Blank et al.
2008/0221418	A1	9/2008	Al-Ali et al.
2008/0281174	A1	11/2008	Dietiker
2009/0036759	A1	2/2009	Ault et al.
2009/0093687	A1	4/2009	Telfort et al.
2009/0095926	A1	4/2009	MacNeish, III
2009/0163775	A1	6/2009	Barrett et al.
2009/0247849	A1	10/2009	McCutcheon et al.
2009/0247924	A1	10/2009	Lamego et al.
2009/0247984	A1	10/2009	Lamego et al.
2009/0275813	A1	11/2009	Davis
2009/0275844	A1	11/2009	Al-Ali
2009/0299157	A1	12/2009	Telfort et al.
2010/0004518	A1	1/2010	Vo et al.
2010/0022859	A1	1/2010	Al-Ali et al.
2010/0030040	A1	2/2010	Poeze et al.
2010/0099964	A1	4/2010	O'Reilly et al.
2010/0234718	A1	9/2010	Sampath et al.
2010/0261979	A1	10/2010	Kiani
2010/0270257	A1	10/2010	Wachman et al.
2010/0317936	A1	12/2010	Al-Ali et al.
2011/0001605	A1	1/2011	Kiani et al.
2011/0009719	A1	1/2011	Al-Ali et al.
2011/0028806	A1	2/2011	Merritt et al.
2011/0028809	A1	2/2011	Goodman
2011/0040197	A1	2/2011	Welch et al.
2011/0082711	A1	4/2011	Poeze et al.
2011/0087081	A1	4/2011	Kiani et al.
2011/0105854	A1	5/2011	Kiani et al.
2011/0118561	A1	5/2011	Tani et al.
2011/0125060	A1	5/2011	Telfort et al.
2011/0137297	A1	6/2011	Kiani et al.
2011/0172498	A1	7/2011	Olsen et al.
2011/0172967	A1	7/2011	Al-Ali et al.
2011/0208015	A1	8/2011	Welch et al.
2011/0209915	A1	9/2011	Telfort et al.
2011/0213212	A1	9/2011	Al-Ali
2011/0230733	A1	9/2011	Al-Ali
2011/0237911	A1	9/2011	Lamego et al.
2011/0237914	A1	9/2011	Lamego
2011/0237969	A1	9/2011	Eckerbom et al.
2011/0288383	A1	11/2011	Diab
2011/0301444	A1	12/2011	Al-Ali
2012/0041316	A1	2/2012	Al-Ali et al.
2012/0046530	A1	2/2012	Al-Ali
2012/0046557	A1	2/2012	Kiani
2012/0059267	A1	3/2012	Lamego et al.
2012/0088984	A1	4/2012	Al-Ali et al.
2012/0116175	A1	5/2012	Al-Ali et al.
2012/0123231	A1	5/2012	O'Reilly
2012/0161970	A1	6/2012	Al-Ali
2012/0165629	A1	6/2012	Merritt et al.
2012/0179006	A1	7/2012	Jansen et al.
2012/0209082	A1	8/2012	Al-Ali
2012/0209084	A1	8/2012	Olsen et al.
2012/0226117	A1	9/2012	Lamego et al.
2012/0227739	A1	9/2012	Kiani
2012/0232359	A1	9/2012	Al-Ali et al.
2012/0232363	A1	9/2012	Al-Ali et al.
2012/0265039	A1	10/2012	Kiani
2012/0283524	A1	11/2012	Kiani et al.
2012/0286955	A1	11/2012	Welch et al.
2012/0296178	A1	11/2012	Lamego et al.
2012/0319816	A1	12/2012	Al-Ali
2012/0330112	A1	12/2012	Lamego et al.
2013/0006076	A1	1/2013	McHale et al.
2013/0023775	A1	1/2013	Lamego et al.
2013/0041591	A1	2/2013	Lamego
2013/0045685	A1	2/2013	Kiani
2013/0046204	A1	2/2013	Lamego et al.
2013/0060108	A1	3/2013	Schurman et al.
2013/0060147	A1	3/2013	Welch et al.
2013/0079610	A1	3/2013	Al-Ali
2013/0096405	A1	4/2013	Garfio
2013/0096936	A1	4/2013	Sampath et al.
2013/0109935	A1	5/2013	Al-Ali et al.
2013/0162433	A1	6/2013	Muhsin et al.
2013/0172701	A1	7/2013	Smith et al.
2013/0178749	A1	7/2013	Lamego
2013/0190581	A1	7/2013	Al-Ali et al.
2013/0197328	A1	8/2013	Diab et al.
2013/0211214	A1	8/2013	Olsen
2013/0243021	A1	9/2013	Siskavich
2013/0253334	A1	9/2013	Al-Ali et al.
2013/0262730	A1	10/2013	Al-Ali et al.
2013/0267804	A1	10/2013	Al-Ali
2013/0274571	A1	10/2013	Diab et al.
2013/0274572	A1	10/2013	Al-Ali et al.
2013/0296672	A1	11/2013	O'Neil et al.
2013/0296713	A1	11/2013	Al-Ali et al.
2013/0317327	A1	11/2013	Al-Ali
2013/0317370	A1	11/2013	Dalvi et al.
2013/0324808	A1	12/2013	Al-Ali et al.
2013/0324817	A1	12/2013	Diab
2013/0331660	A1	12/2013	Al-Ali et al.
2013/0331670	A1	12/2013	Kiani
2013/0338461	A1	12/2013	Lamego et al.
2013/0345921	A1	12/2013	Al-Ali et al.
2014/0012100	A1	1/2014	Al-Ali et al.
2014/0025306	A1	1/2014	Weber et al.
2014/0031650	A1	1/2014	Weber et al.
2014/0034353	A1	2/2014	Al-Ali et al.
2014/0051952	A1	2/2014	Reichgott et al.
2014/0051953	A1	2/2014	Lamego et al.
2014/0051954	A1	2/2014	Al-Ali et al.
2014/0058230	A1	2/2014	Abdul-Hafiz et al.
2014/0066783	A1	3/2014	Kiani et al.
2014/0073167	A1	3/2014	Al-Ali et al.
2014/0077956	A1	3/2014	Sampath et al.
2014/0081097	A1	3/2014	Al-Ali et al.
2014/0081100	A1	3/2014	Muhsin et al.
2014/0081175	A1	3/2014	Telfort

(56) **References Cited**

U.S. PATENT DOCUMENTS

2014/0094667 A1 4/2014 Schurman et al.
2014/0100434 A1 4/2014 Diab et al.
2014/0114199 A1 4/2014 Lamego et al.
2014/0120564 A1 5/2014 Workman et al.
2014/0121482 A1 5/2014 Merritt et al.
2014/0121483 A1 5/2014 Kiani
2014/0125495 A1 5/2014 Al-Ali
2014/0127137 A1 5/2014 Bellott et al.
2014/0128696 A1 5/2014 Al-Ali
2014/0128699 A1 5/2014 Al-Ali et al.
2014/0129702 A1 5/2014 Lamego et al.
2014/0135588 A1 5/2014 Al-Ali et al.
2014/0142399 A1 5/2014 Al-Ali et al.
2014/0142401 A1 5/2014 Al-Ali et al.
2014/0142402 A1 5/2014 Al-Ali et al.
2014/0155712 A1 6/2014 Lamego et al.
2014/0163344 A1 6/2014 Al-Ali
2014/0163402 A1 6/2014 Lamego et al.
2014/0166076 A1 6/2014 Kiani et al.
2014/0171763 A1 6/2014 Diab
2014/0180038 A1 6/2014 Kiani
2014/0180154 A1 6/2014 Sierra et al.
2014/0180160 A1 6/2014 Brown et al.
2014/0187973 A1 7/2014 Brown et al.
2014/0194709 A1 7/2014 Al-Ali et al.
2014/0194711 A1 7/2014 Al-Ali
2014/0194766 A1 7/2014 Al-Ali et al.
2014/0200420 A1 7/2014 Al-Ali
2014/0200422 A1 7/2014 Weber et al.
2014/0206963 A1 7/2014 Al-Ali
2014/0213864 A1 7/2014 Abdul-Hafiz et al.
2014/0243627 A1 8/2014 Diab et al.
2014/0266790 A1 9/2014 Al-Ali et al.
2014/0275808 A1 9/2014 Poeze et al.
2014/0275835 A1 9/2014 Lamego et al.
2014/0275871 A1 9/2014 Lamego et al.
2014/0275872 A1 9/2014 Merritt et al.
2014/0275881 A1 9/2014 Lamego et al.
2014/0276115 A1 9/2014 Dalvi et al.
2014/0288400 A1 9/2014 Diab et al.
2014/0296664 A1 10/2014 Bruinsma et al.
2014/0303520 A1 10/2014 Telfort et al.
2014/0309506 A1 10/2014 Lamego
2014/0309559 A1 10/2014 Telfort et al.
2014/0316217 A1 10/2014 Purdon et al.
2014/0316218 A1 10/2014 Purdon et al.
2014/0316228 A1 10/2014 Blank et al.
2014/0323825 A1 10/2014 Al-Ali et al.
2014/0323897 A1 10/2014 Brown et al.
2014/0323898 A1 10/2014 Purdon et al.
2014/0330092 A1 11/2014 Al-Ali et al.
2014/0330098 A1 11/2014 Merritt et al.
2014/0330099 A1 11/2014 Al-Ali et al.
2014/0333440 A1 11/2014 Kiani
2014/0336481 A1 11/2014 Shakespeare et al.
2014/0343436 A1 11/2014 Kiani
2014/0357966 A1 12/2014 Al-Ali et al.
2014/0371548 A1 12/2014 Al-Ali et al.
2014/0371632 A1 12/2014 Al-Ali et al.
2014/0378784 A1 12/2014 Kiani et al.
2015/0005600 A1 1/2015 Blank et al.
2015/0011907 A1 1/2015 Purdon et al.
2015/0012231 A1 1/2015 Poeze et al.
2015/0018650 A1 1/2015 Al-Ali et al.
2015/0025406 A1 1/2015 Al-Ali
2015/0032029 A1 1/2015 Al-Ali et al.
2015/0038859 A1 2/2015 Dalvi et al.
2015/0045637 A1 2/2015 Dalvi
2015/0045685 A1 2/2015 Al-Ali et al.
2015/0051462 A1 2/2015 Olsen
2015/0073241 A1 3/2015 Lamego
2015/0080754 A1 3/2015 Purdon et al.
2015/0087936 A1 3/2015 Al-Ali et al.
2015/0094546 A1 4/2015 Al-Ali
2015/0097701 A1 4/2015 Al-Ali et al.
2015/0099324 A1 4/2015 Wojtczuk et al.
2015/0099950 A1 4/2015 Al-Ali et al.
2015/0099951 A1 4/2015 Al-Ali et al.
2015/0099955 A1 4/2015 Al-Ali et al.
2015/0101844 A1 4/2015 Al-Ali et al.
2015/0106121 A1 4/2015 Muhsin et al.
2015/0112151 A1 4/2015 Muhsin et al.
2015/0116076 A1 4/2015 Al-Ali et al.
2015/0126830 A1 5/2015 Schurman et al.
2015/0133755 A1 5/2015 Smith et al.
2015/0140863 A1 5/2015 Al-Ali et al.
2015/0141781 A1 5/2015 Weber et al.
2015/0165312 A1 6/2015 Kiani
2015/0196237 A1 7/2015 Lamego
2015/0201874 A1 7/2015 Diab
2015/0208966 A1 7/2015 Al-Ali
2015/0216459 A1 8/2015 Al-Ali et al.
2015/0230755 A1 8/2015 Al-Ali et al.
2015/0238722 A1 8/2015 Al-Ali
2015/0245773 A1 9/2015 Lamego et al.
2015/0245793 A1 9/2015 Al-Ali et al.
2015/0245794 A1 9/2015 Al-Ali
2015/0257689 A1 9/2015 Al-Ali et al.
2015/0272514 A1 10/2015 Kiani et al.
2015/0351697 A1 12/2015 Weber et al.
2015/0351704 A1 12/2015 Kiani et al.
2015/0359429 A1 12/2015 Al-Ali et al.
2015/0366472 A1 12/2015 Kiani
2015/0366507 A1 12/2015 Blank
2015/0374298 A1 12/2015 Al-Ali et al.
2015/0380875 A1 12/2015 Coverston et al.
2016/0000362 A1 1/2016 Diab et al.
2016/0007930 A1 1/2016 Weber et al.
2016/0029932 A1 2/2016 Al-Ali
2016/0029933 A1 2/2016 Al-Ali et al.
2016/0045118 A1 2/2016 Kiani
2016/0051205 A1 2/2016 Al-Ali et al.
2016/0058338 A1 3/2016 Schurman et al.
2016/0058347 A1 3/2016 Reichgott et al.
2016/0066823 A1 3/2016 Al-Ali et al.
2016/0066824 A1 3/2016 Al-Ali et al.
2016/0066879 A1 3/2016 Telfort et al.
2016/0072429 A1 3/2016 Kiani et al.
2016/0073967 A1 3/2016 Lamego et al.
2016/0081552 A1 3/2016 Wojtczuk et al.
2016/0095543 A1 4/2016 Telfort et al.
2016/0095548 A1 4/2016 Al-Ali et al.
2016/0103598 A1 4/2016 Al-Ali et al.
2016/0113527 A1 4/2016 Al-Ali et al.
2016/0143548 A1 5/2016 Al-Ali
2016/0166182 A1 6/2016 Al-Ali
2016/0166183 A1 6/2016 Poeze et al.
2016/0166188 A1 6/2016 Bruinsma et al.
2016/0166210 A1 6/2016 Al-Ali
2016/0192869 A1 7/2016 Kiani et al.
2016/0196388 A1 7/2016 Lamego
2016/0197436 A1 7/2016 Barker et al.
2016/0213281 A1 7/2016 Eckerbom et al.
2016/0228043 A1 8/2016 O'Neil et al.
2016/0233632 A1 8/2016 Scruggs et al.
2016/0234944 A1 8/2016 Schmidt et al.
2016/0270735 A1 9/2016 Diab et al.
2016/0283665 A1 9/2016 Sampath et al.
2016/0287090 A1 10/2016 Al-Ali et al.
2016/0287786 A1 10/2016 Kiani
2016/0296169 A1 10/2016 McHale et al.
2016/0310052 A1 10/2016 Al-Ali
2016/0314260 A1 10/2016 Kiani
2016/0324486 A1 11/2016 Al-Ali et al.
2016/0324488 A1 11/2016 Olsen
2016/0327984 A1 11/2016 Al-Ali et al.
2016/0328528 A1 11/2016 Al-Ali et al.
2016/0331332 A1 11/2016 Al-Ali
2016/0367173 A1 12/2016 Dalvi et al.
2017/0007134 A1 1/2017 Al-Ali et al.
2017/0007190 A1 1/2017 Al-Ali et al.
2017/0007198 A1 1/2017 Al-Ali et al.
2017/0014084 A1 1/2017 Al-Ali et al.
2017/0021099 A1 1/2017 Al-Ali et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2017/0024748	A1	1/2017	Haider
2017/0027456	A1	2/2017	Kinast et al.
2017/0042488	A1	2/2017	Muhsin
2017/0055896	A1	3/2017	Al-Ali
2017/0173632	A1	6/2017	Al-Ali
2017/0251974	A1	9/2017	Shreim et al.
2017/0311891	A1	11/2017	Kiani et al.
2018/0007086	A1	3/2018	Smith
2018/0103874	A1	4/2018	Lee et al.
2018/0132770	A1	5/2018	Lamego
2018/0199871	A1	7/2018	Pauley et al.
2018/0213583	A1	7/2018	Al-Ali
2018/0242926	A1	8/2018	Muhsin et al.
2018/0247353	A1	8/2018	Al-Ali et al.
2018/0247712	A1	8/2018	Muhsin et al.
2018/0256087	A1	9/2018	Al-Ali et al.
2018/0289325	A1	10/2018	Poeze et al.
2018/0296161	A1	10/2018	Shreim et al.
2018/0300919	A1	10/2018	Muhsin et al.
2018/0310822	A1	11/2018	Indorf et al.
2018/0310823	A1	11/2018	Al-Ali et al.
2018/0317826	A1	11/2018	Muhsin et al.
2019/0015023	A1	1/2019	Monfre
2019/0117070	A1	4/2019	Muhsin et al.
2019/0200941	A1	7/2019	Chandran et al.
2019/0239787	A1	8/2019	Pauley et al.
2019/0320906	A1	10/2019	Olsen
2019/0320988	A1	10/2019	Ahmed et al.
2019/0350497	A1	11/2019	Al-Ali
2019/0374139	A1	12/2019	Kiani et al.
2019/0374173	A1	12/2019	Kiani et al.
2019/0374713	A1	12/2019	Kiani et al.
2020/0021930	A1	1/2020	Iswanto et al.
2020/0060869	A1	2/2020	Telfort et al.
2020/0111552	A1	4/2020	Ahmed
2020/0113435	A1	4/2020	Muhsin
2020/0113488	A1	4/2020	Al-Ali et al.
2020/0113496	A1	4/2020	Scruggs et al.
2020/0113497	A1	4/2020	Triman et al.
2020/0113520	A1	4/2020	Abdul-Hafiz et al.
2020/0138288	A1	5/2020	Al-Ali et al.
2020/0138368	A1	5/2020	Kiani et al.
2020/0321793	A1	10/2020	Al-Ali et al.
2020/0329983	A1	10/2020	Al-Ali et al.
2020/0329984	A1	10/2020	Al-Ali et al.
2020/0329993	A1	10/2020	Al-Ali et al.
2020/0330037	A1	10/2020	Al-Ali et al.

FOREIGN PATENT DOCUMENTS

EP	0 419 223		3/1991
EP	0 569 670		2/1993
EP	0 675 540		10/1995
EP	0 675 541		10/1995
EP	0469395	B1	2/1996
EP	0417447	B1	10/1997
EP	0606356	B1	6/1998
EP	0734221	B1	7/1998
EP	0 529 412		11/1998
EP	1 080 683		3/2001
EP	1 207 536		5/2002
EP	1 895 892		5/2010
EP	2 476 369		7/2012
EP	2 139 383		2/2013
EP	2 476 369		10/2014
EP	2 305 104		10/2018
JP	61-28172		2/1986
JP	62-000324		1/1987
JP	63-275327		11/1988
JP	64-500495		2/1989
JP	2-126829		5/1990
JP	2-145457		12/1990
JP	03-252604		11/1991
JP	05-200017		8/1993
JP	05-207993		8/1993
JP	H06-178776		6/1994
JP	6-505903		7/1994
JP	6-237013		8/1994
JP	H07-391		1/1995
JP	H07-171089		7/1995
JP	H07-171090		7/1995
JP	7-281618		10/1995
JP	07-325546		12/1995
JP	09-108203		4/1997
JP	09-503402		4/1997
JP	9-192120		7/1997
JP	09-308623		12/1997
JP	10-500026		1/1998
JP	10-216112		8/1998
JP	10-509352		9/1998
JP	10-269344	A	10/1998
JP	10-295676		11/1998
JP	10-305026		11/1998
JP	11-037932		2/1999
JP	11-163412		6/1999
JP	11-164826		6/1999
JP	11-506834		6/1999
JP	11-183377		7/1999
JP	2011-508691		7/1999
JP	2000-116625		4/2000
JP	2000-199880		7/2000
JP	2001-504256		3/2001
JP	2002-150821		5/2002
JP	2002-516689		6/2002
JP	2002-228579		8/2002
JP	2002-525151		8/2002
JP	2002-315739		10/2002
JP	2002-352609		12/2002
JP	2003-507718		2/2003
JP	2003-084108		3/2003
JP	2003-521985		7/2003
JP	2004-070179		3/2004
JP	2004-510467		4/2004
JP	2004-173866		6/2004
JP	2004-226277		8/2004
JP	2004-296736		10/2004
JP	2004-532526		10/2004
JP	2004-327760		11/2004
JP	2005-501589		1/2005
JP	2005-253478		9/2005
JP	2008-505706		2/2008
JP	4879913		12/2011
JP	2012-110746		6/2012
JP	2012-130756		7/2012
JP	5096174		9/2012
JP	5166619		3/2013
JP	5328159		8/2013
JP	5456976		1/2014
WO	WO 88/01150		2/1988
WO	WO 88/002020		2/1988
WO	WO 92/16142		10/1992
WO	WO 93/06776		4/1993
WO	WO 95/05621		2/1995
WO	WO 95/16387		6/1995
WO	WO 96/013208		5/1996
WO	WO 96/41138		12/1996
WO	WO 97/01985		1/1997
WO	WO 97/29678		8/1997
WO	WO 97/029710		8/1997
WO	WO 98/43071		10/1998
WO	WO 00/18290		4/2000
WO	WO 00/42911		7/2000
WO	WO 00/59374		10/2000
WO	WO 01/13790		3/2001
WO	WO 01/30414		5/2001
WO	WO 01/058347		8/2001
WO	WO 02/017780		3/2002
WO	WO 02/026123		4/2002
WO	WO 02/089664		11/2002
WO	WO 03/020129		3/2003
WO	WO 03/068060		8/2003
WO	WO 03/077761		9/2003
WO	WO 04/034898		4/2004
WO	WO 04/038801		5/2004

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

WO	WO 05/004712	1/2005
WO	WO 05/011488	2/2005
WO	WO 06/017117	2/2006
WO	WO 06/094107	9/2006
WO	WO 06/094108	9/2006
WO	WO 06/094155	9/2006
WO	WO 06/094168	9/2006
WO	WO 06/094169	9/2006
WO	WO 06/094170	9/2006
WO	WO 06/094171	9/2006
WO	WO 06/094279	9/2006
WO	WO 06/115580	11/2006
WO	WO 06/118654	11/2006
WO	WO 09/013835	1/2009
WO	WO 09/137524	11/2009

OTHER PUBLICATIONS

U.S. Appl. No. 12/082,810, filed Apr. 14, 2008, Al-Ali.
U.S. Appl. No. 14/148,462, filed Jan. 6, 2014, Al-Ali et al.
U.S. Appl. No. 15/694,541, filed Sep. 1, 2017, Smith et al.
"Medical." 50 Ways to Touch Memory. 3rd ed. Dallas: Dallas Semiconductor Corporation, Aug. 1994: pp. 24-25. Print.
"Application Note 84 Use of Add-Only Memory for Secure Storage of Monetary Equivalent Data," Dallas Semiconductor, Jun. 22, 1999, in 5 pages.
Burritt, Mary F.; Current Analytical Approaches to Measuring Blood Analytes; vol. 36; No. 8(B); 1990.
Dallas Semiconductor Corp: DS2430A Announcement, retrieved Jun. 10, 1998, in 2 pages. https://web.archive.org/web/19980610045525/http://daisemi.com/News_Center/New_Products/1996/2430a.html.
European Examination Report, re EP App. No. 06 736 798.7, dated Dec. 2, 2015.
European Examination Report, re EP App. No. 06 736 798.7, dated Jul. 18, 2016.
European Examination Report, re EP App. No. 06 736 798.7, dated Jan. 19, 2018.
European Office Action re EP Application No. 06 736 799.5, dated Nov. 30, 2012.
International Search Report for EP Appl. No. 10191029 completed May 25, 2012 (dated Jun. 5, 2012) in 5 pages.
European Extended Search Report, re EP Application No. 10191029.7, dated Jun. 5, 2012.
European Extended Search Report re EPO App. No. 10162402.1, SR dated Aug. 9, 2010.
European Examination Report dated Apr. 1, 2010, re EP App. No. 08 744 412.1-2319.
European Examination Report dated Mar. 18, 2011, re EP App. No. 08 744 412.1-2319.
European Examination Report dated Sep. 2, 2010, re EP App. No. 08 744 412.1-2319.
European Examination Report, re EP Application No. 12163719.3, dated Feb. 6, 2013.
European Extended Search Report, re EP Application No. 12163719.3, dated Jun. 18, 2012.
Favennec, J.M. "Smart sensors in industry." J. Phys. E: Sci. Instrum. 20(9): Sep. 1987, pp. 1087-1090.
Hall, et al., Jeffrey W.; Near-Infrared Spectrophotometry: A New Dimension in Clinical Chemistry; vol. 38; No. 9; 1992.
International Preliminary Report on Patentability for PCT/US2010/058981 dated Jun. 5, 2012, dated Jun. 14, 2012.
International Search Report for PCT/US2006/007516, dated Jan. 11, 2007, in 4 pages.
Japanese Final Office Action re Amendments re JP Application No. 2007-558249, dated Apr. 17, 2012.
Japanese First Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558207, dated Jun. 28, 2011.
Japanese First Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558247, dated Jun. 28, 2011.
Japanese Office Action (Decision of Rejection), re JP Application No. JP 2007-558328, dated Nov. 20, 2012.
Japanese Office Action (Notice of Allowance), re JP App. No. 2007-558247, dated Oct. 24, 2011.
Japanese Office Action (Notice of Reasons for Rejection) re JP App. No. 2007-558246, dated Jun. 28, 2011.
Japanese Office Action (Notice of Reasons for Rejection), re JP App. No. 2007-558238, dated Jun. 28, 2011.
Japanese Office Action (Official Inquiry) re JP App. No. 2007-558246, dated Dec. 11, 2012.
Japanese Office Action (Official Inquiry), re JP App. No. 2007-558238/Appeal No. 2012-004053, dated Dec. 11, 2012.
Japanese Office Action (Reasons for Rejection) re JP App. No. 2007-558246, dated Nov. 1, 2011.
Japanese Office Action re JP Application No. 2007-558249, dated Aug. 28, 2012.
Japanese Office Action re JP Application No. 2007-558249, dated Jul. 13, 2011.
Japanese Office Action re JP Application No. 2007-558249, dated Nov. 8, 2011.
Japanese Office Action re JP Application No. JP 2007-558208, dated Aug. 23, 2011.
Japanese Office Action re JP Application No. JP 2007-558248, dated Nov. 27, 2012.
Japanese Office Action re JP Application No. JP 2007-558248, dated Nov. 8, 2011.
Japanese Office Action re JP Application No. 2007-558209, dated Oct. 25, 2011.
Japanese Office Action re JP Application No. 2007-558209, dated Oct. 30, 2012.
Japanese Office Action re JP Application No. 2007-558245, dated Oct. 25, 2011.
Japanese Office Action re JP Application No. 2007-558245, dated Jan. 15, 2013.
Japanese Office Action re JP Application No. 2007-558245, dated Oct. 29, 2013.
Japanese Office Action, Decision of Rejection of Amendment, re JP Application No. JP 2007-558328, dated Jun. 25, 2013.
Japanese Office Action, re JP Application No. 2007-558237, dated Aug. 2, 2011.
Japanese Office Action, re JP Application No. 2012-045419, dated Jun. 26, 2012.
Japanese Office Action, re JP Application No. JP 2007-558237, dated Oct. 16, 2012.
Jones, K.L., et al. "A Protocol for Automatic Sensor Detection and Identification in a Wireless Biodevice Network," IEEE, Jun. 1998, 6 pages.
Kuenstner, et al., J. Todd; Measurement of Hemoglobin in Unlysed Blood by Near-Infrared Spectroscopy; vol. 48; No. 4, 1994.
Manzke, et al., B., Multi Wavelength Pulse Oximetry in the Measurement of Hemoglobin Fractions; vol. 2676, 1996.
Naumenko, E. K.; Choice of Wavelengths for Stable Determination of Concentrations of Hemoglobin Derivatives from Absorption Spectra of Erythrocytes; vol. 63; No. 1; pp. 60-66 Jan.-Feb. 1996; Original article submitted Nov. 3, 1994.
Patent Cooperation Treaty (PCT) International Search Report; PCT/US 2006/007389; dated Jul. 17, 2006; pp. 1-9.
PCT International Search Report; PCT/US2006/007387; dated Jul. 17, 2006; pp. 1-9.
PCT International Search Report; PCT/US2006/007388; dated Jul. 17, 2006; pp. 1-9.
PCT International Search Report; PCT/US2006/007506; dated Jul. 17 2006; pp. 1-10.
PCT International Search Report; PCT/US2006/007536; dated Jul. 17, 2006; pp. 1-9.
PCT International Search Report; PCT/US2006/007537; dated Jul. 17, 2006; pp. 1-10.
PCT International Search Report; PCT/US2006/007538; dated Jul. 17, 2006; pp. 1-9.
PCT International Search Report; PCT/US2006/007539; dated Jul. 17, 2006; pp. 1-9
PCT International Search Report; PCT/US2006/007540; dated Jul. 17, 2006; pp. 1-9.

(56) **References Cited**

OTHER PUBLICATIONS

PCT International Search Report; PCT/US2006/007958; dated Jul. 17, 2006; pp. 1-8.
PCT International Written Opinion and Search Report, re PCT App. No. PCT/US2006/007506, dated Jul. 17, 2006.
PCT Report on Patentability of International Application No. PCT/US2008/058327, dated Jun. 30, 2009, in 12 pages.
Schmitt, Joseph M.; Simple Photon Diffusion Analysis of the Effects of Multiple Scattering on Pulse Oximetry; Mar. 14, 1991; revised Aug. 30, 1991.
Schmitt, Joseph M.; Zhou, Guan-Xiong; Miller, Justin, Measurement of Blood Hematocrit by Dual-wavelength Near-IR Photoplethysmography, published May 1992, Proc. SPIE vol. 1641, p. 150-161, Physiological Monitoring and Early Detection Diagnostic Methods, Thomas S. Mang; Ed. (SPIE homepage), in 12 pages.
Schnapp, et al., L.M.; Pulse Oximetry. Uses and Abuses.; Chest 1990; 98; 1244-125000110.1378/Chest.98.5.1244.
Subramanian, S., et al. "Design for Constraint Violation Detection in Safety-Critical Systems," IEEE, Nov. 1998: pp. 1-8.
Extended European Search Report received in European Application No. 19203300.9, dated Apr. 2, 2020.

* cited by examiner

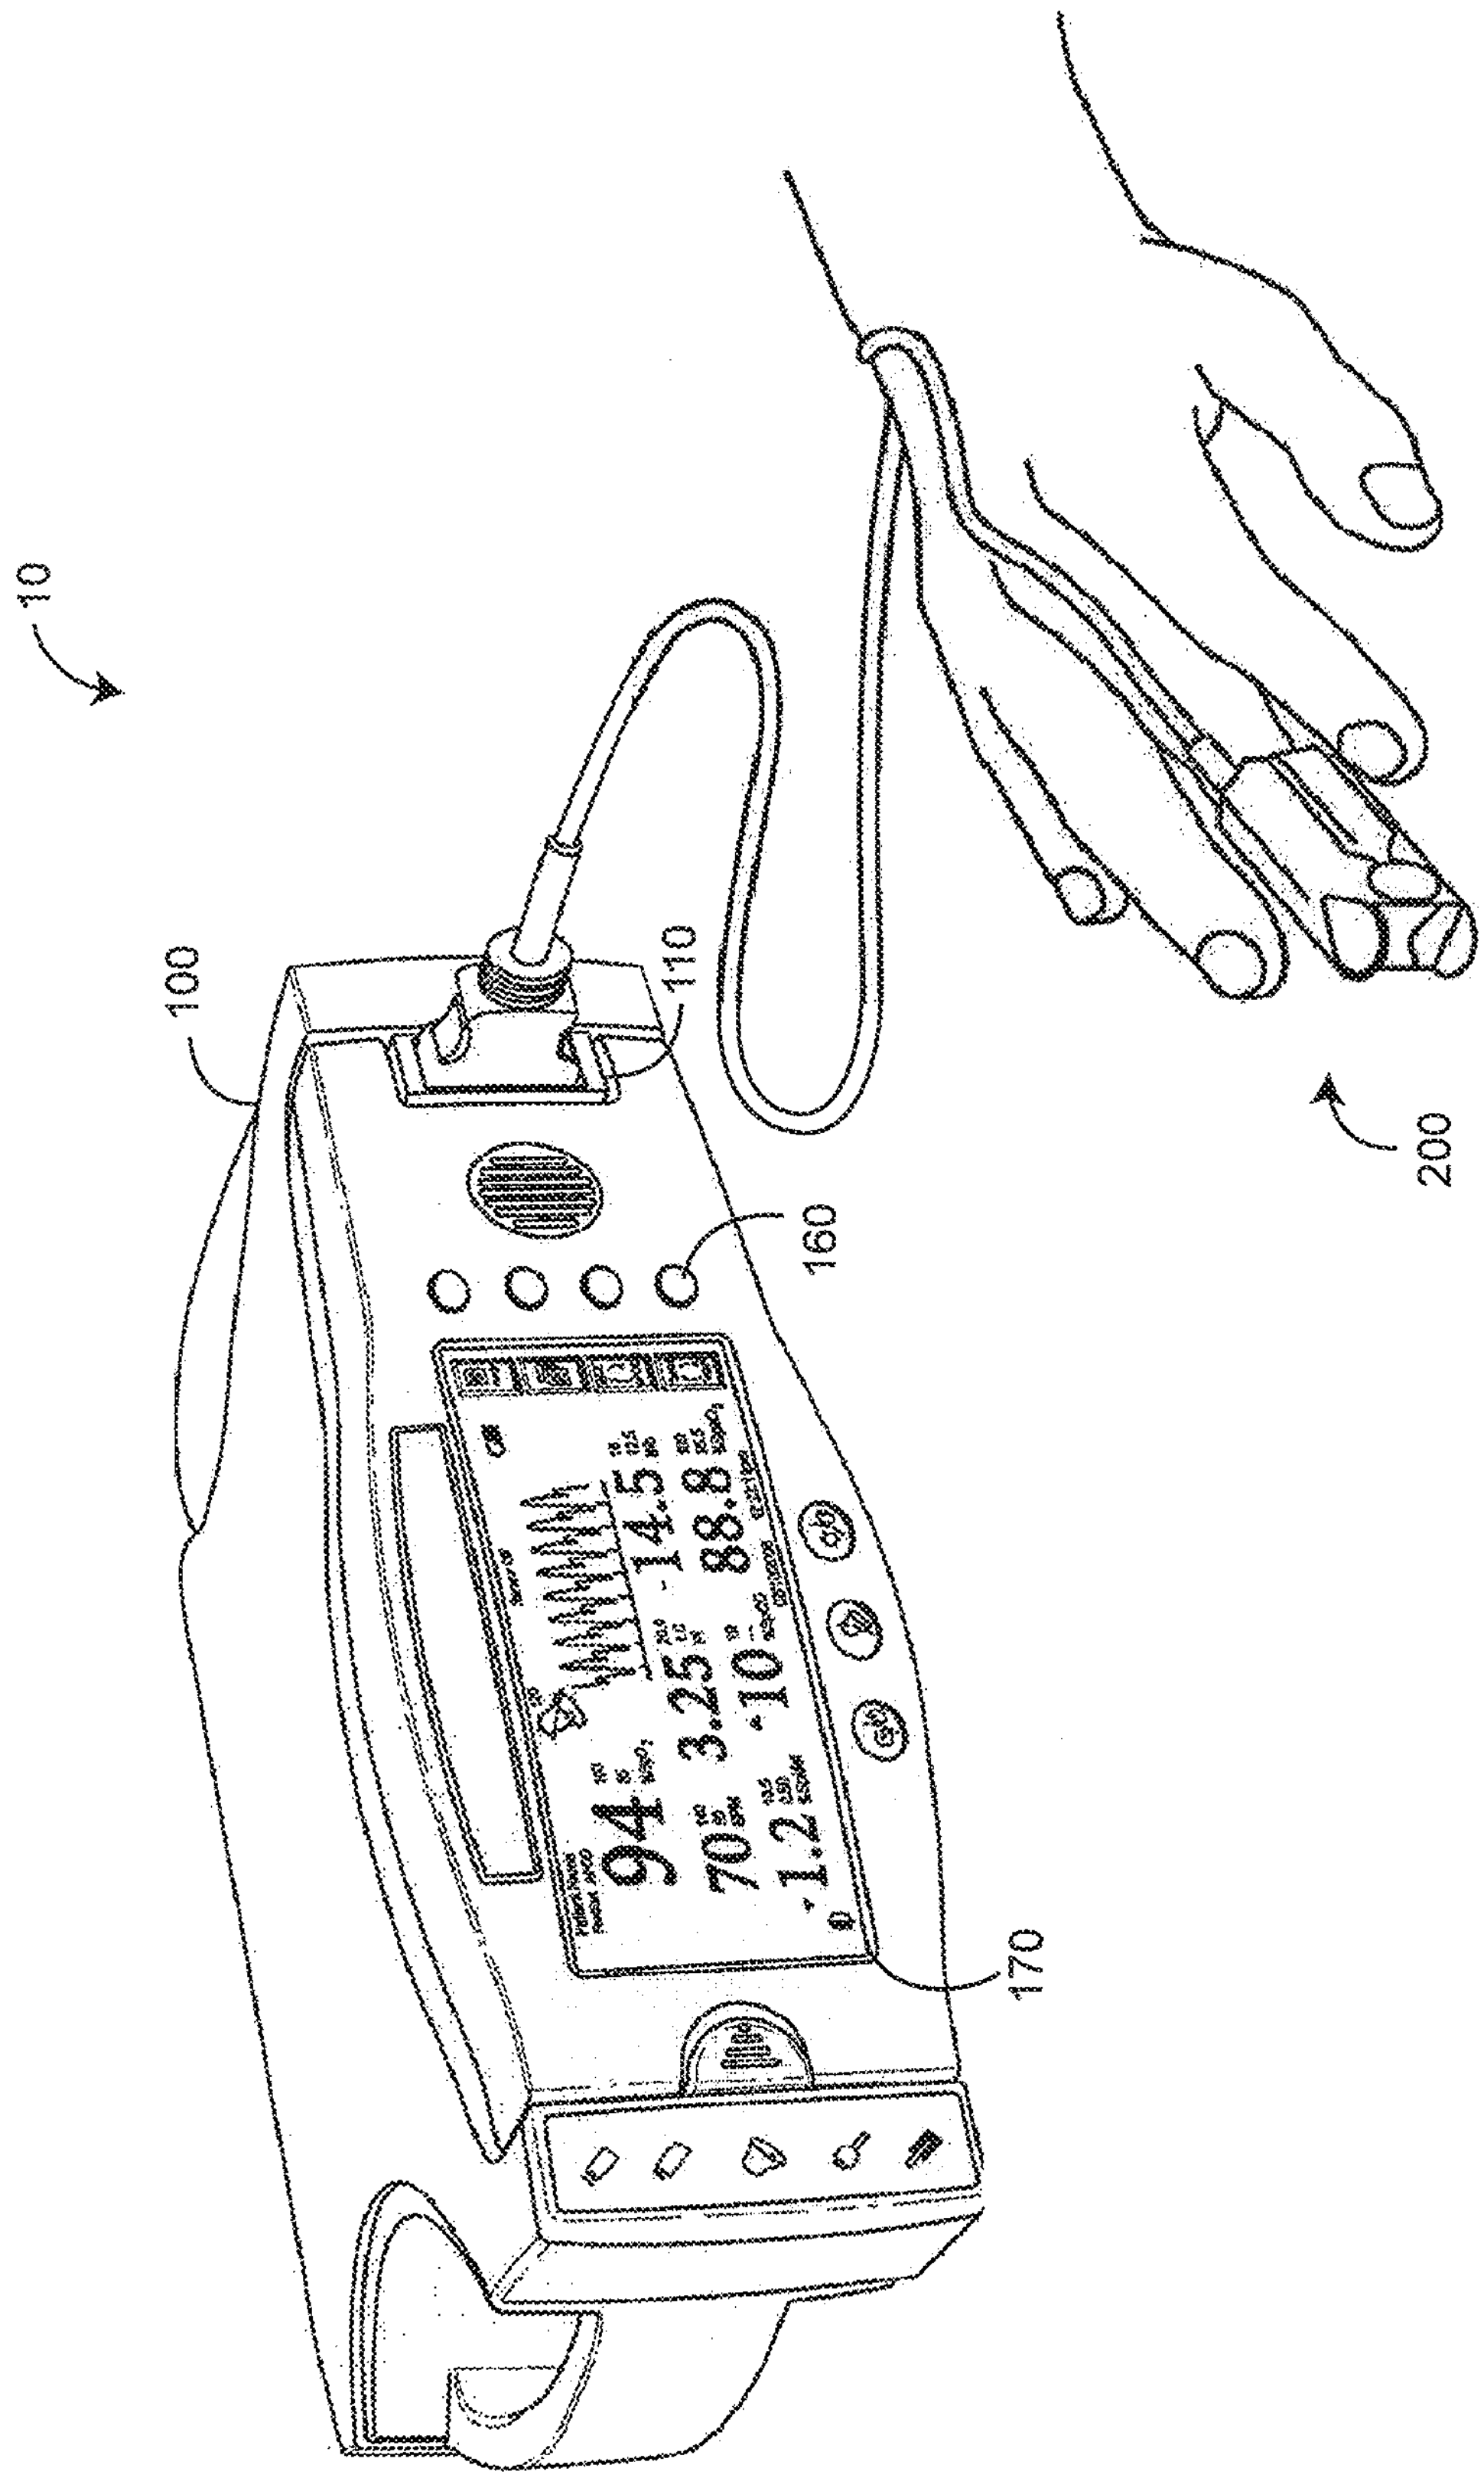

FIG. 1

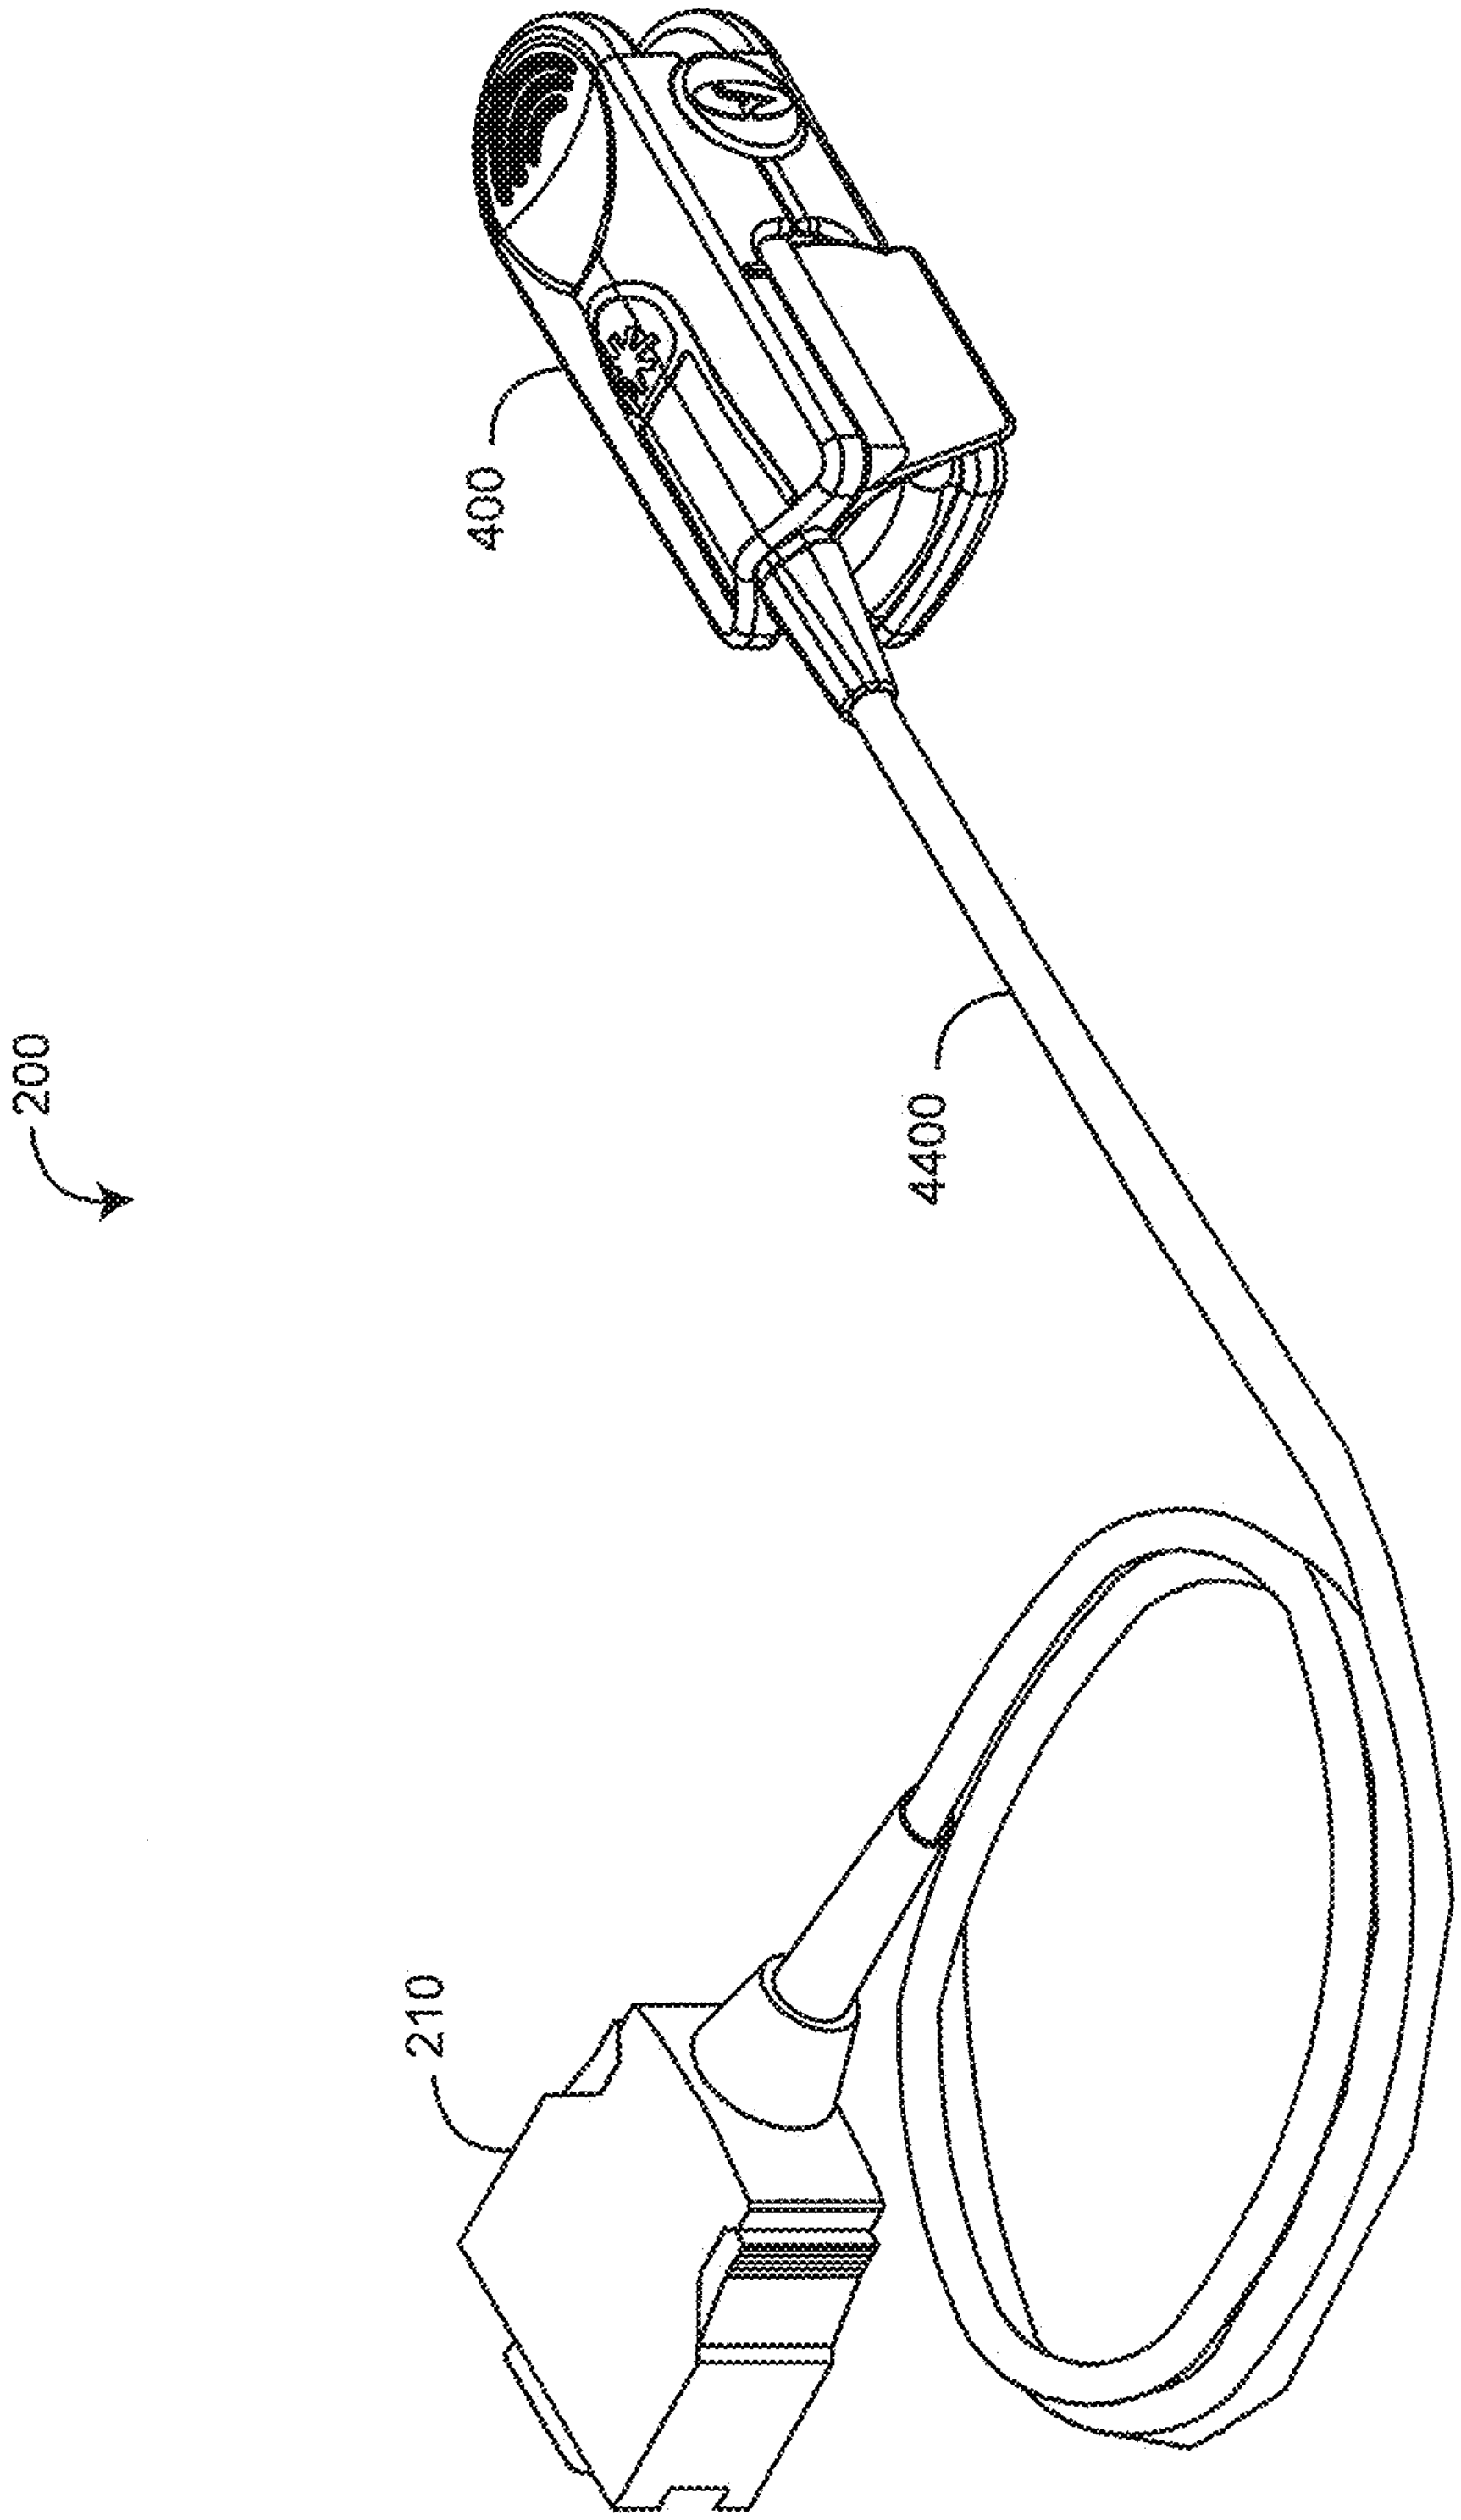

FIG. 2A

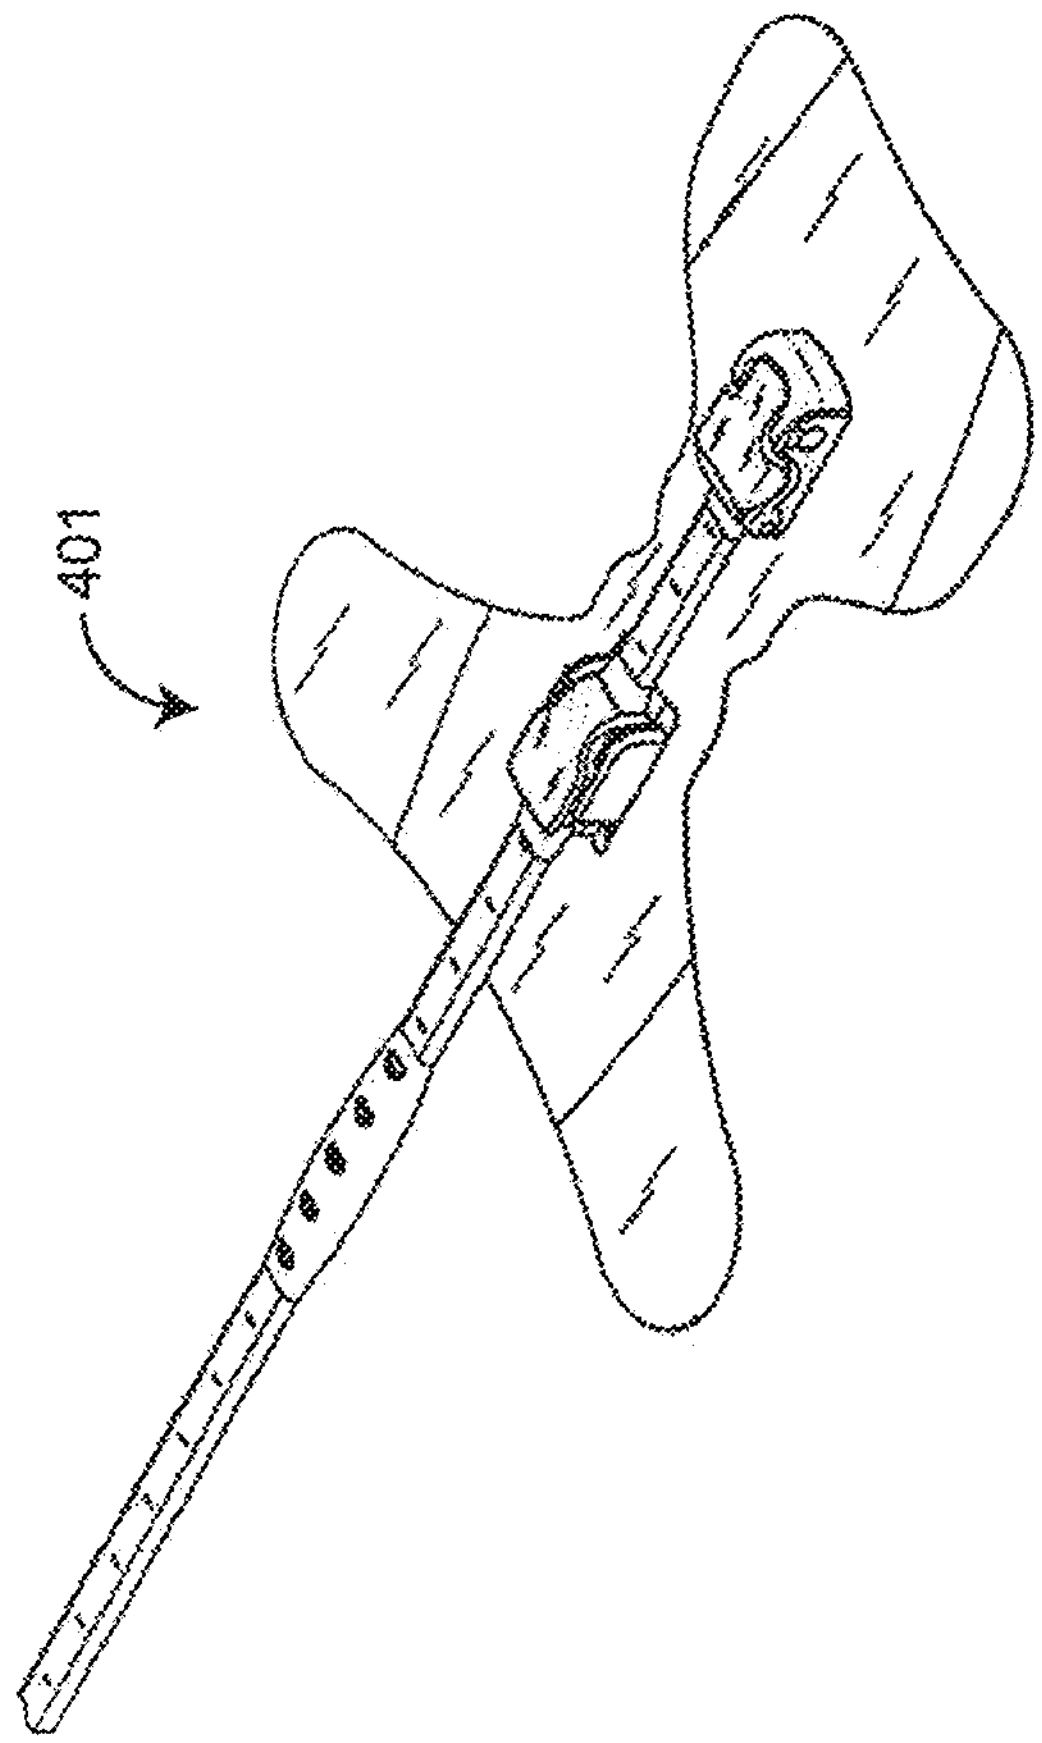

FIG. 2B

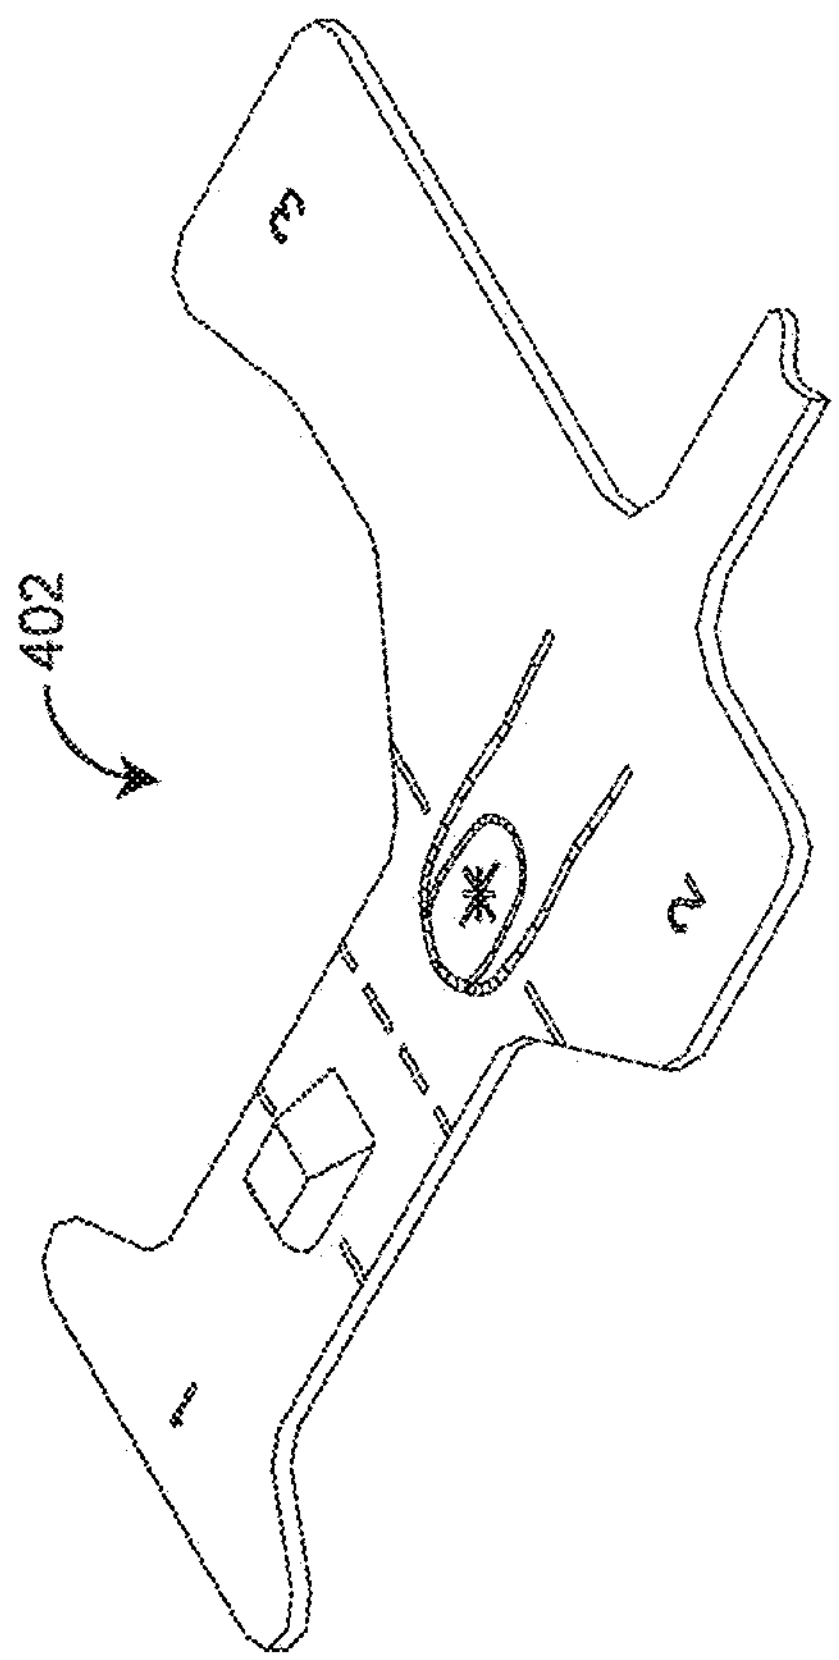

FIG. 2C

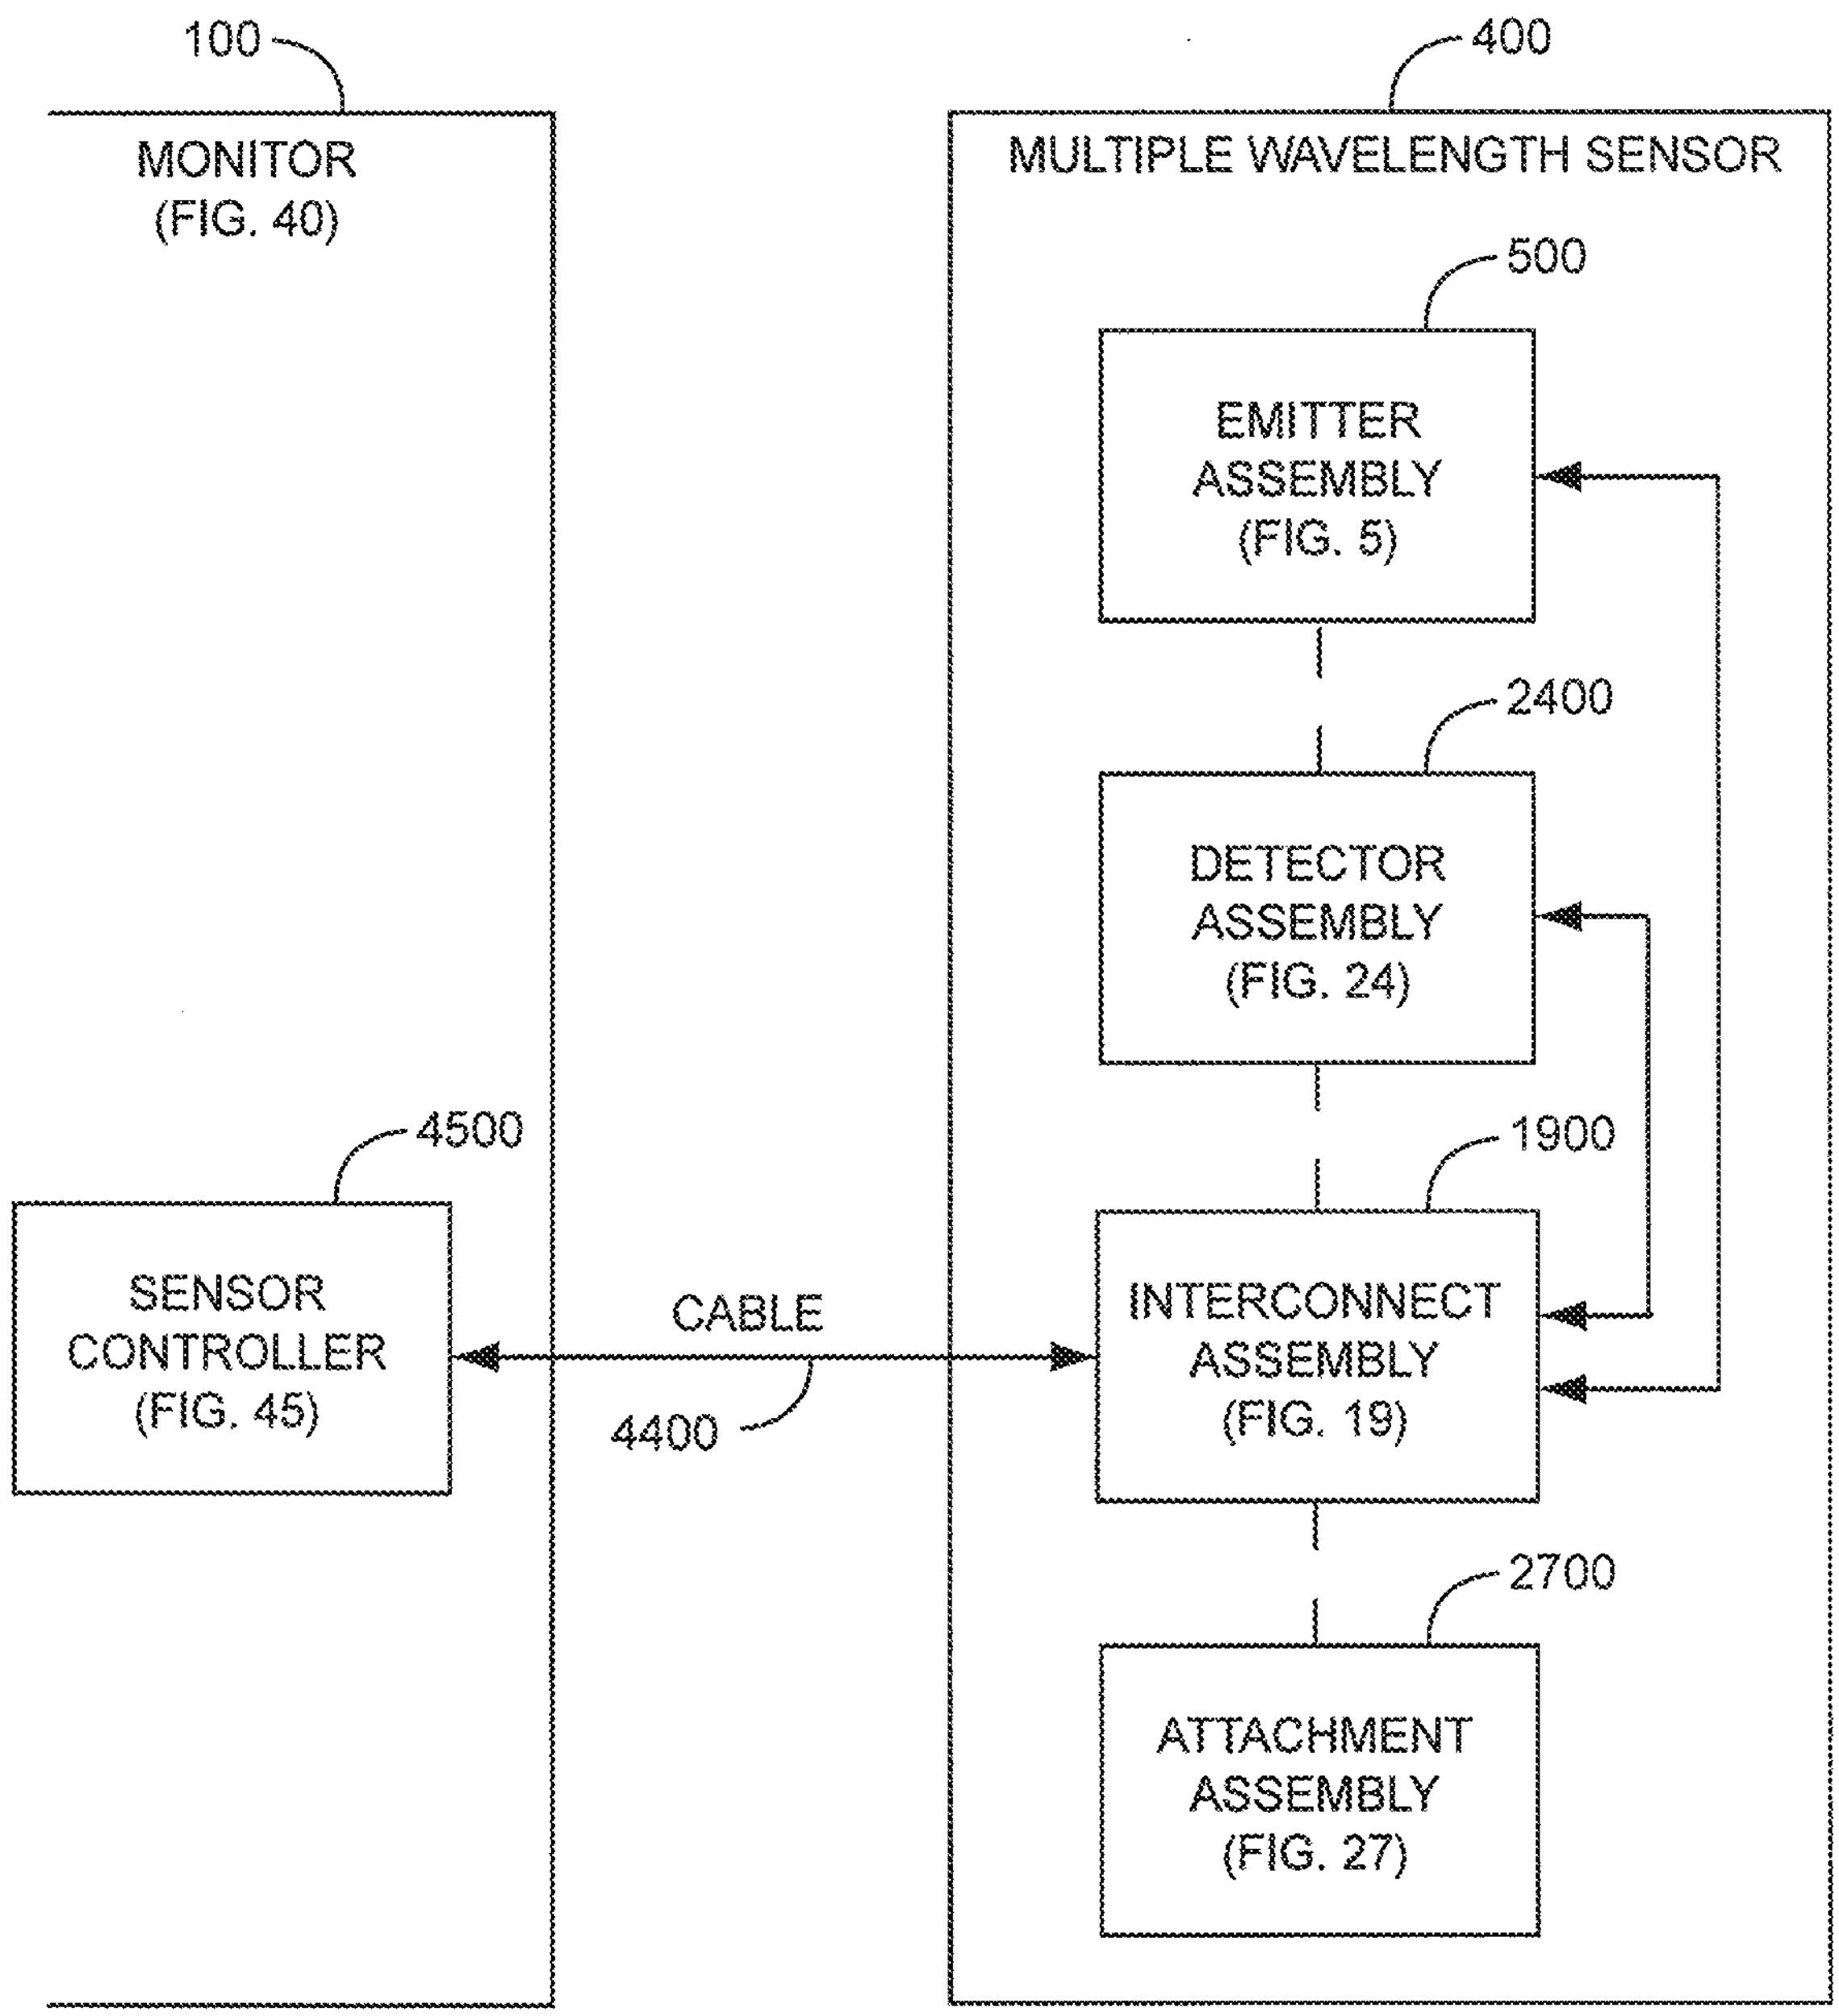

100
MONITOR
(FIG. 40)
400
MULTIPLE WAVELENGTH SENSOR
500
EMITTER
ASSEMBLY
(FIG. 5)
2400
DETECTOR
ASSEMBLY
(FIG. 24)
4500
SENSOR
CONTROLLER
(FIG. 45)
CABLE
4400
1900
INTERCONNECT
ASSEMBLY
(FIG. 19)
2700
ATTACHMENT
ASSEMBLY
(FIG. 27)

FIG. 3

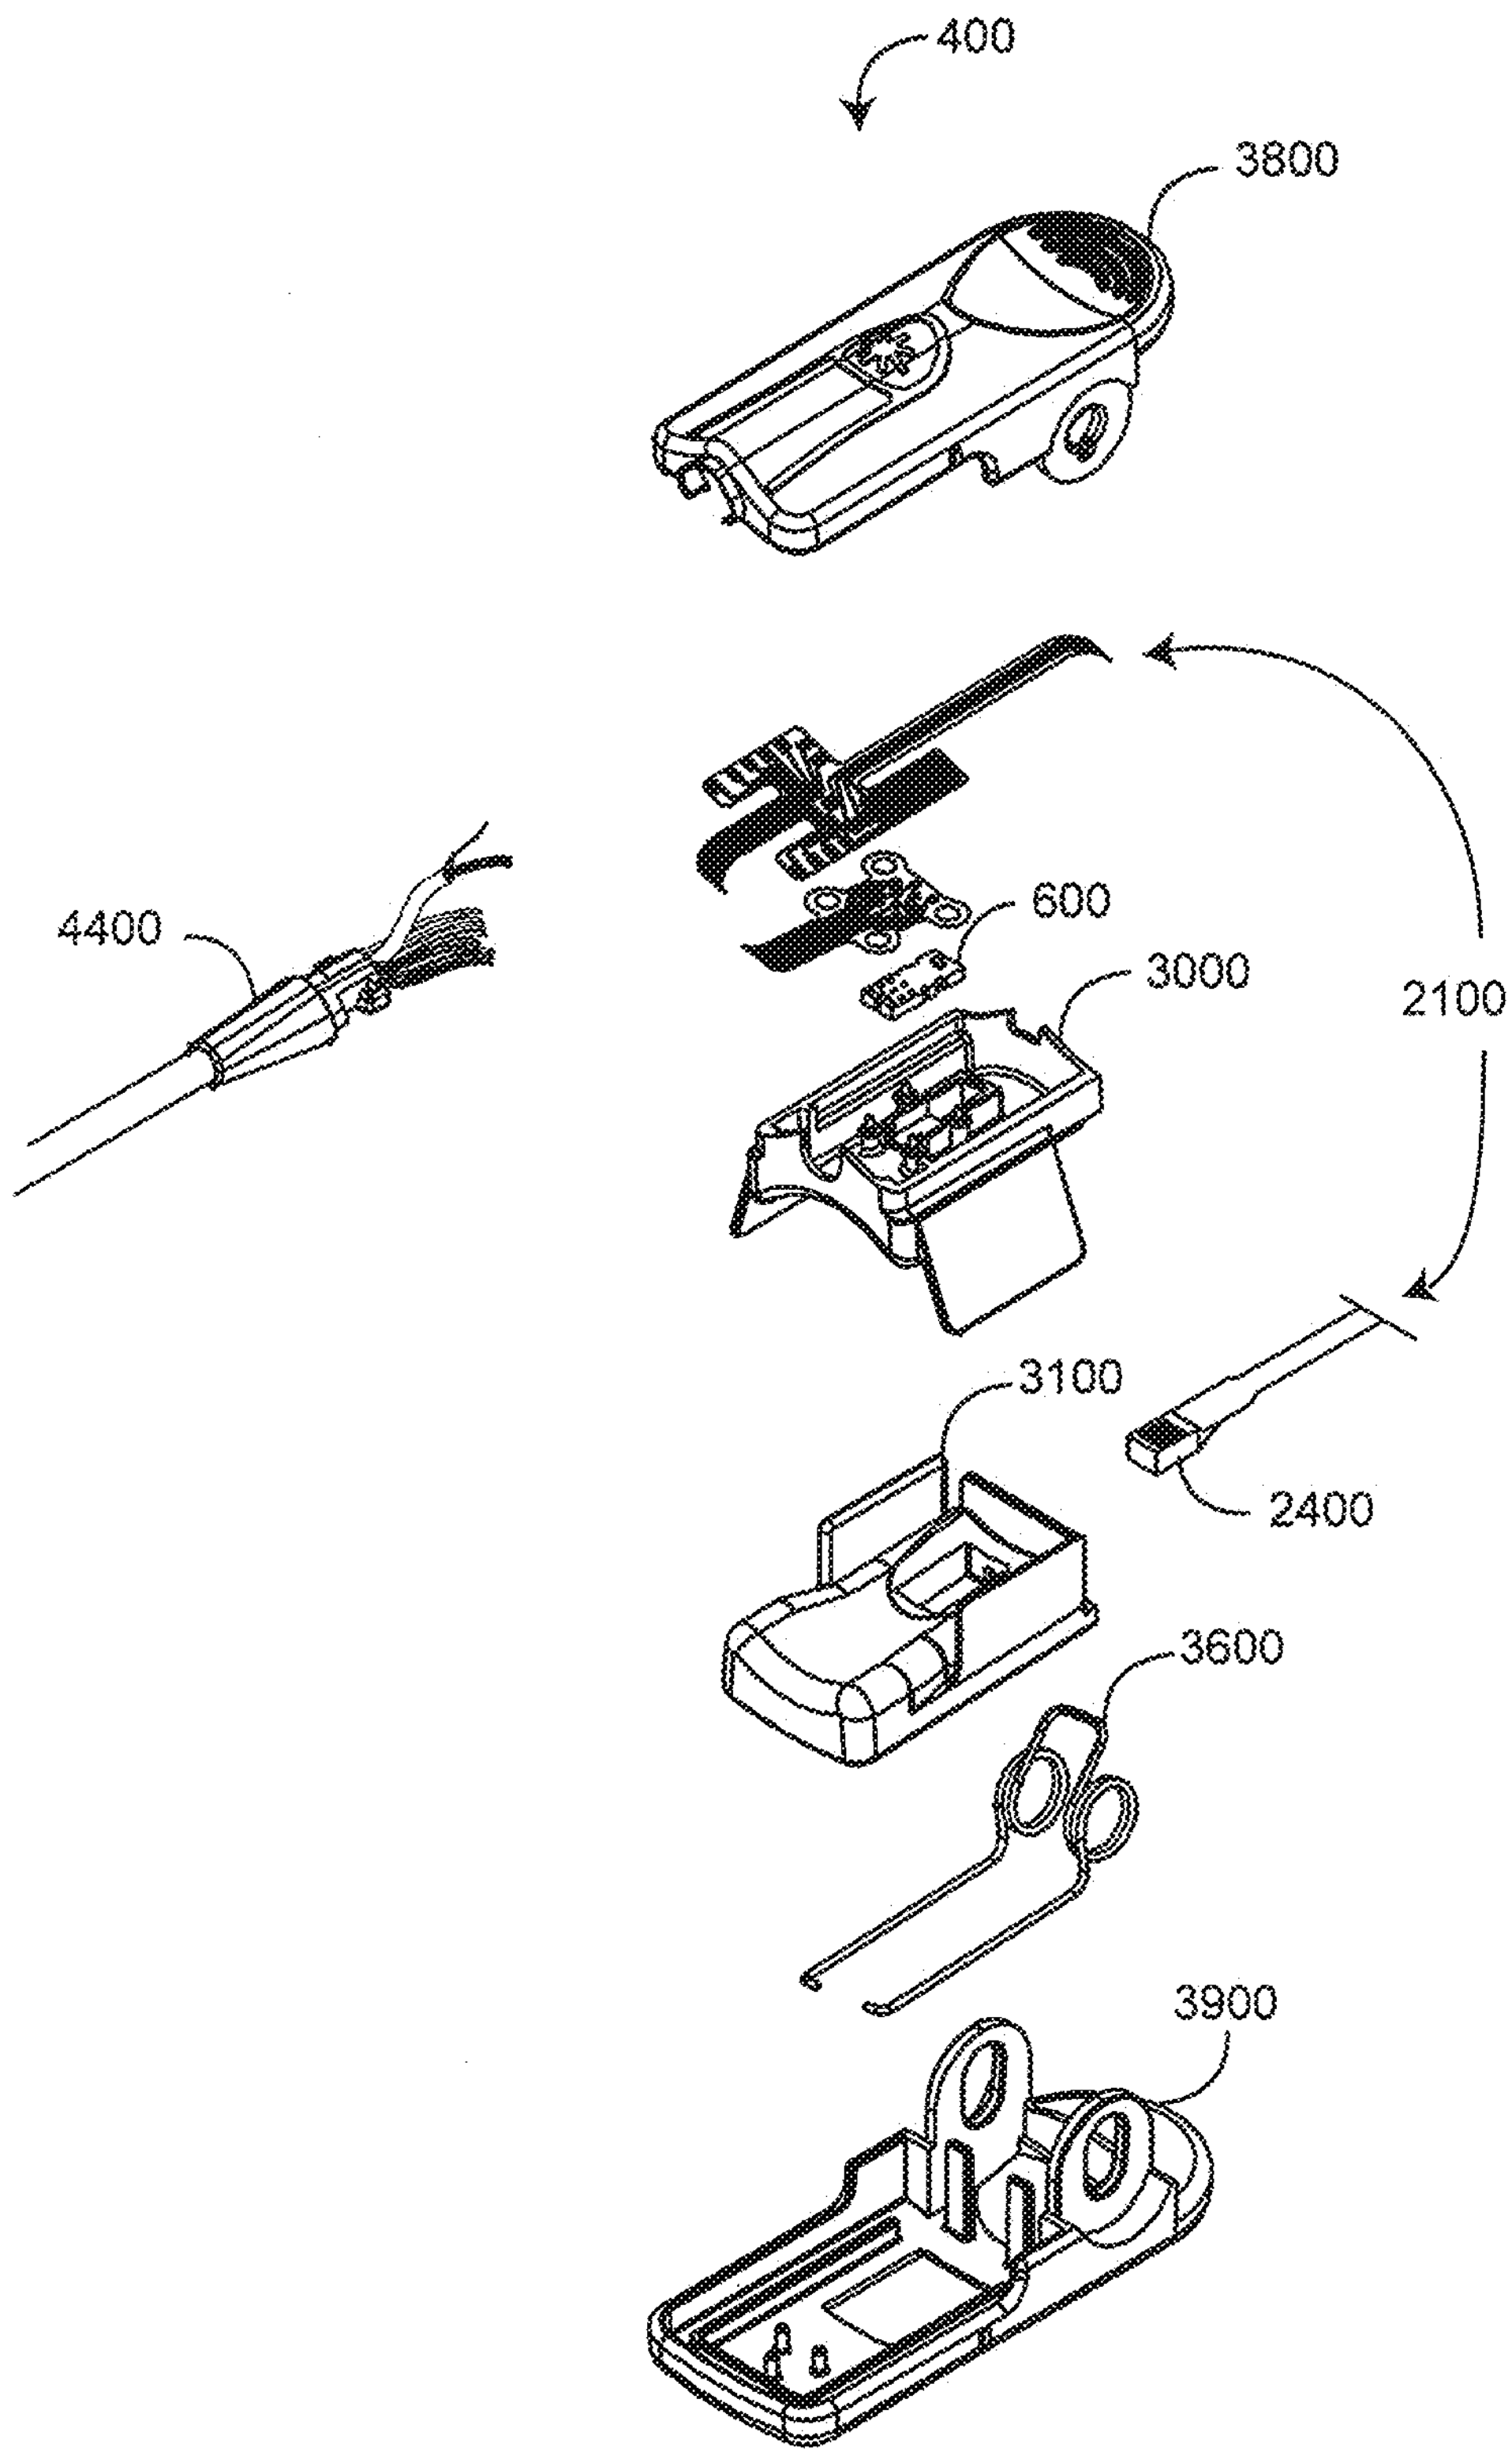

FIG. 4

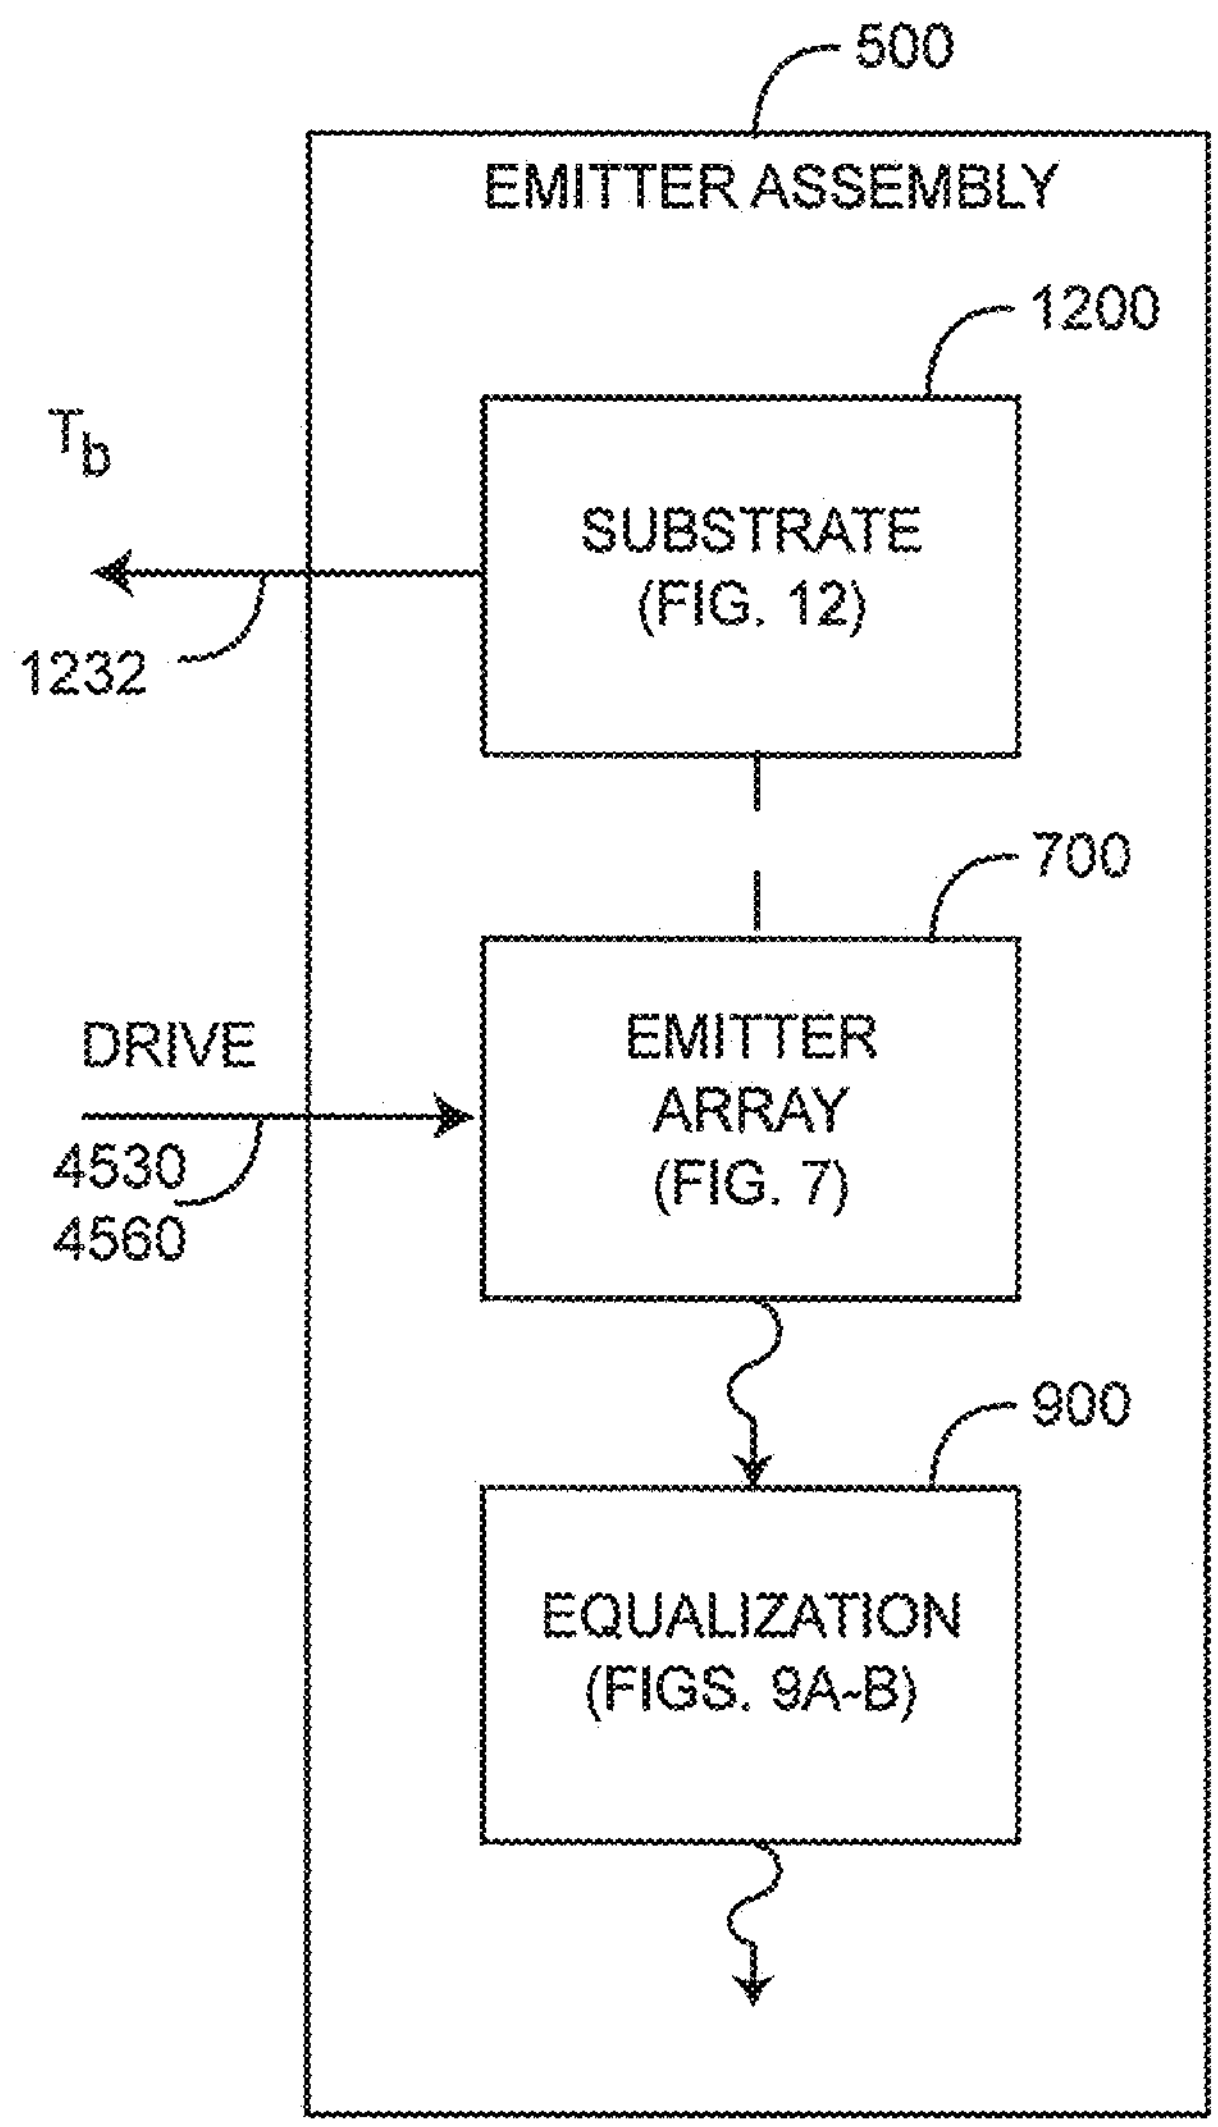
500
EMITTER ASSEMBLY
1200
T_b
SUBSTRATE
(FIG. 12)
1232
700
DRIVE
EMITTER
ARRAY
(FIG. 7)
4530
4560
900
EQUALIZATION
(FIGS. 9A-B)

FIG. 5

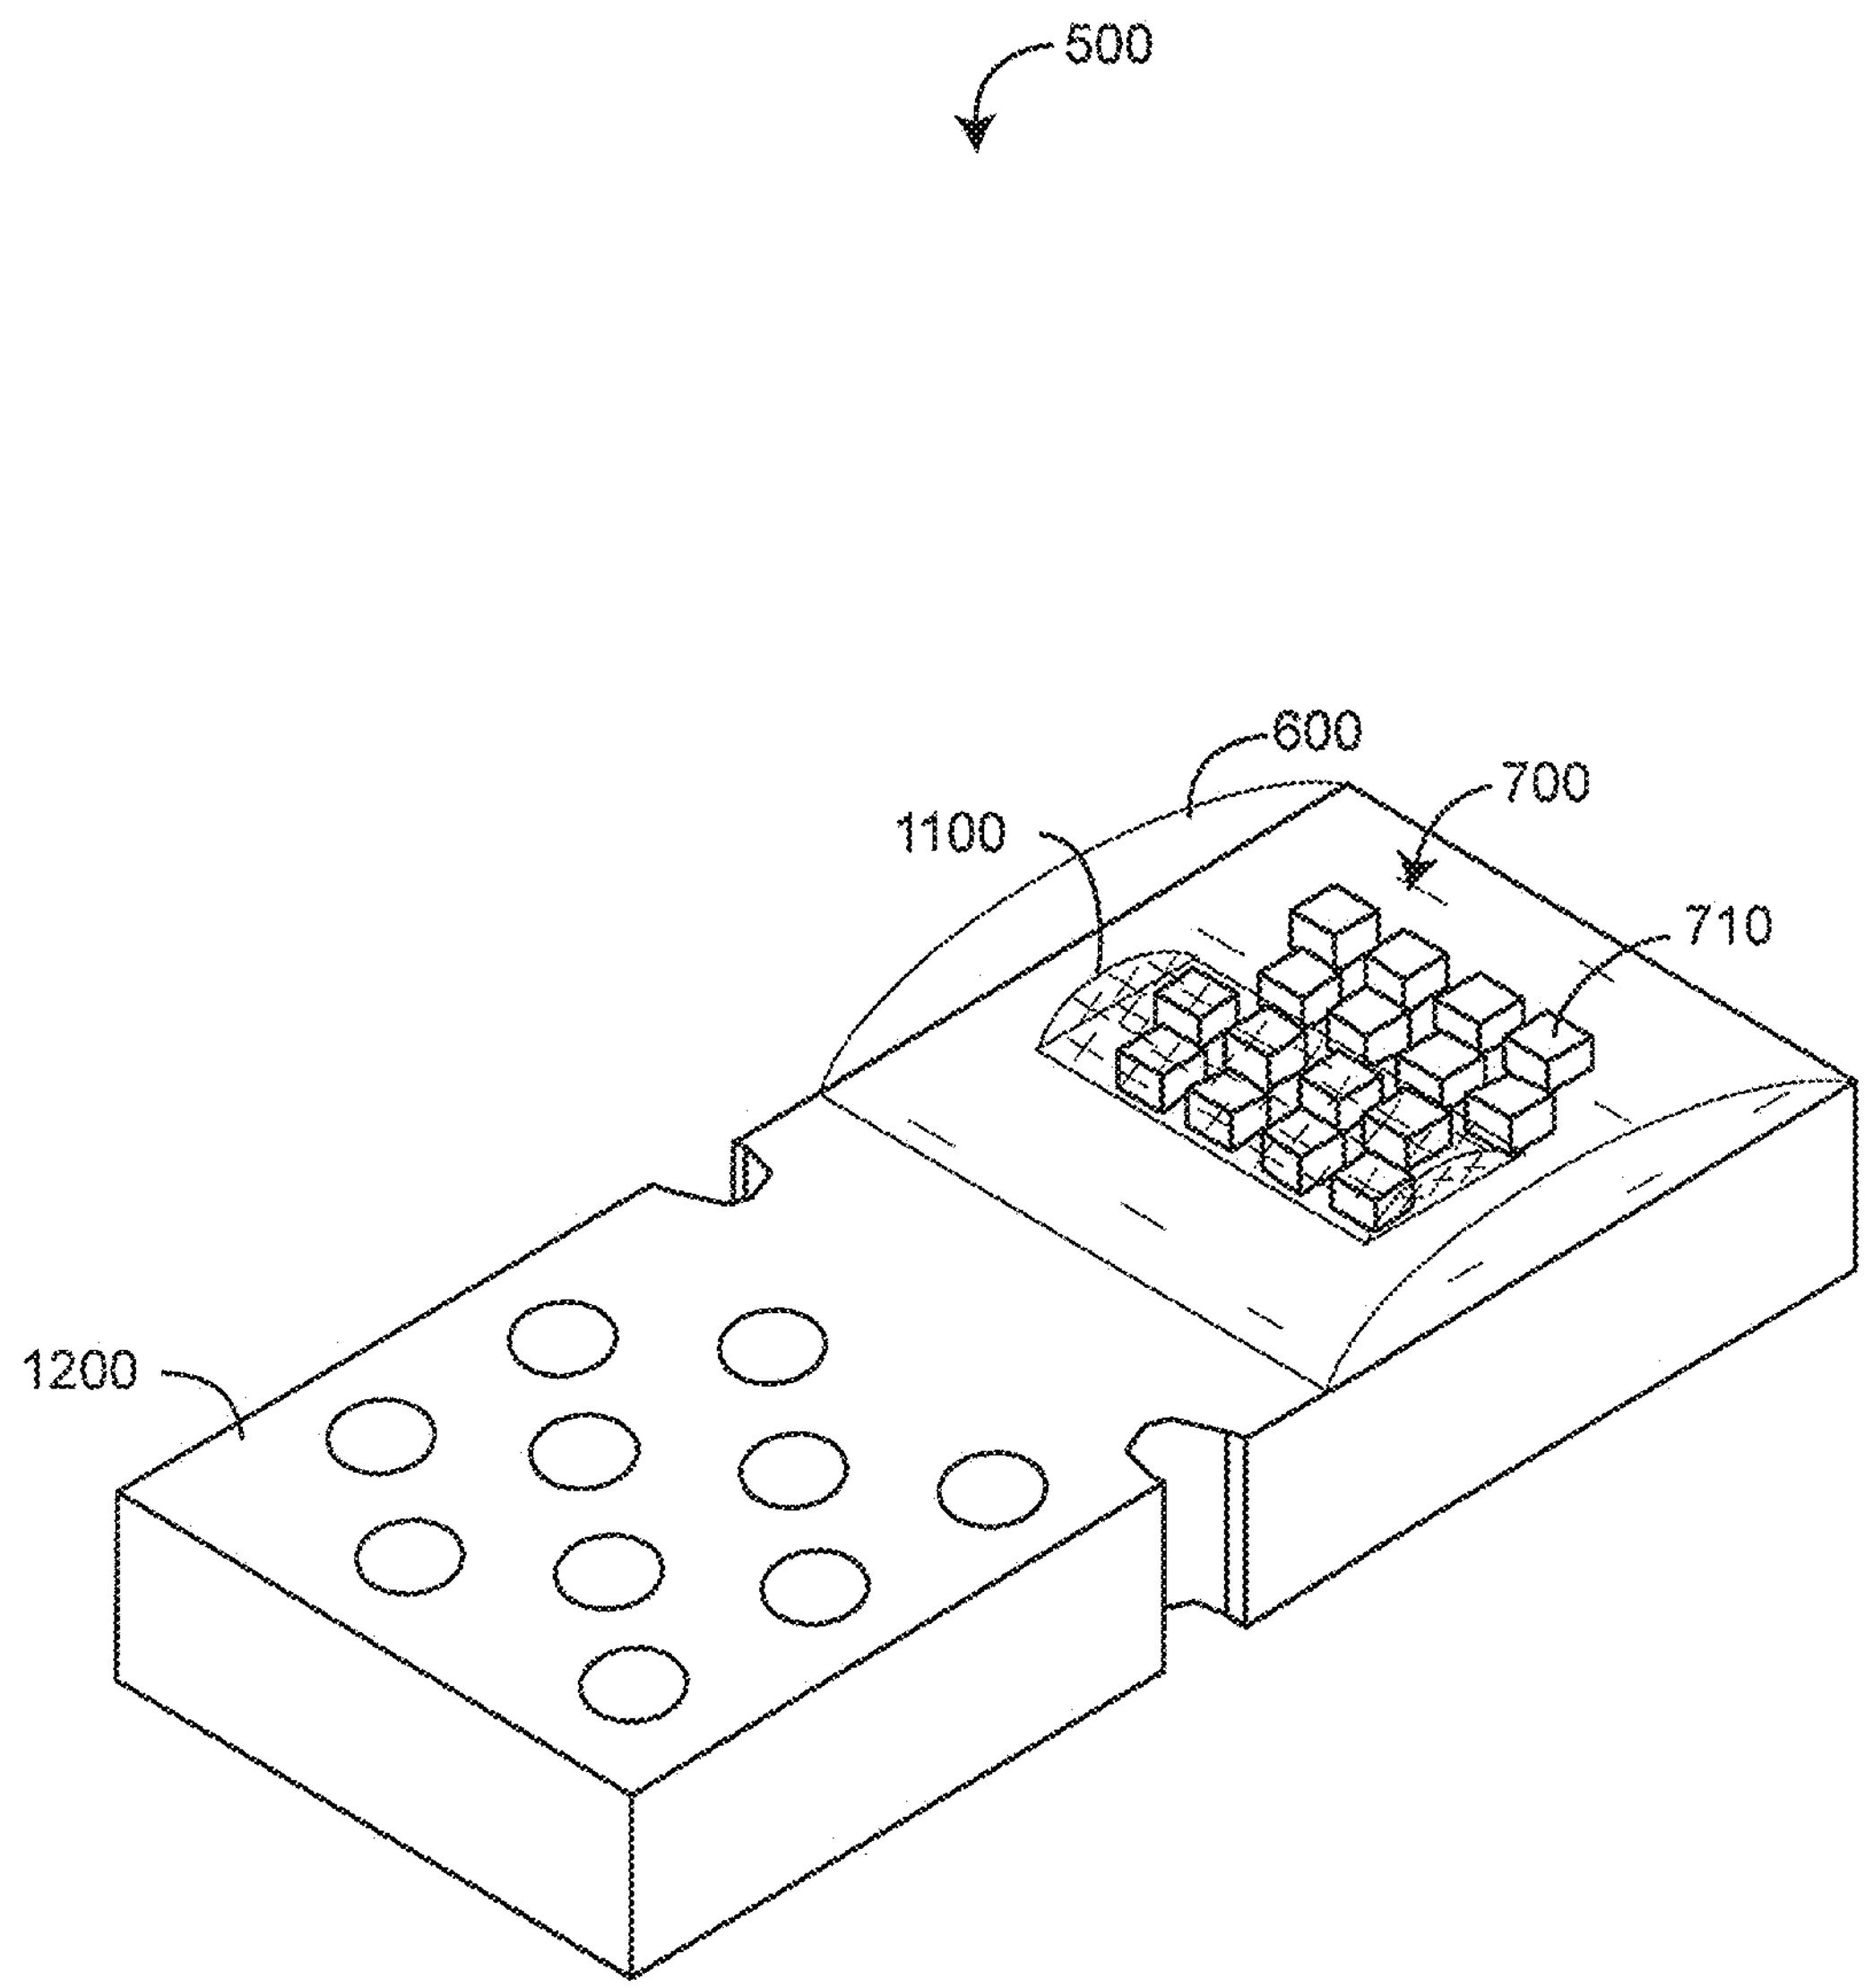

FIG. 6

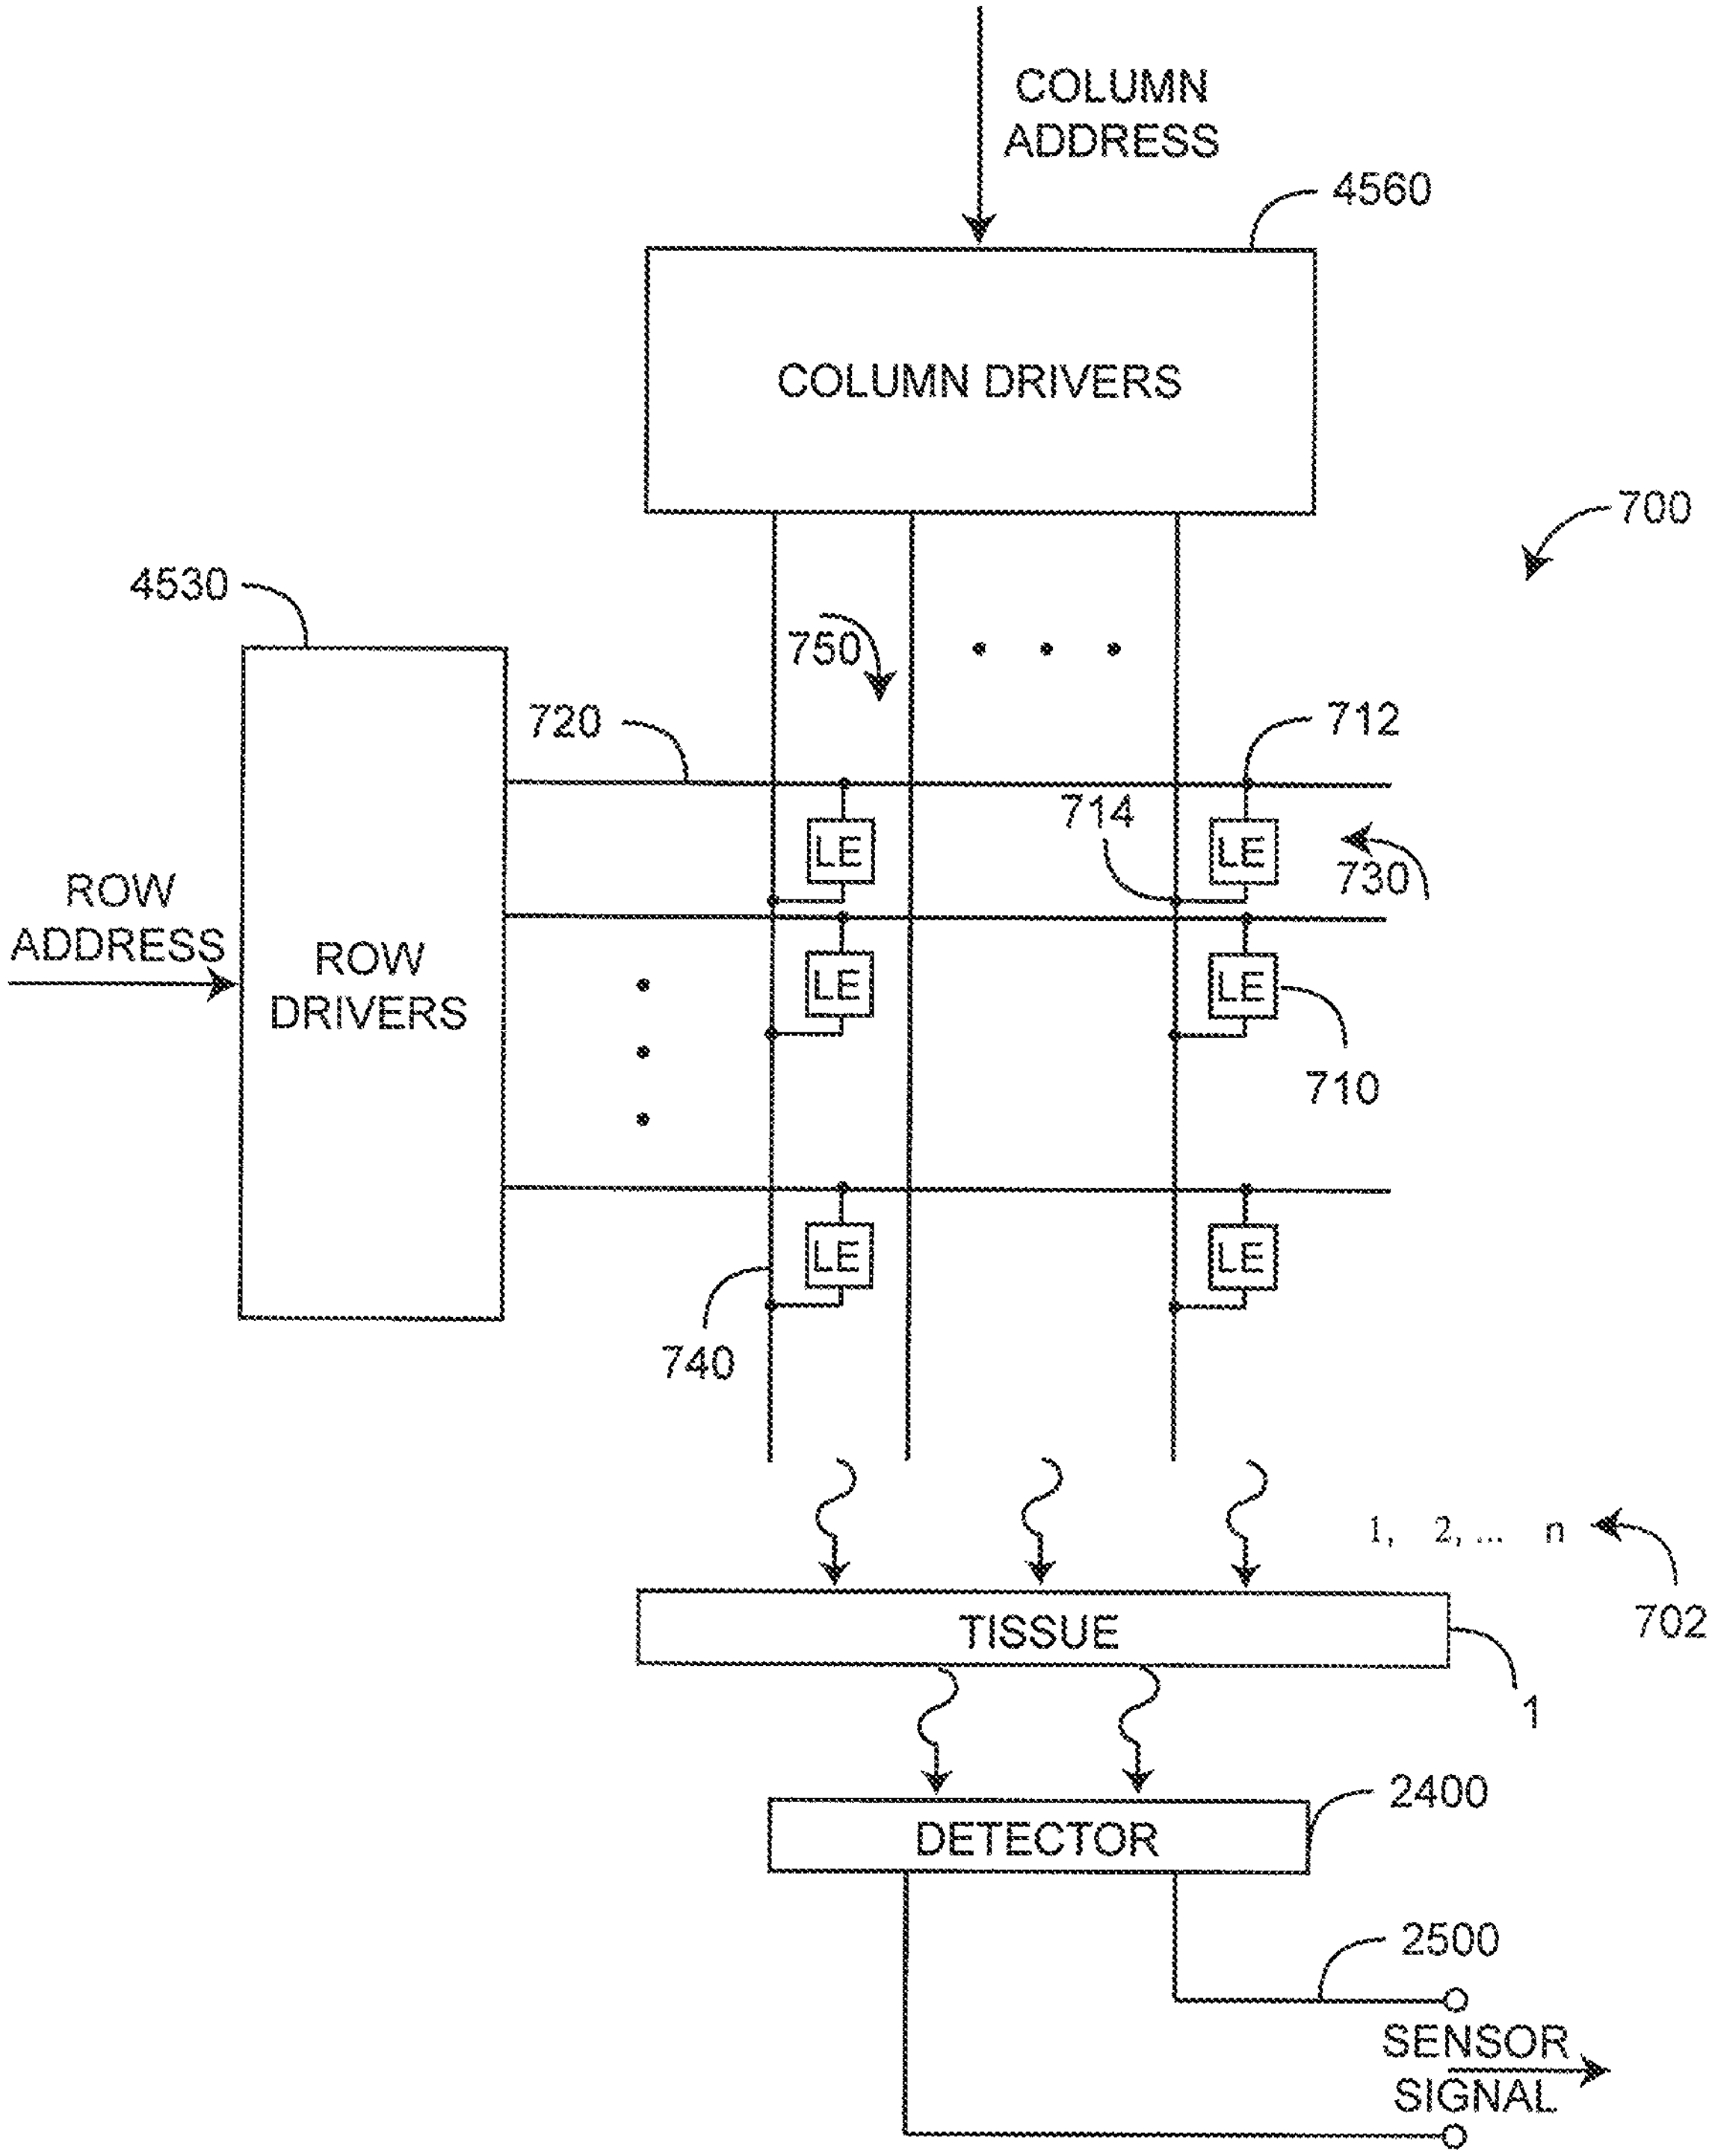
COLUMN
ADDRESS
4560
COLUMN DRIVERS
700
4530
750
720
712
ROW
ADDRESS
ROW
DRIVERS
714
LE
730
710
740
1, 2, ... n
702
TISSUE
1
2400
DETECTOR
2500
SENSOR
SIGNAL

FIG. 7

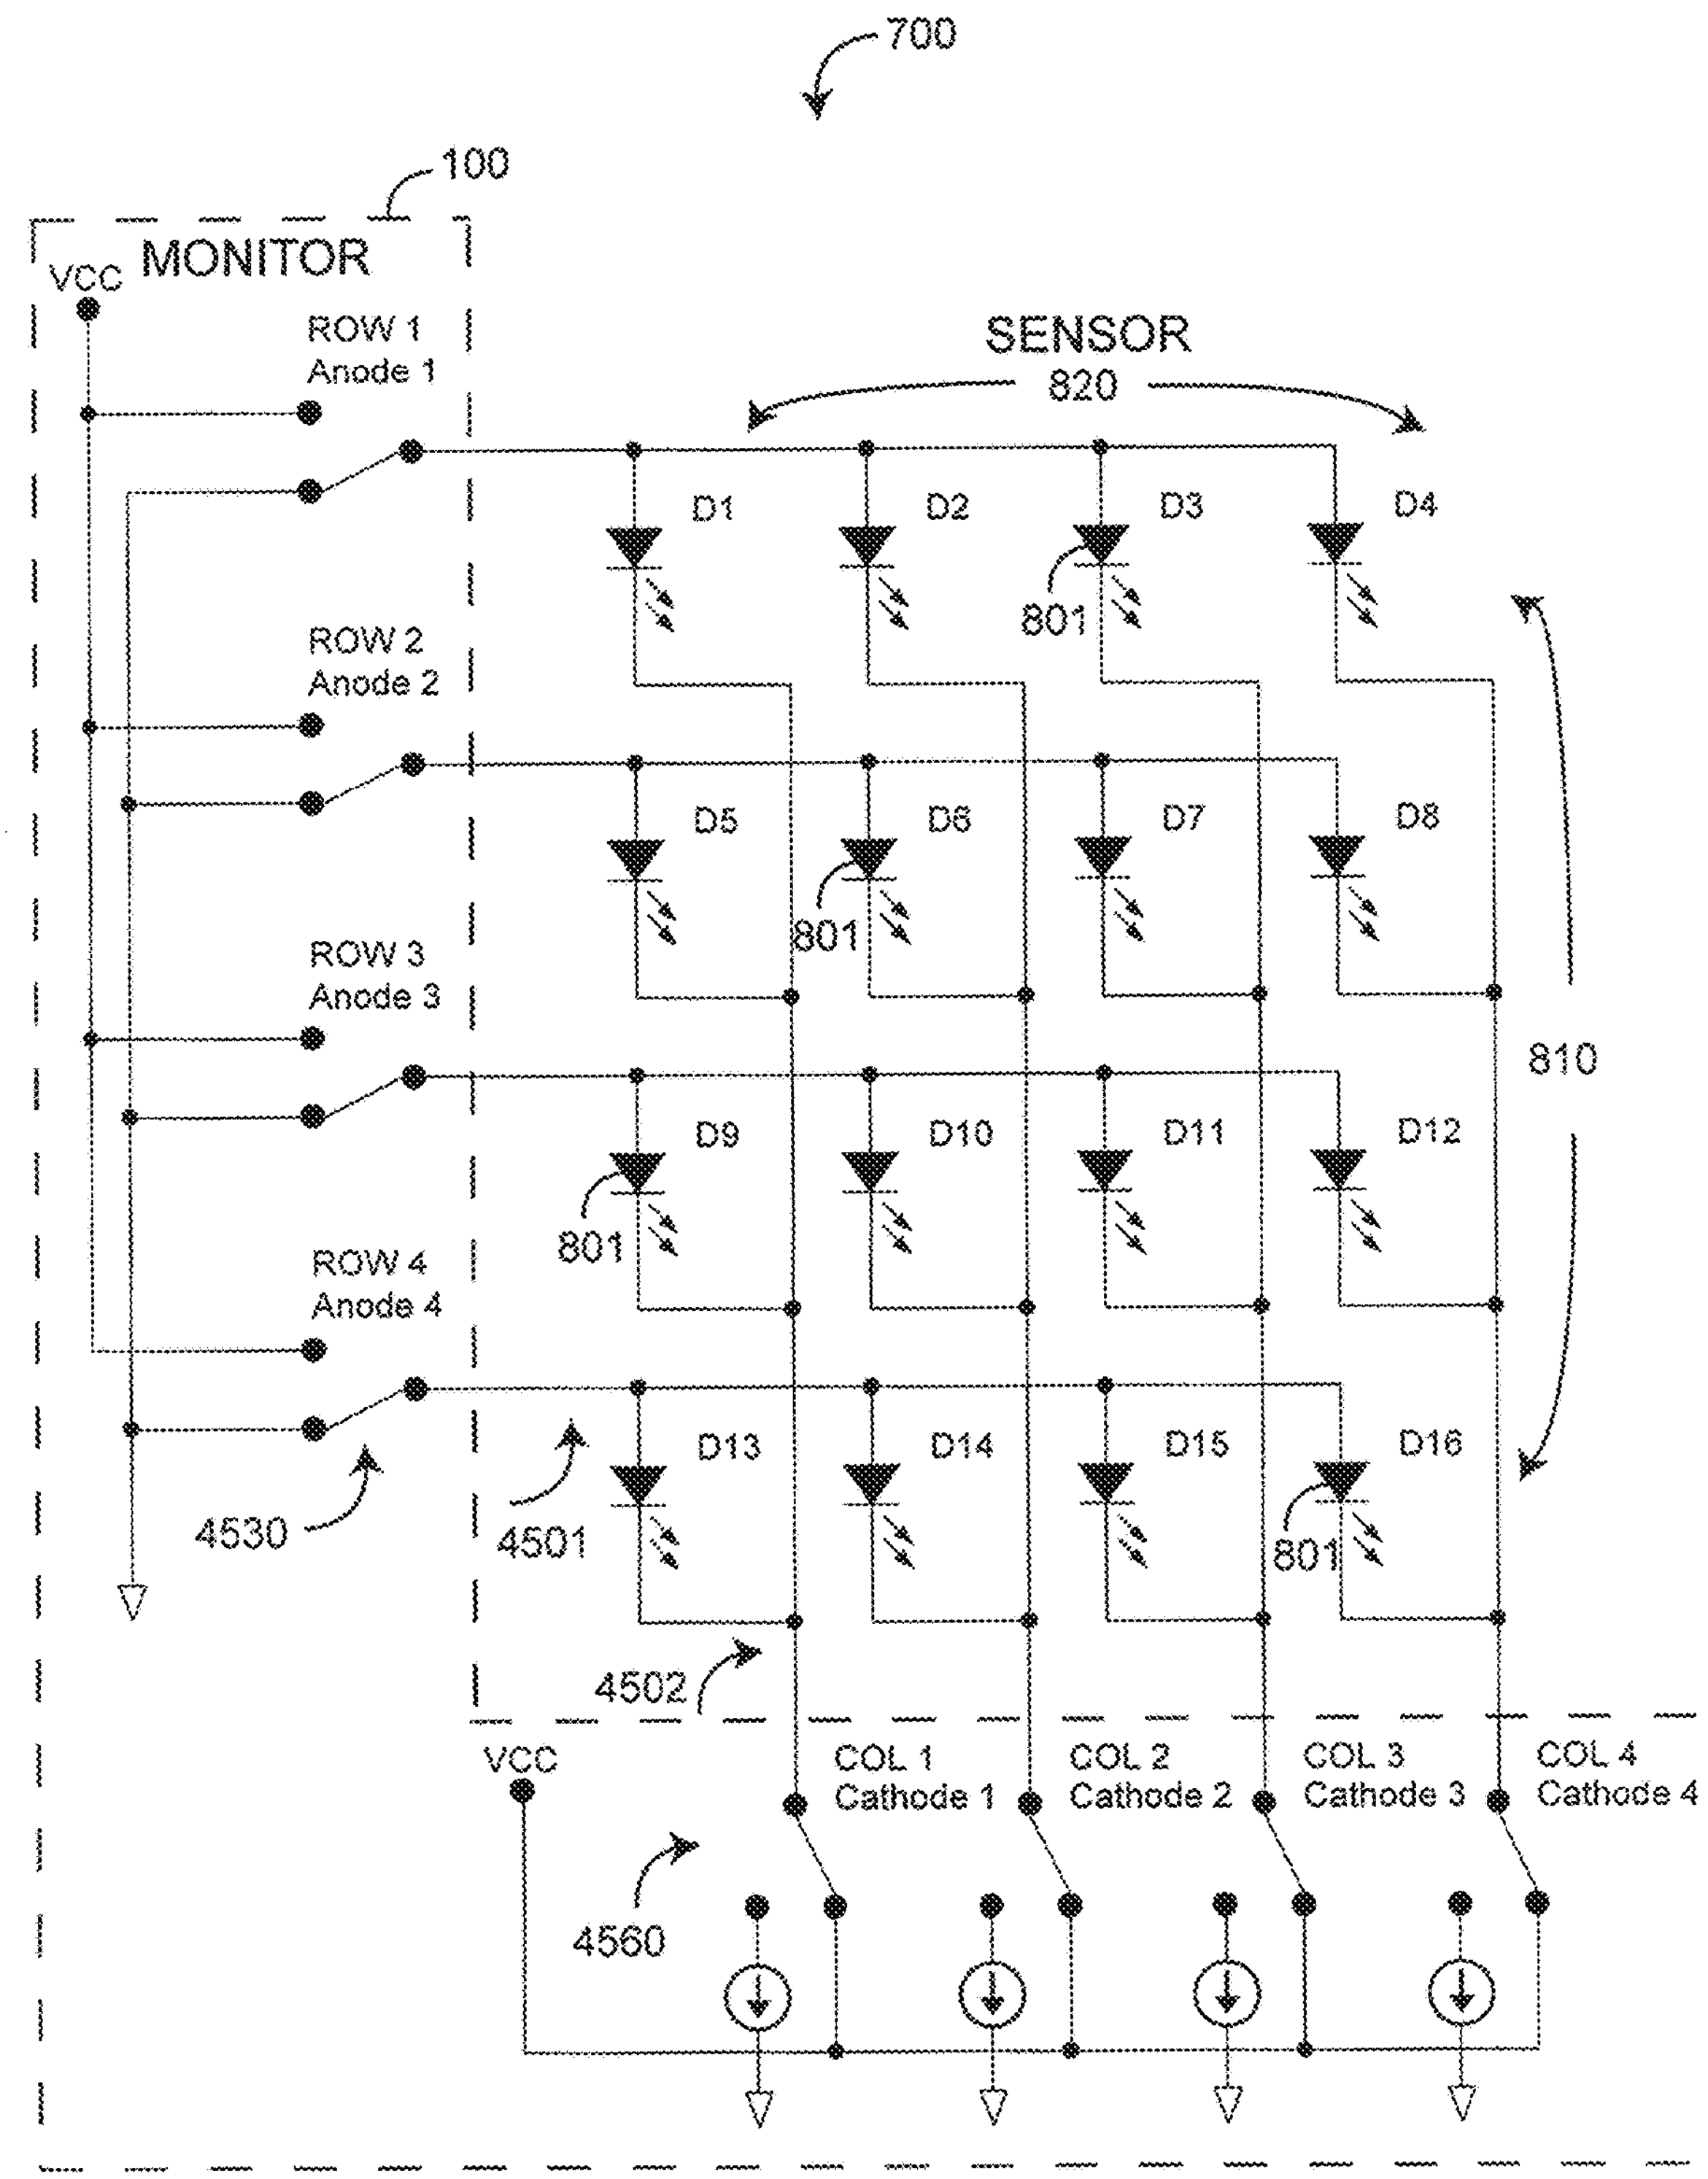

700
100
VCC
MONITOR
ROW 1
Anode 1
SENSOR
820
D1
D2
D3
D4
801
ROW 2
Anode 2
D5
D6
D7
D8
801
ROW 3
Anode 3
810
D9
D10
D11
D12
801
ROW 4
Anode 4
D13
D14
D15
D16
4530
4501
801
4502
VCC
COL 1
Cathode 1
COL 2
Cathode 2
COL 3
Cathode 3
COL 4
Cathode 4
4560

FIG. 8

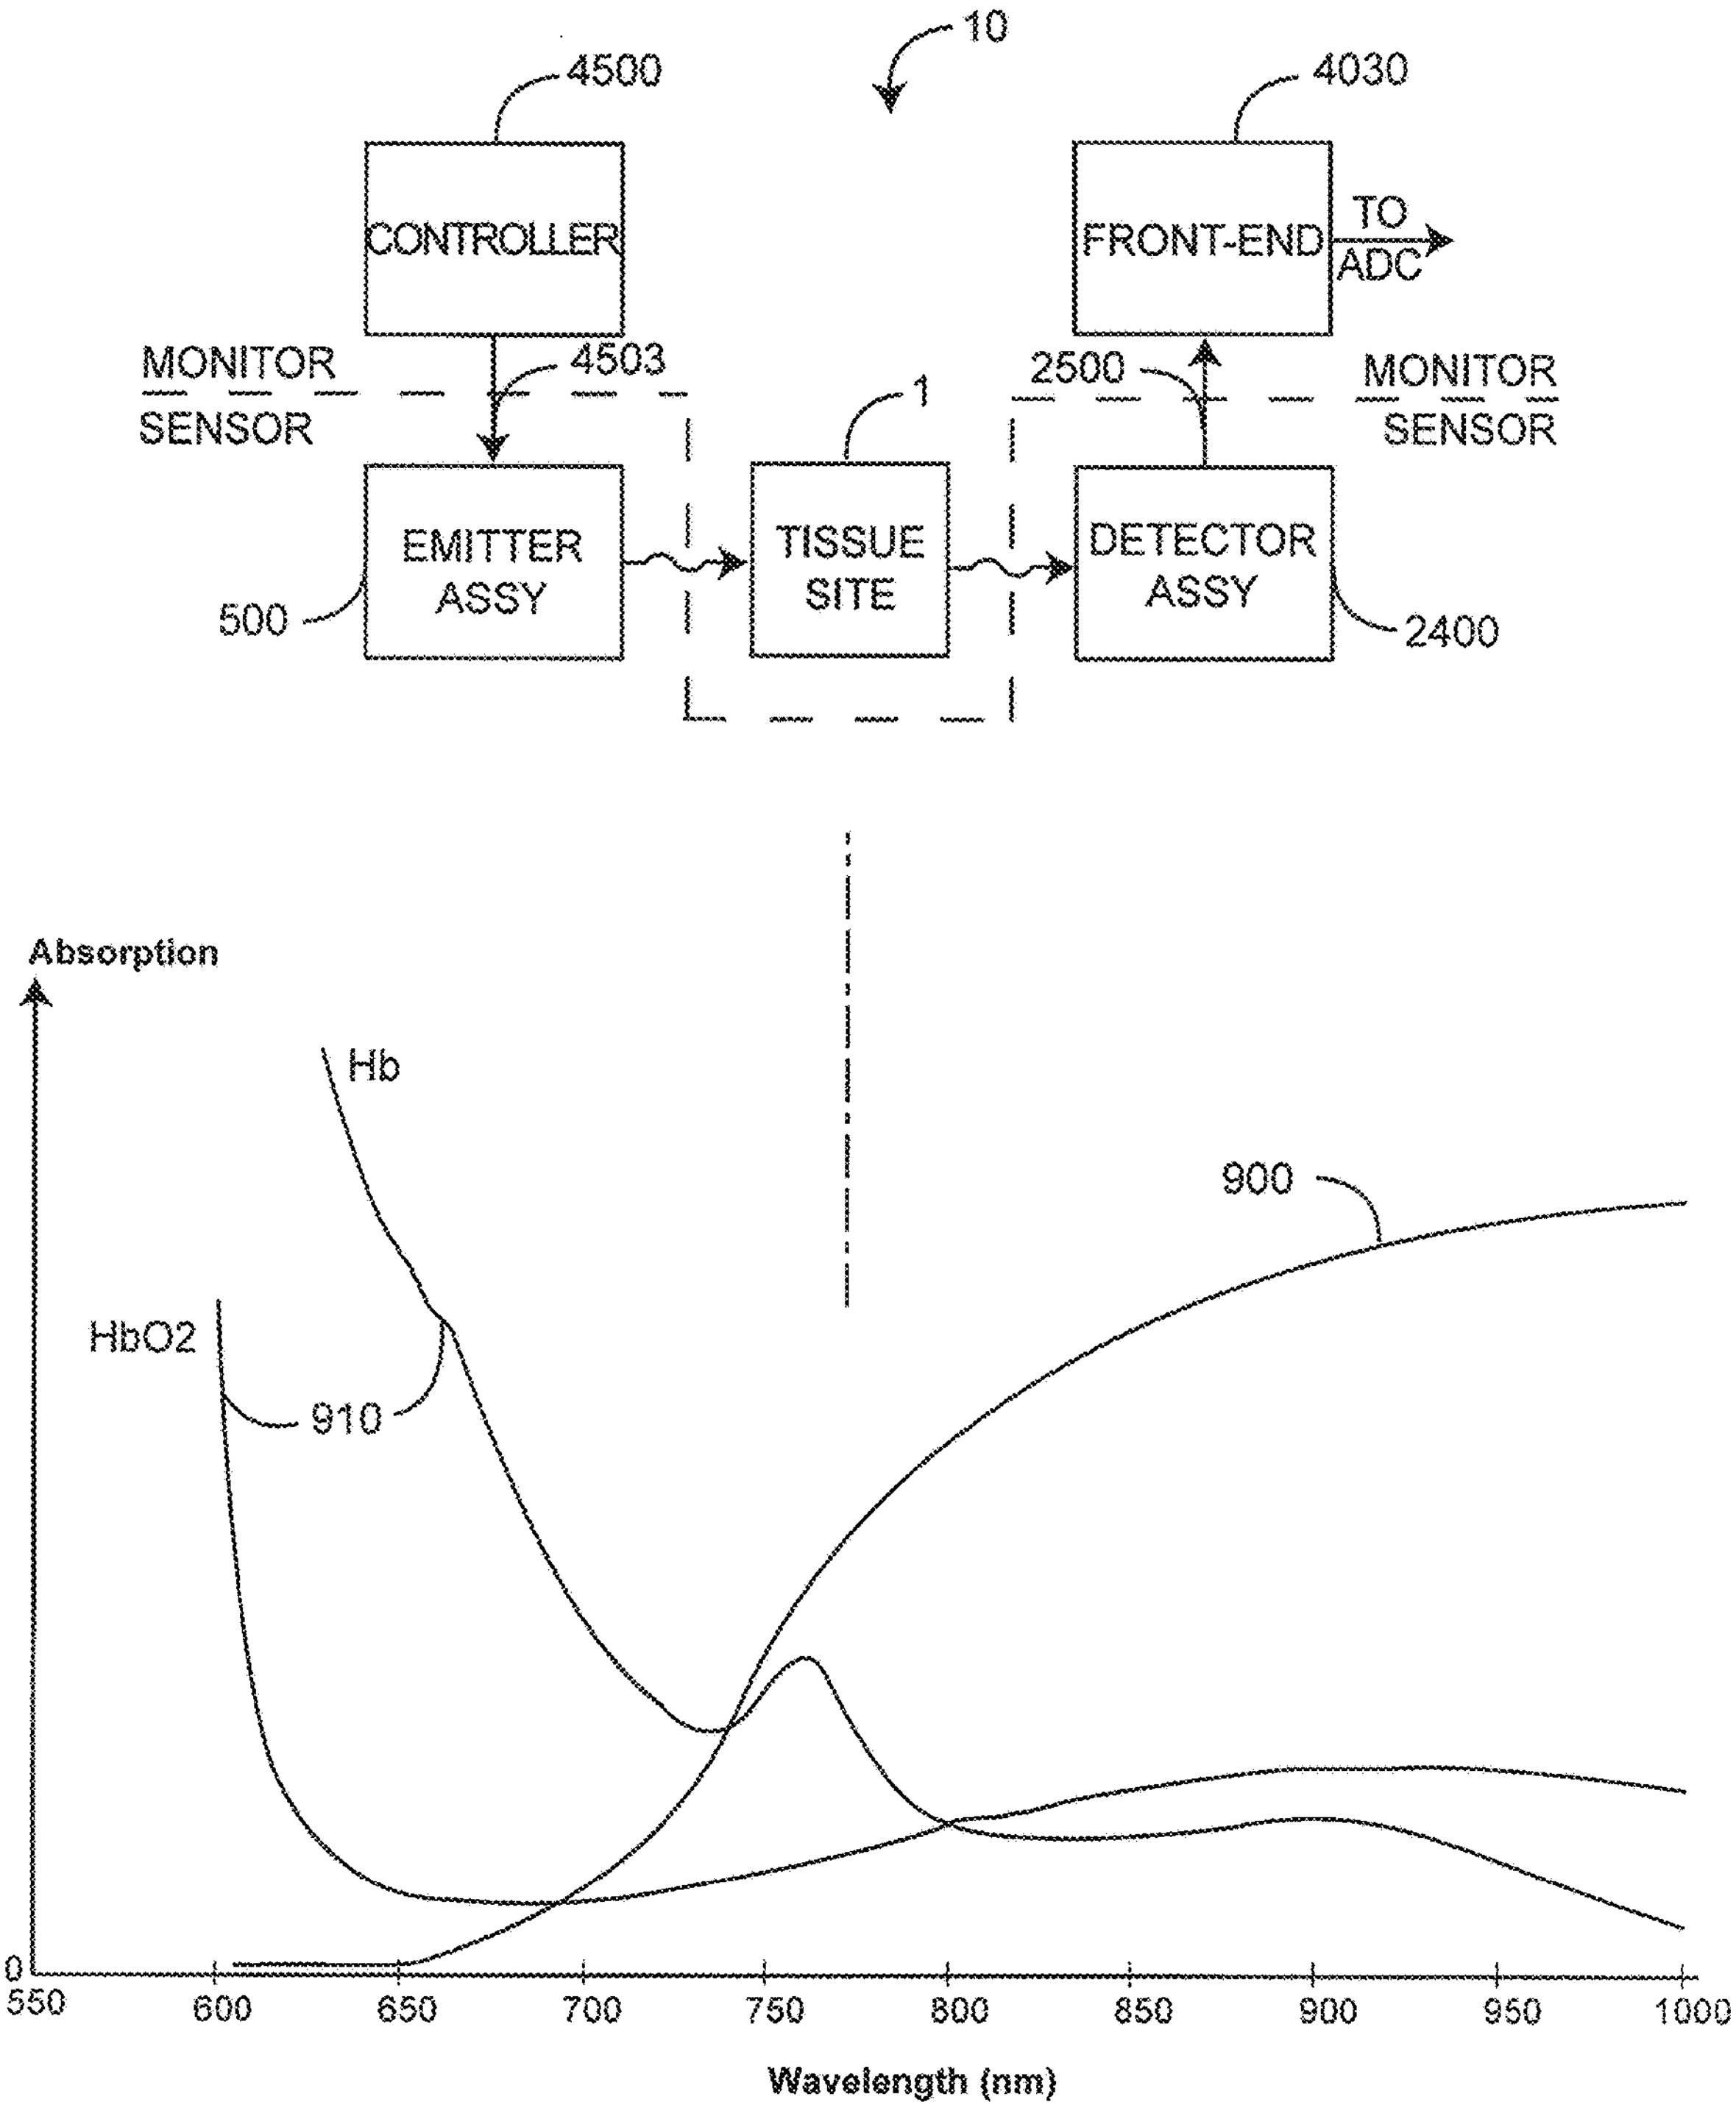

10
4500
CONTROLLER
4030
FRONT-END
TO ADC
MONITOR SENSOR
4503
2500
1
MONITOR SENSOR
EMITTER ASSY
TISSUE SITE
DETECTOR ASSY
500
2400
Absorption
Hb
900
HbO2
910
0
550
600
650
700
750
800
850
900
950
1000
Wavelength (nm)

FIG. 9

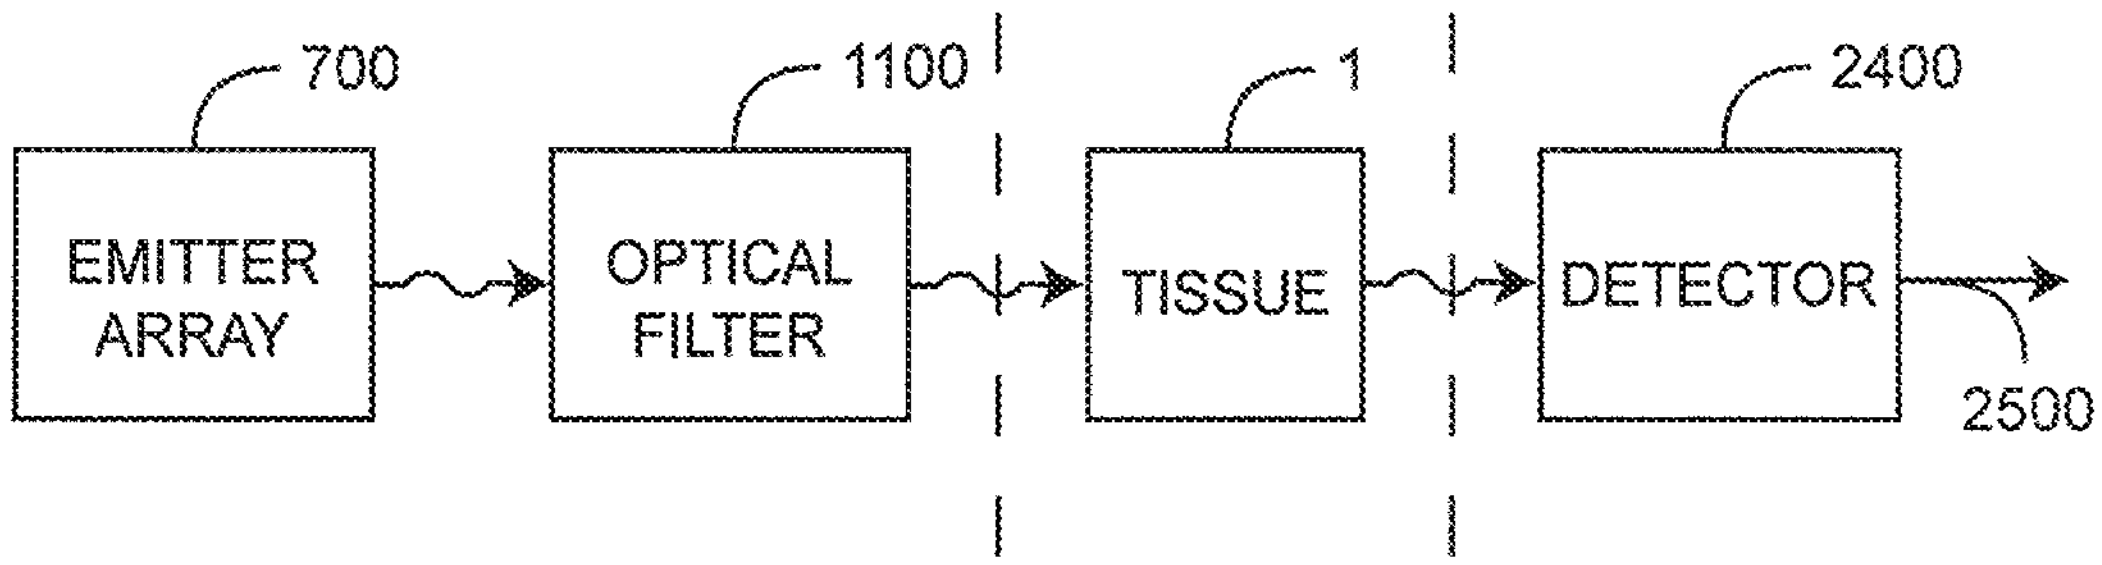

FIG. 10A

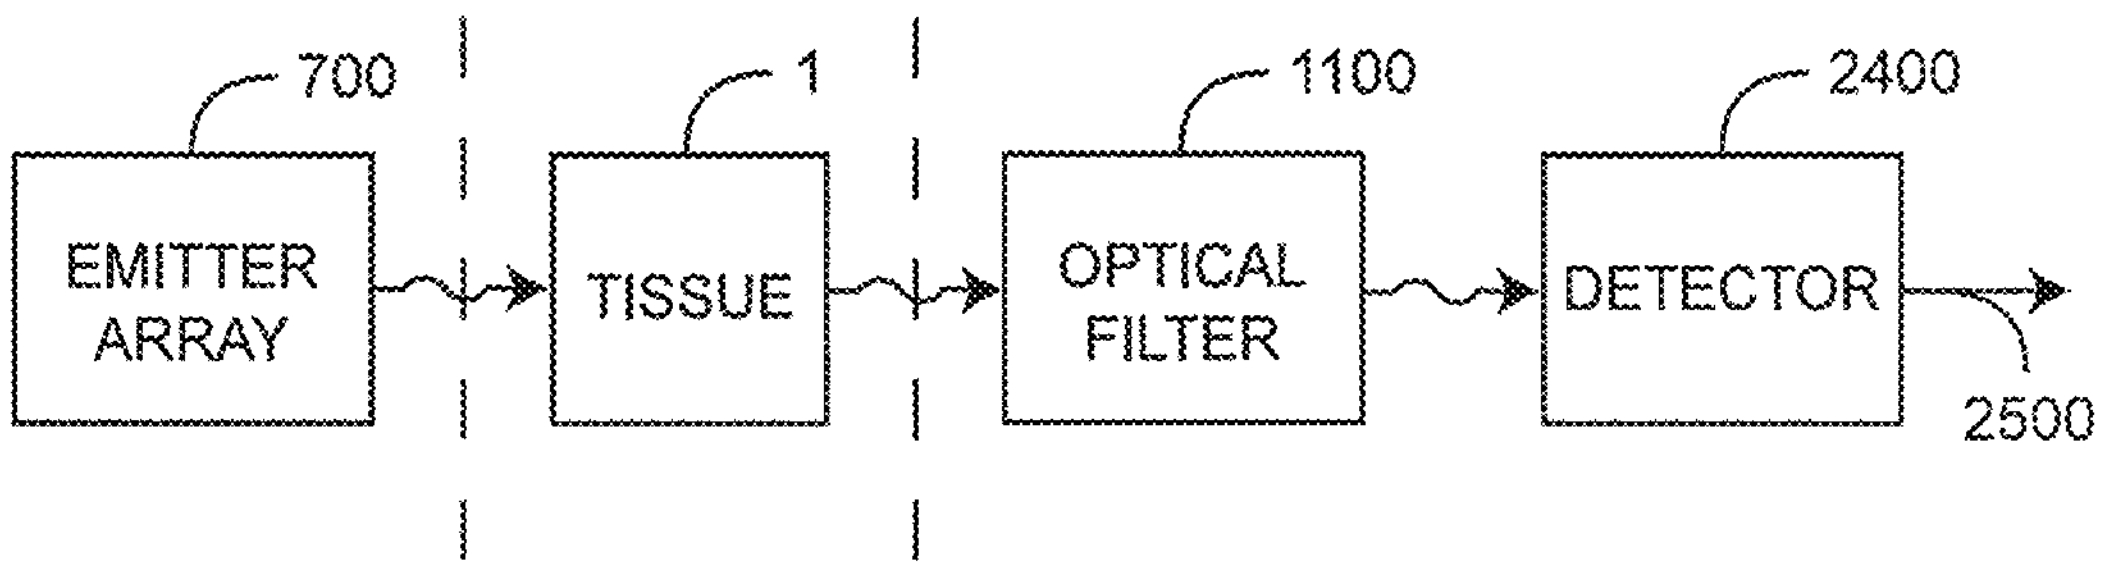

FIG. 10B

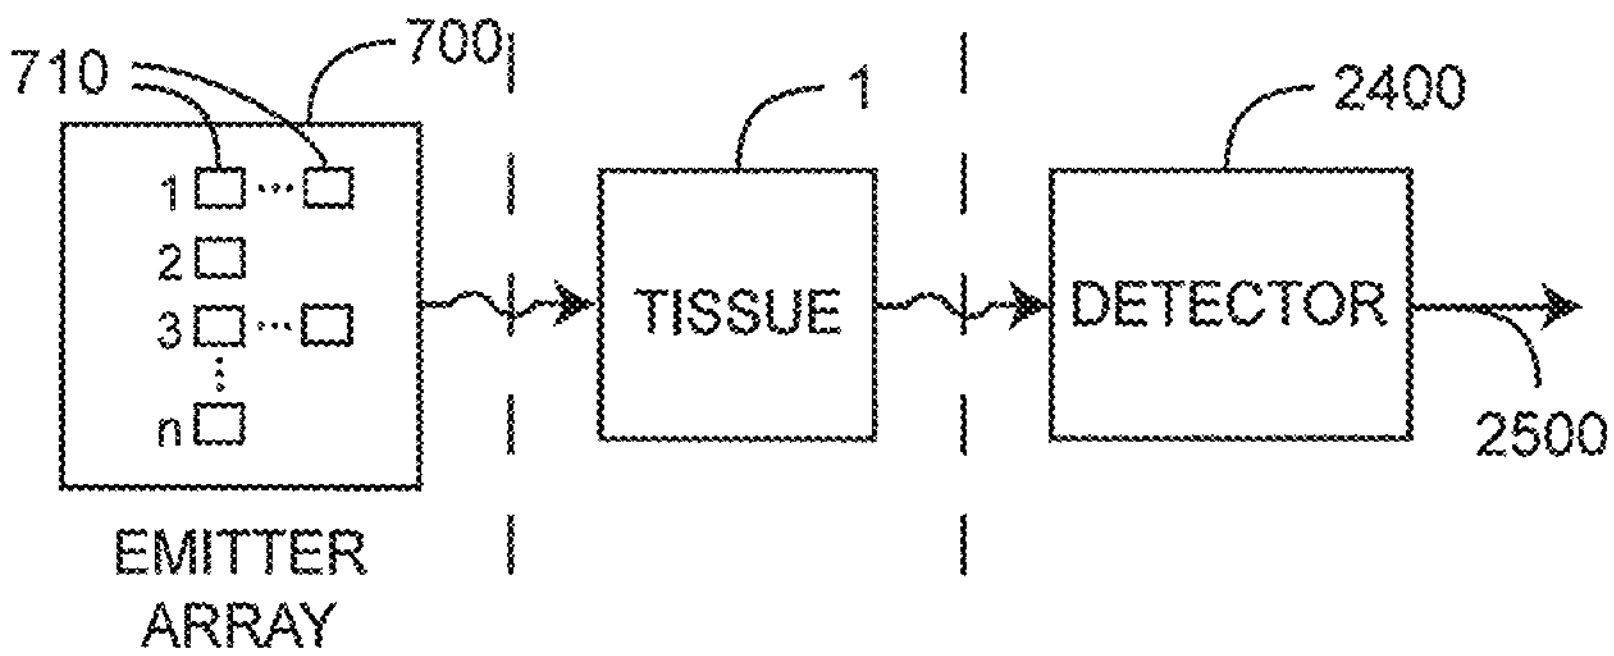

FIG. 10C

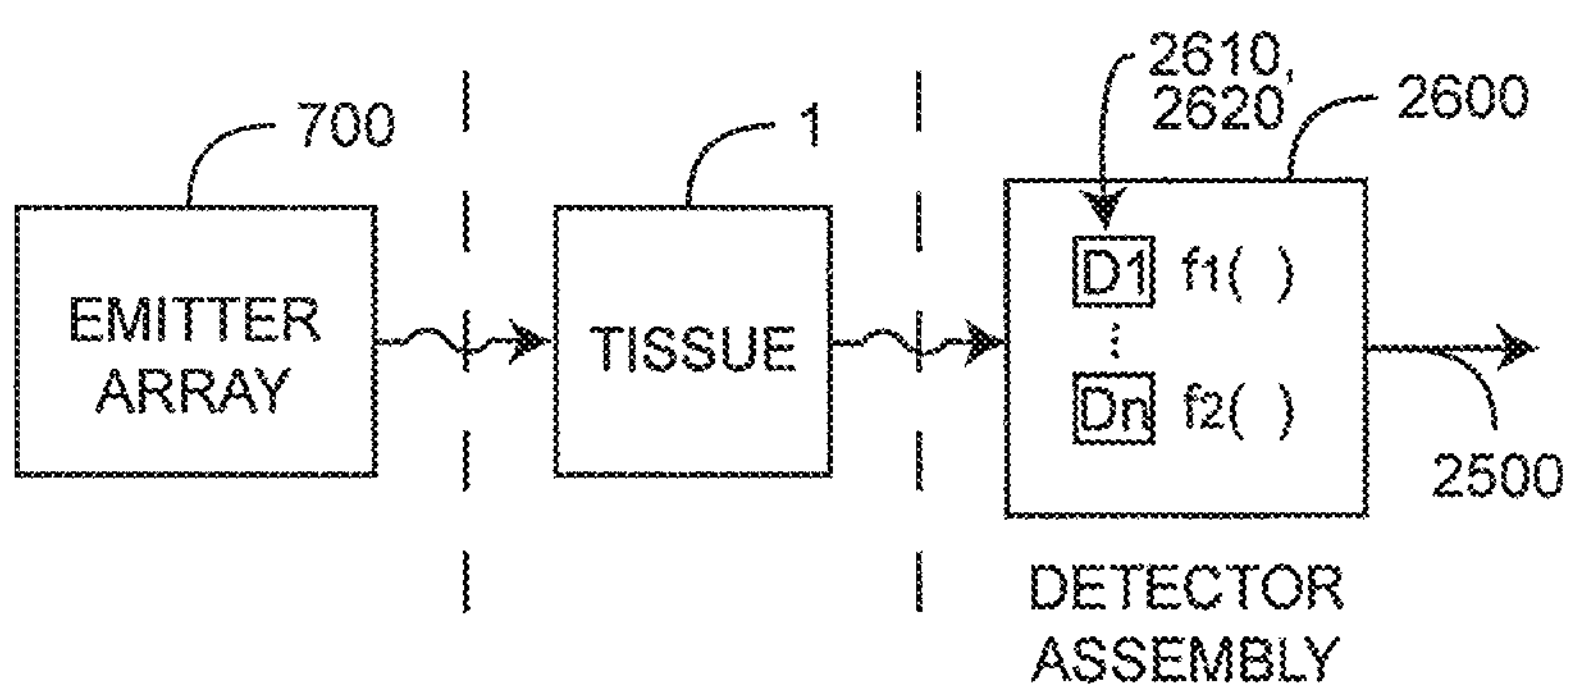

FIG. 10D

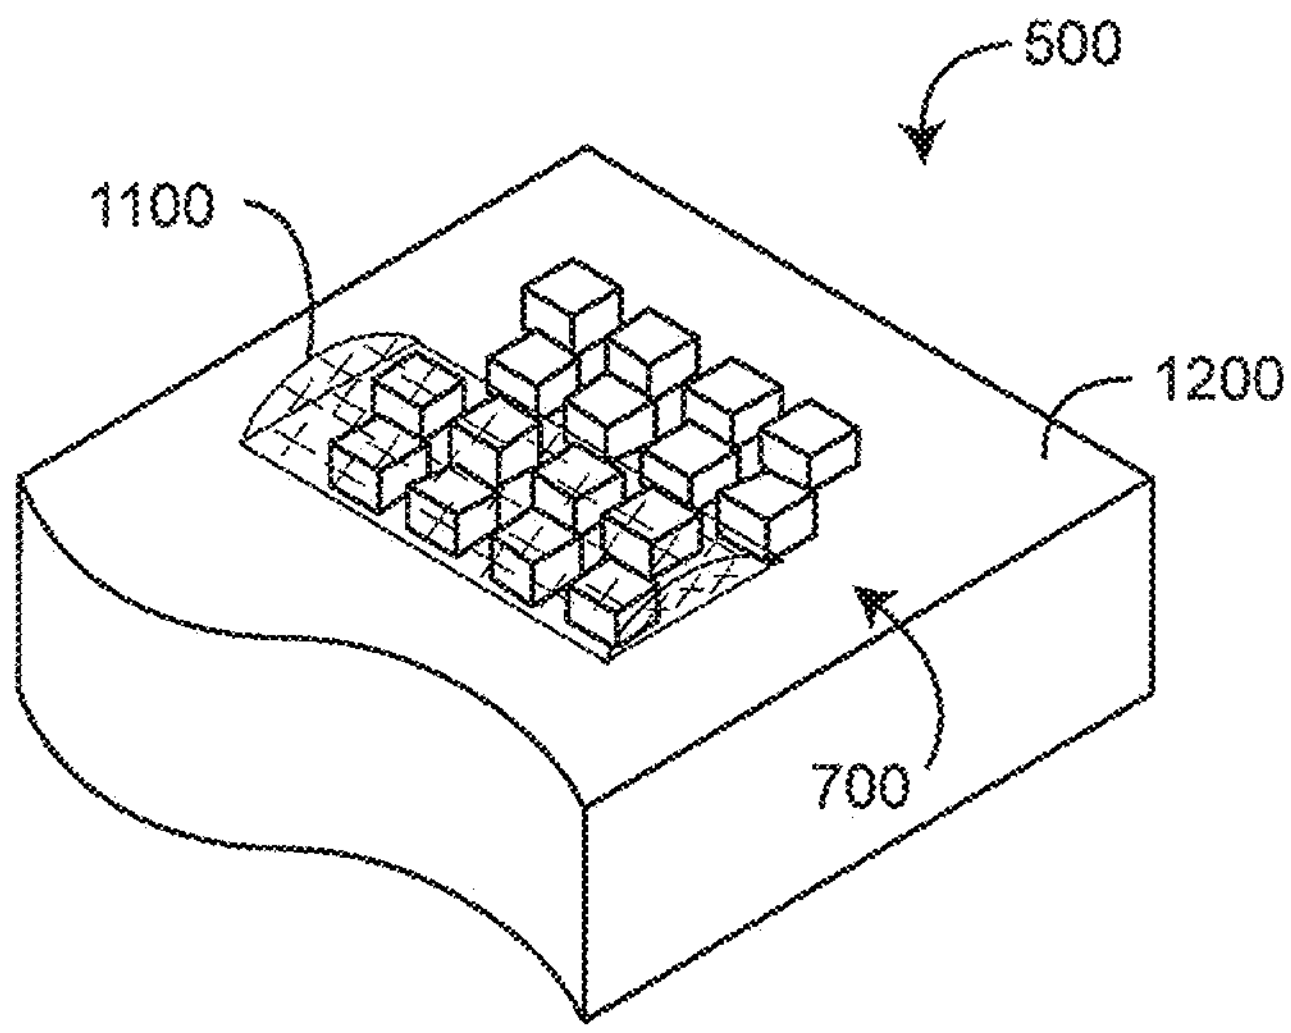

FIG. 11A

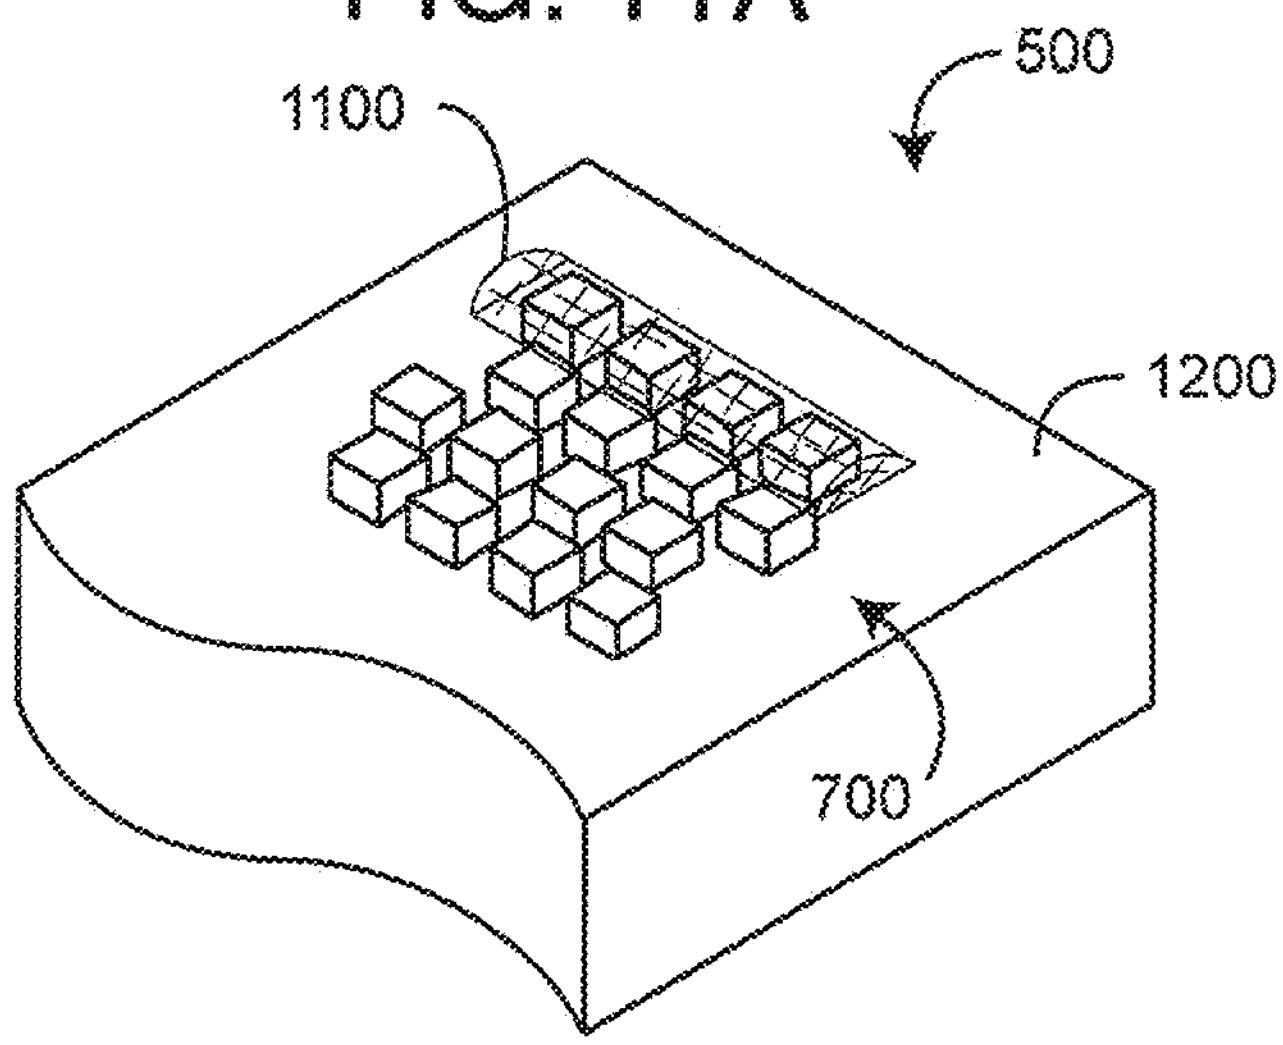

FIG. 11B

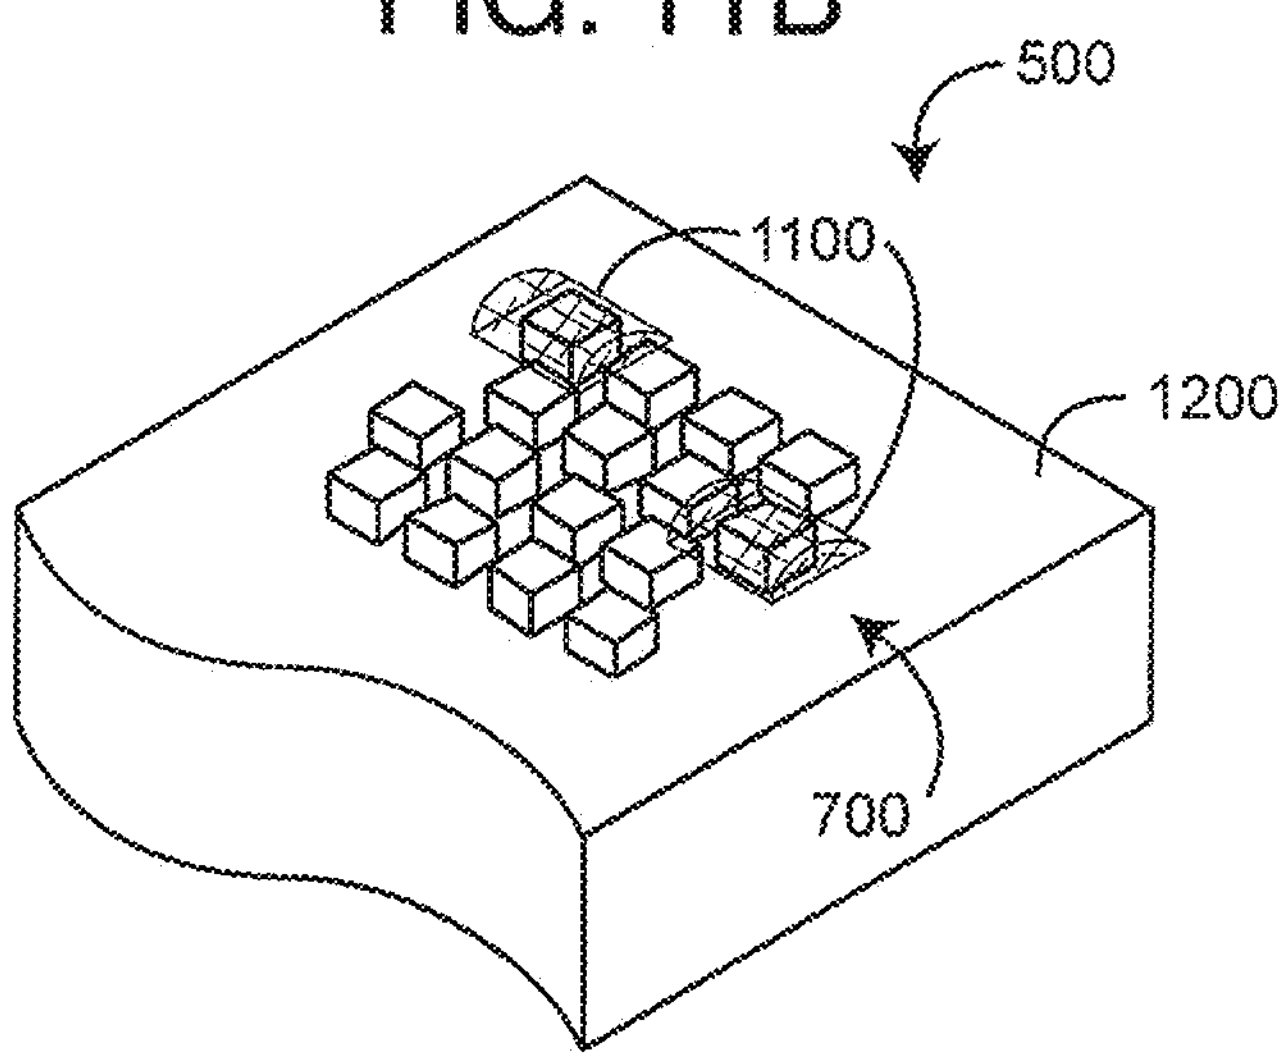

FIG. 11C

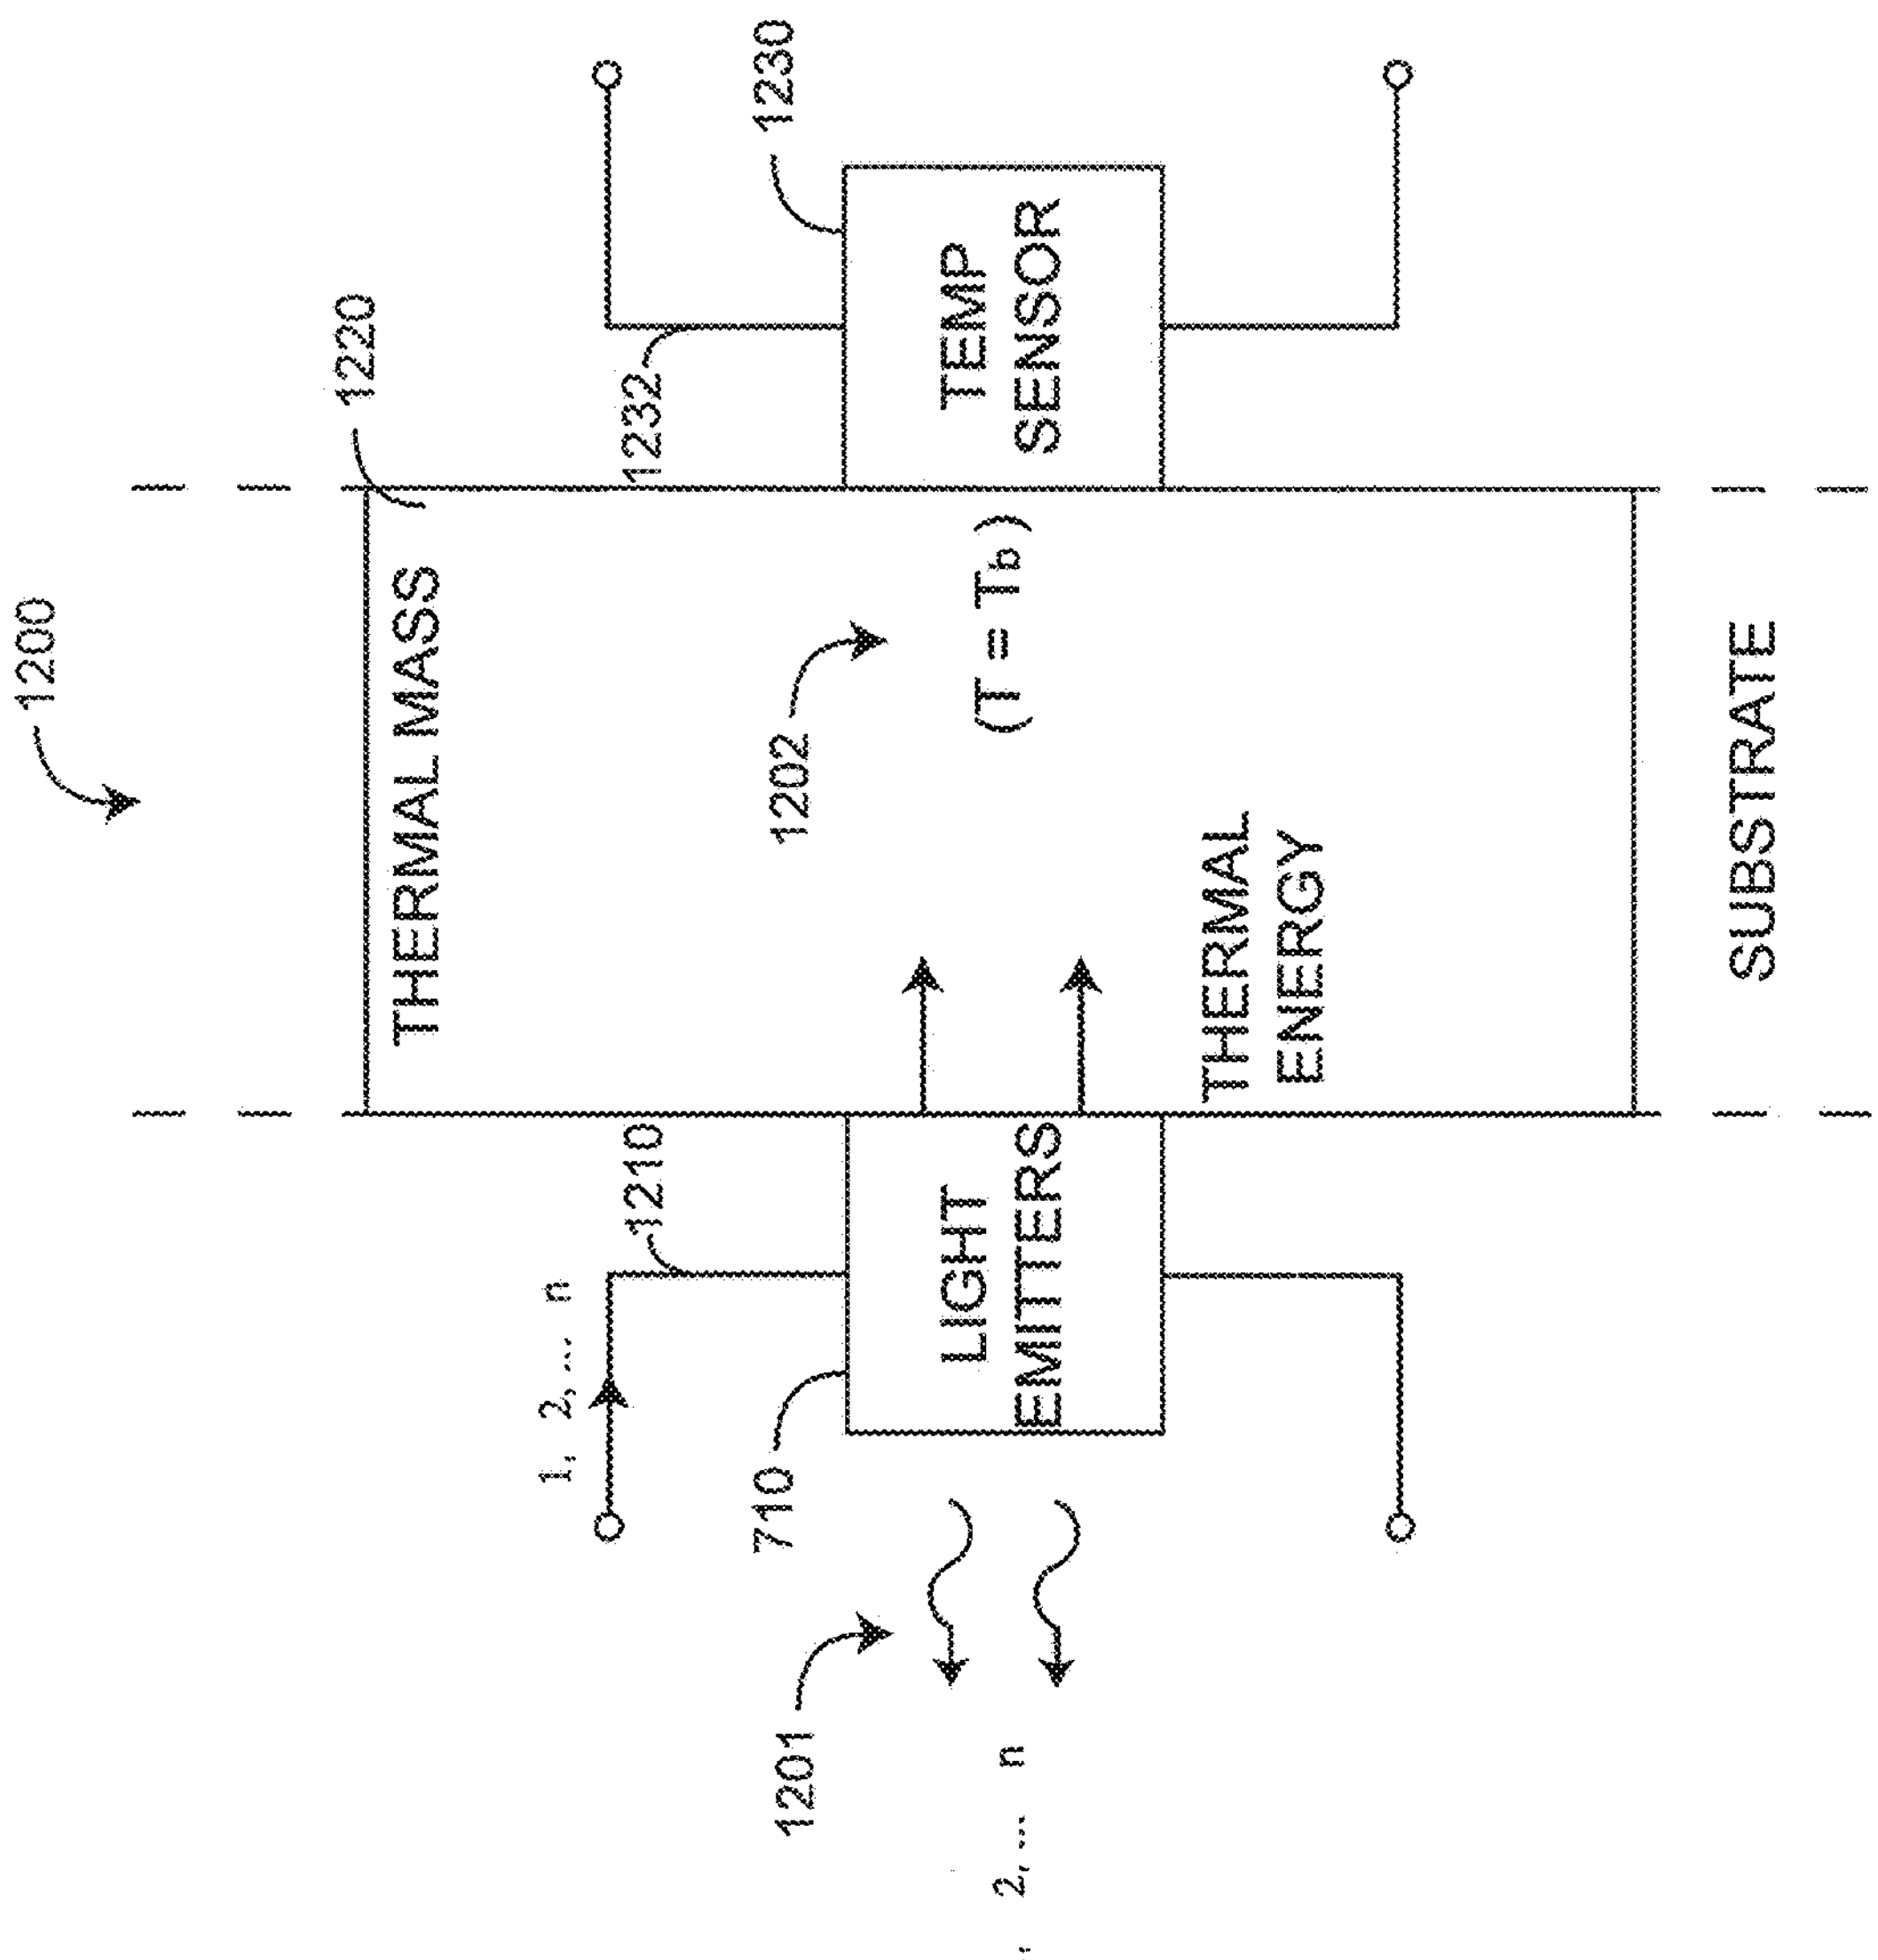
1200
THERMAL MASS
1220
1232
1230
TEMP SENSOR
1202
(T = Tb)
THERMAL ENERGY
SUBSTRATE
1210
LIGHT EMITTERS
710
1, 2, ... n
1201
1, 2, ... n

FIG. 12

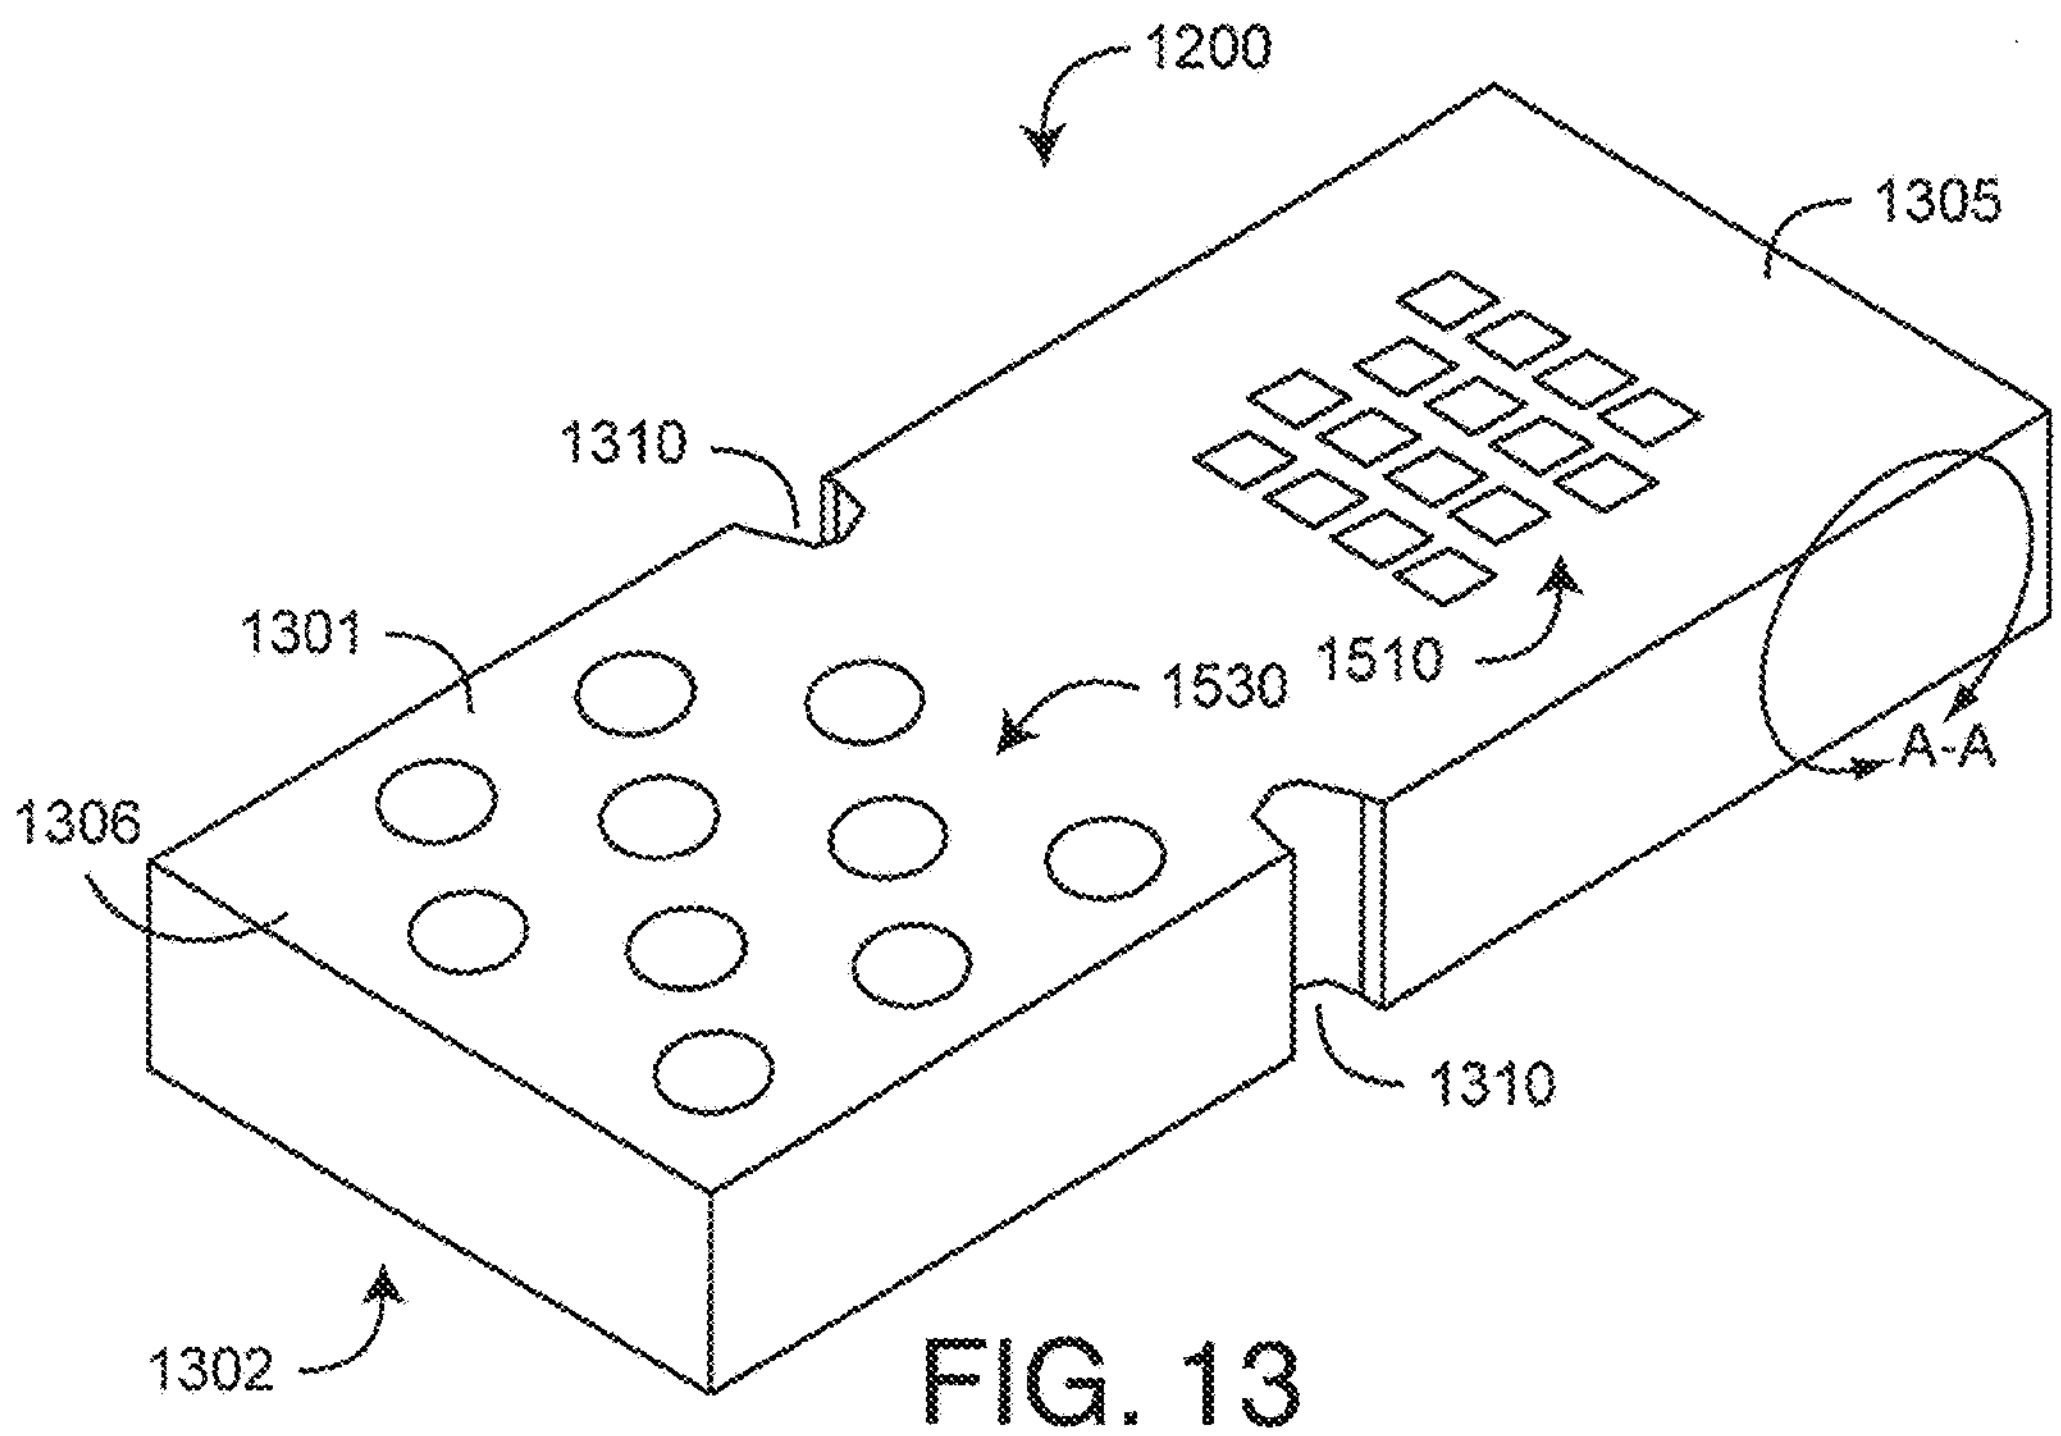

FIG. 13

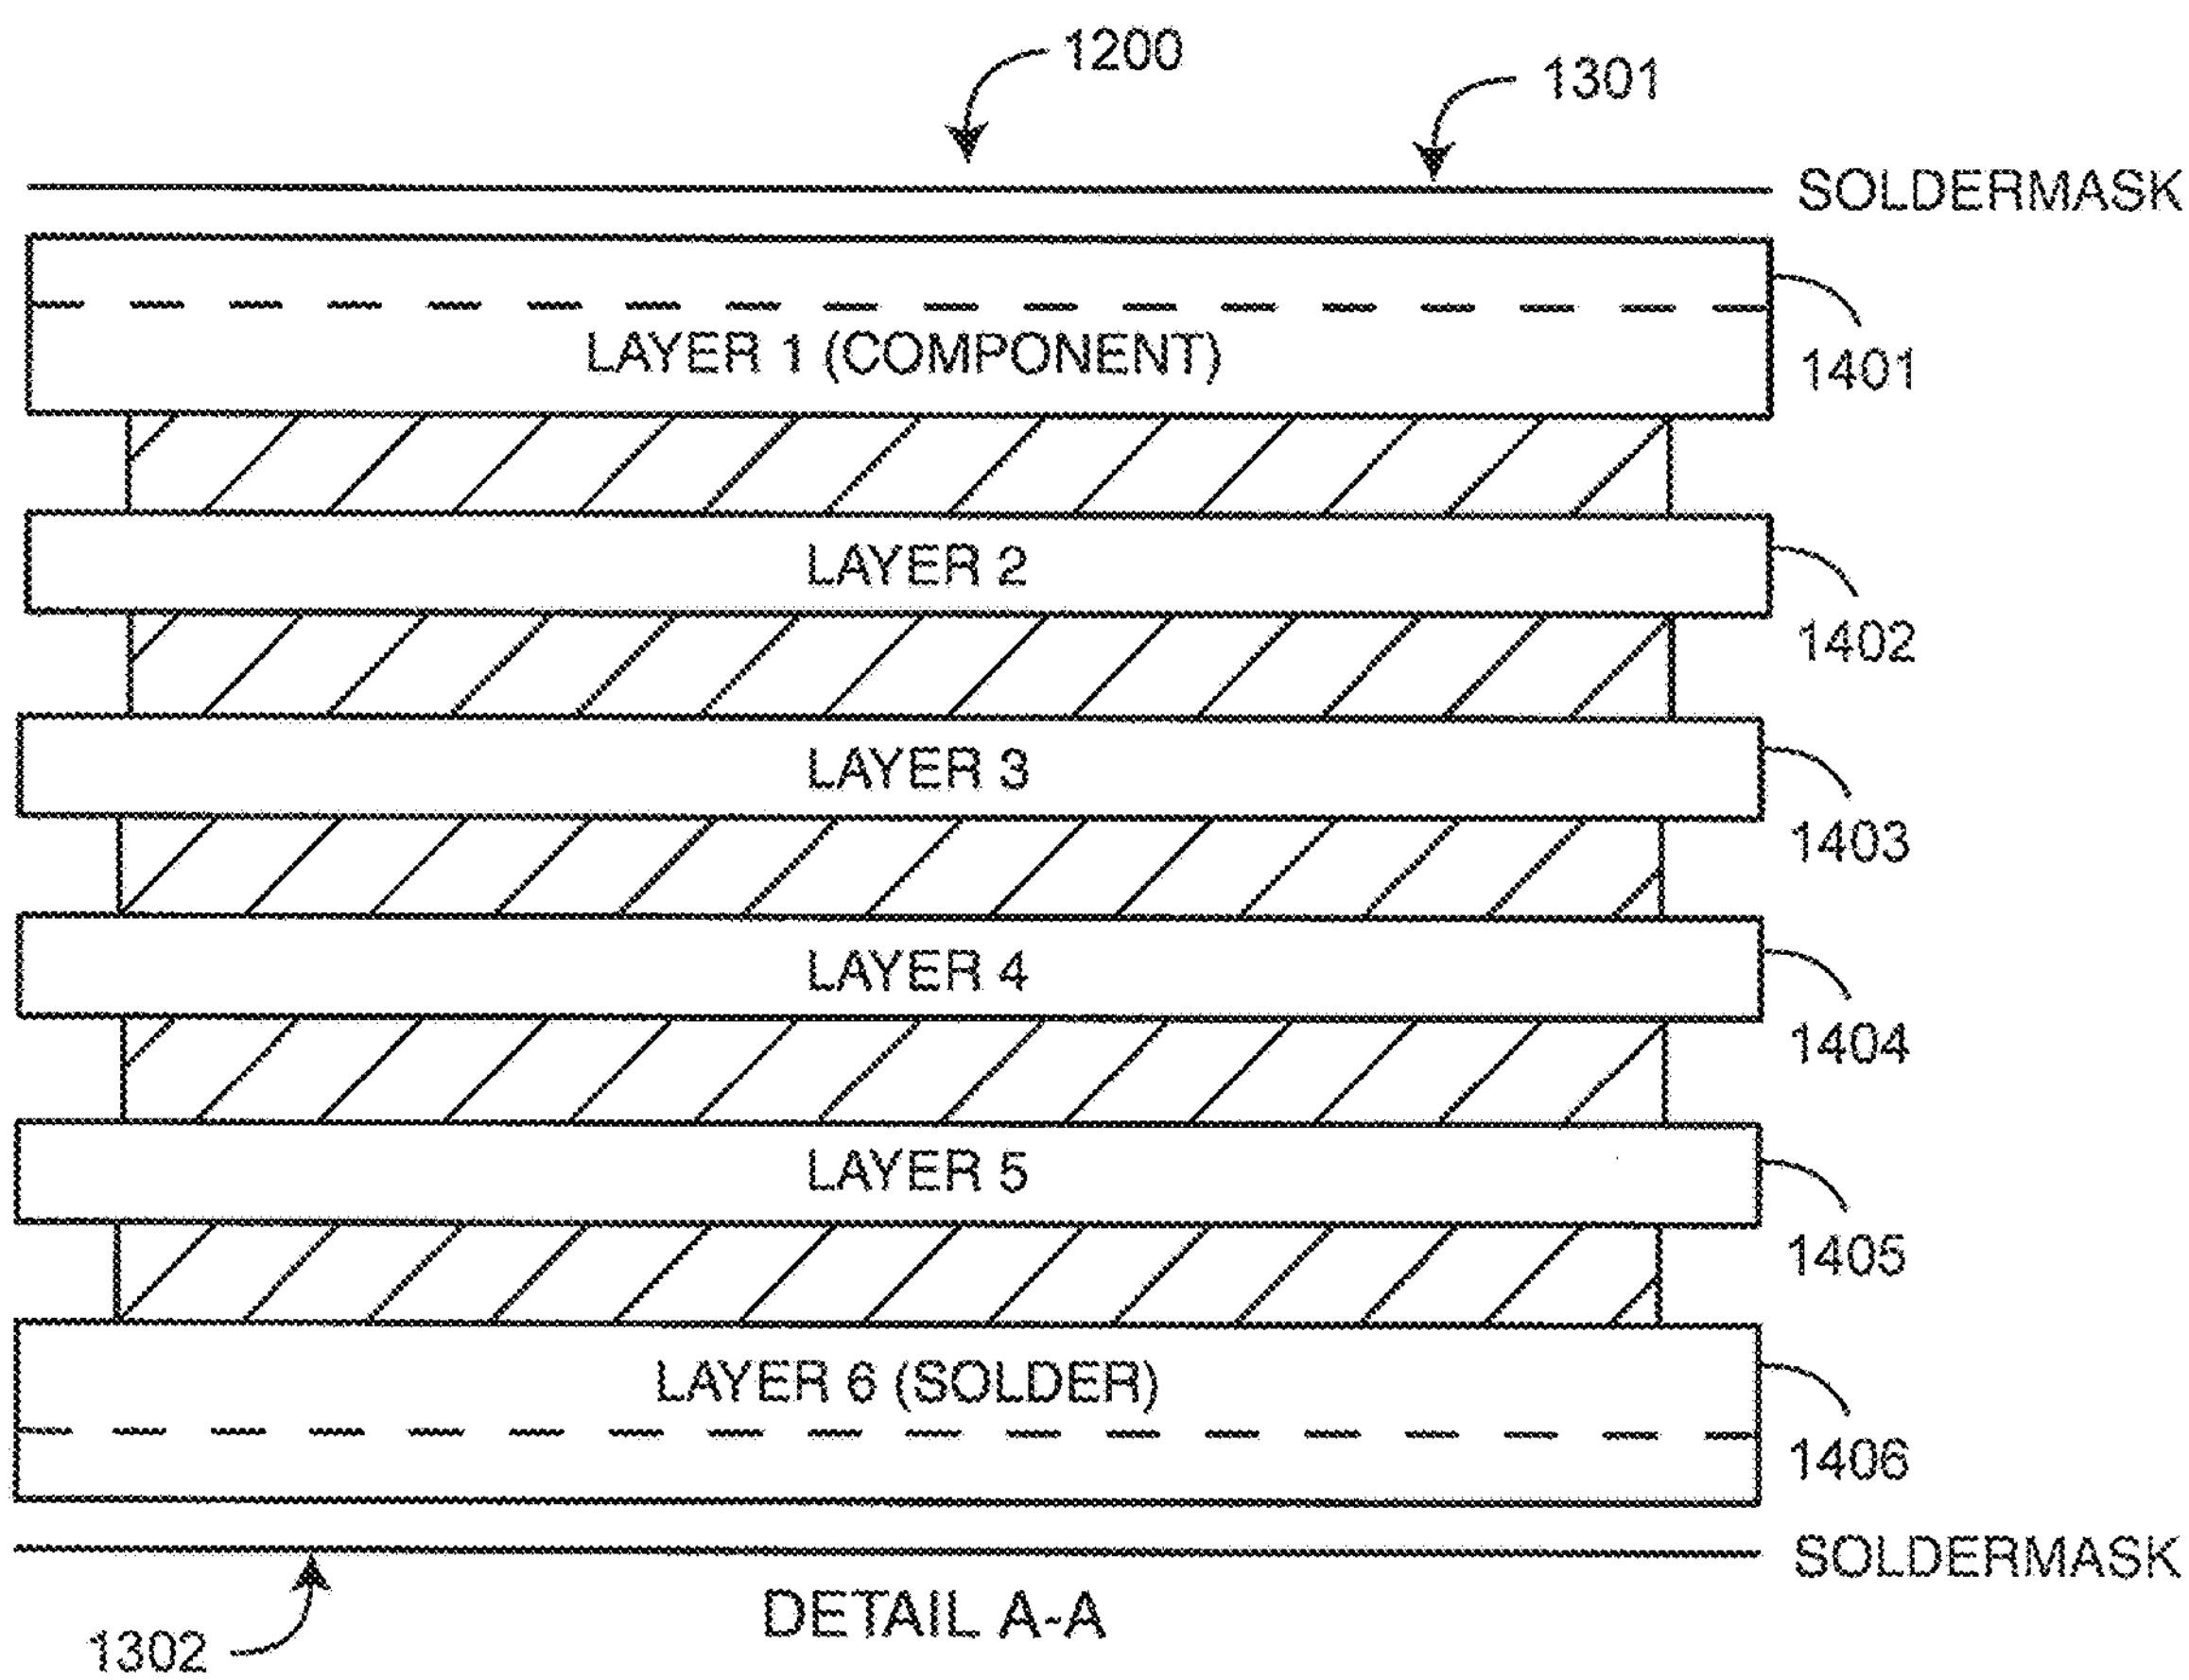

DETAIL A-A

FIG. 14

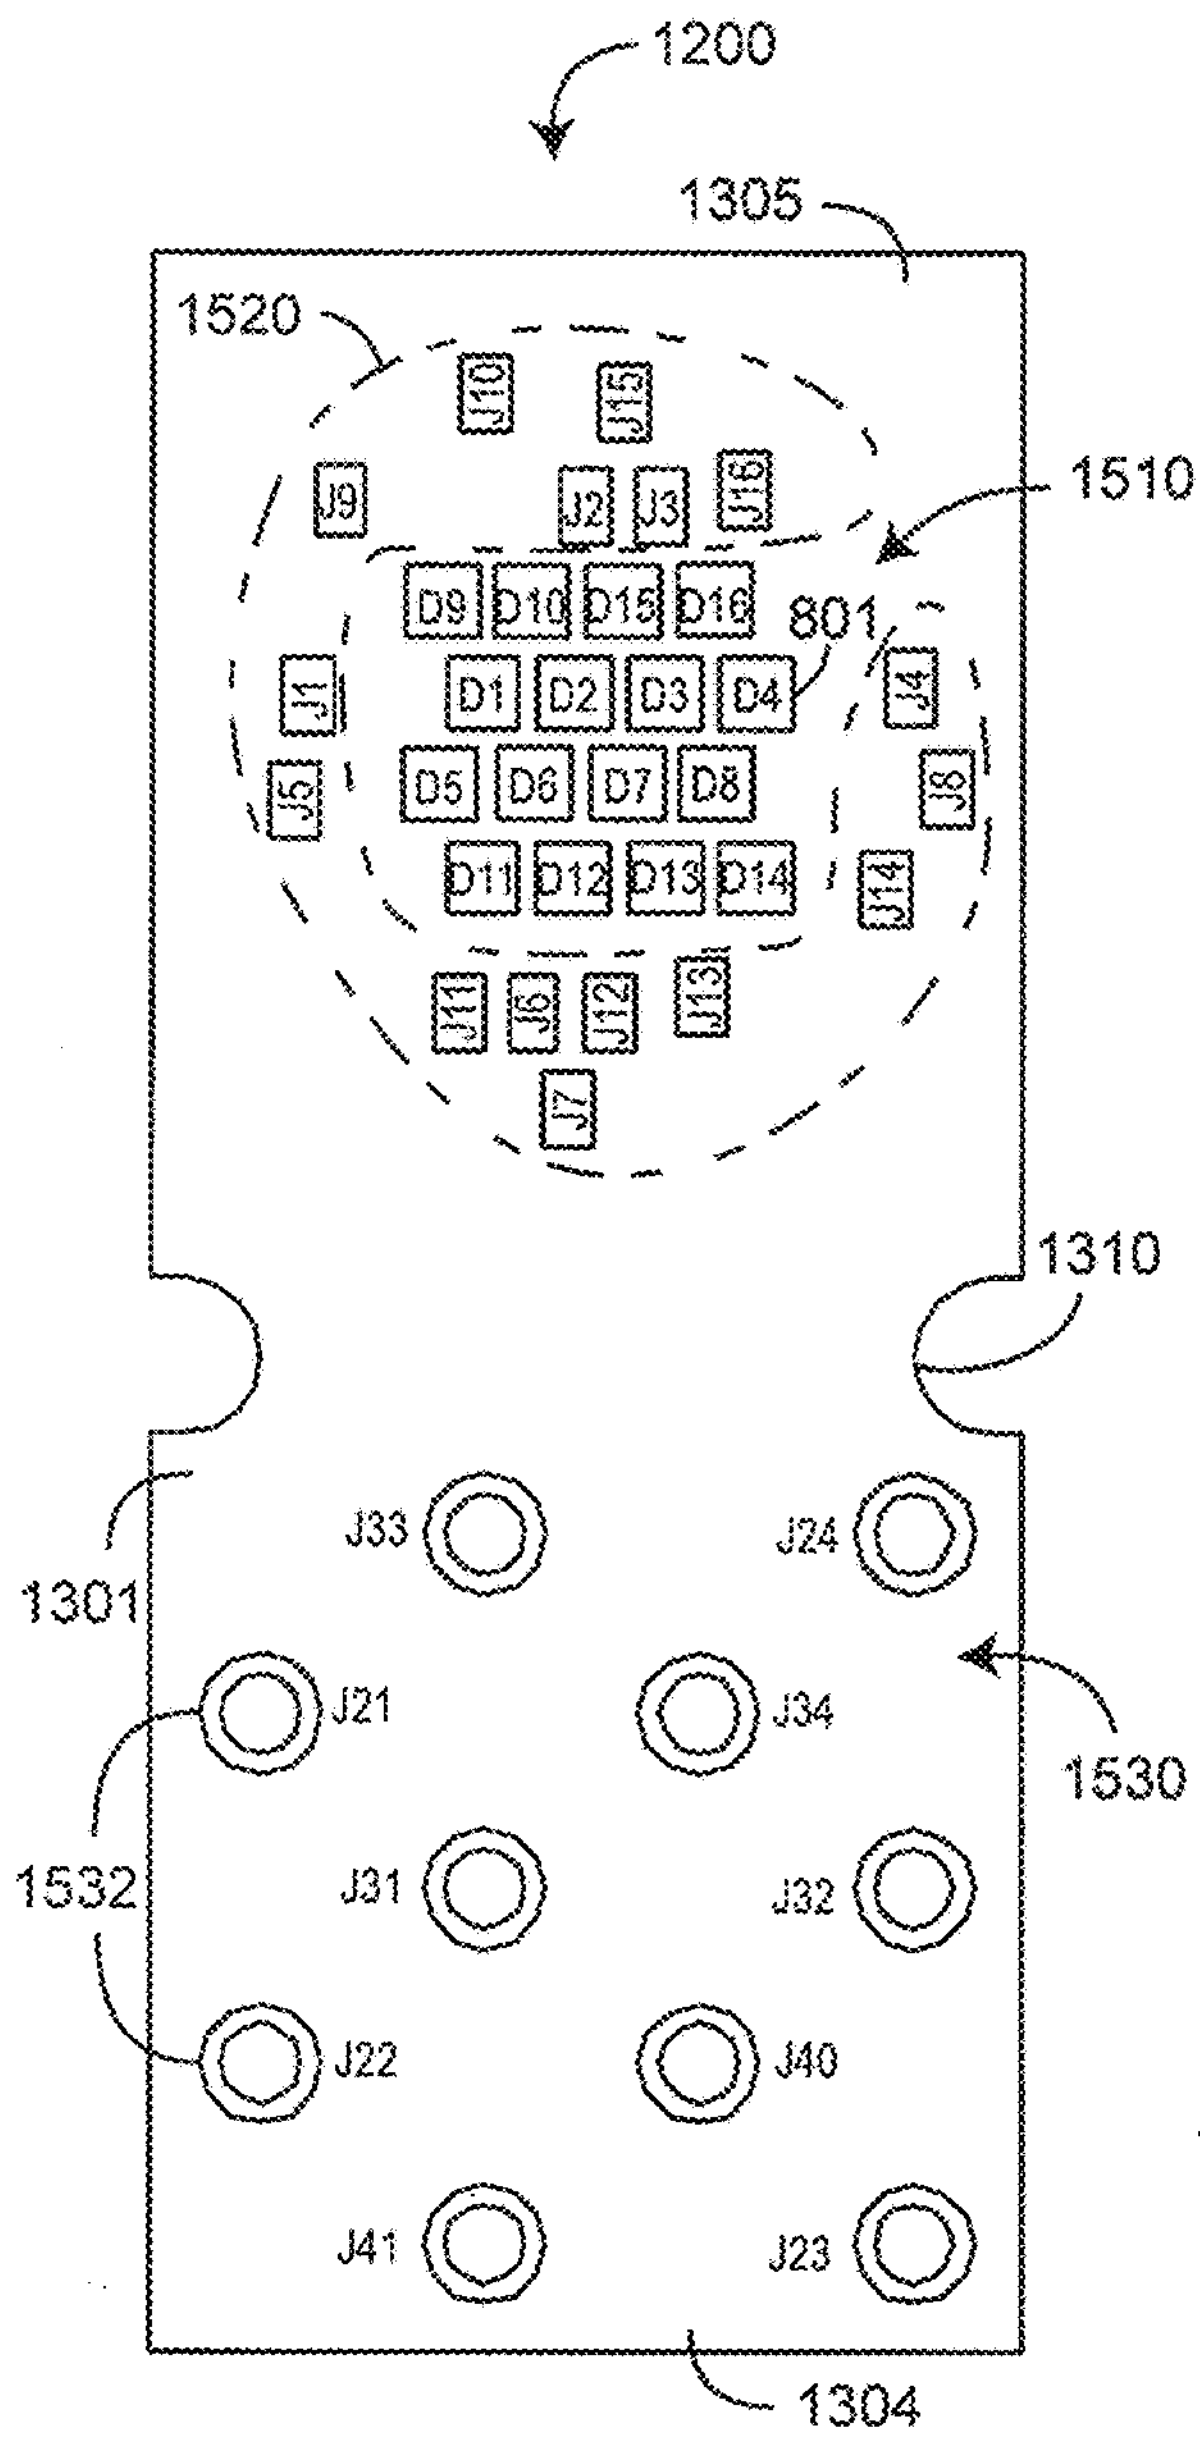
1200
1305
1520
J10
J15
J9
J2
J3
J16
1510
D9
D10
D15
D16
801
J1
D1
D2
D3
D4
J4
J5
D5
D6
D7
D8
J8
D11
D12
D13
D14
J14
J11
J6
J12
J13
J7
1310
1301
J33
J24
J21
J34
1530
1532
J31
J32
J22
J40
J41
J23
1304

FIG. 15

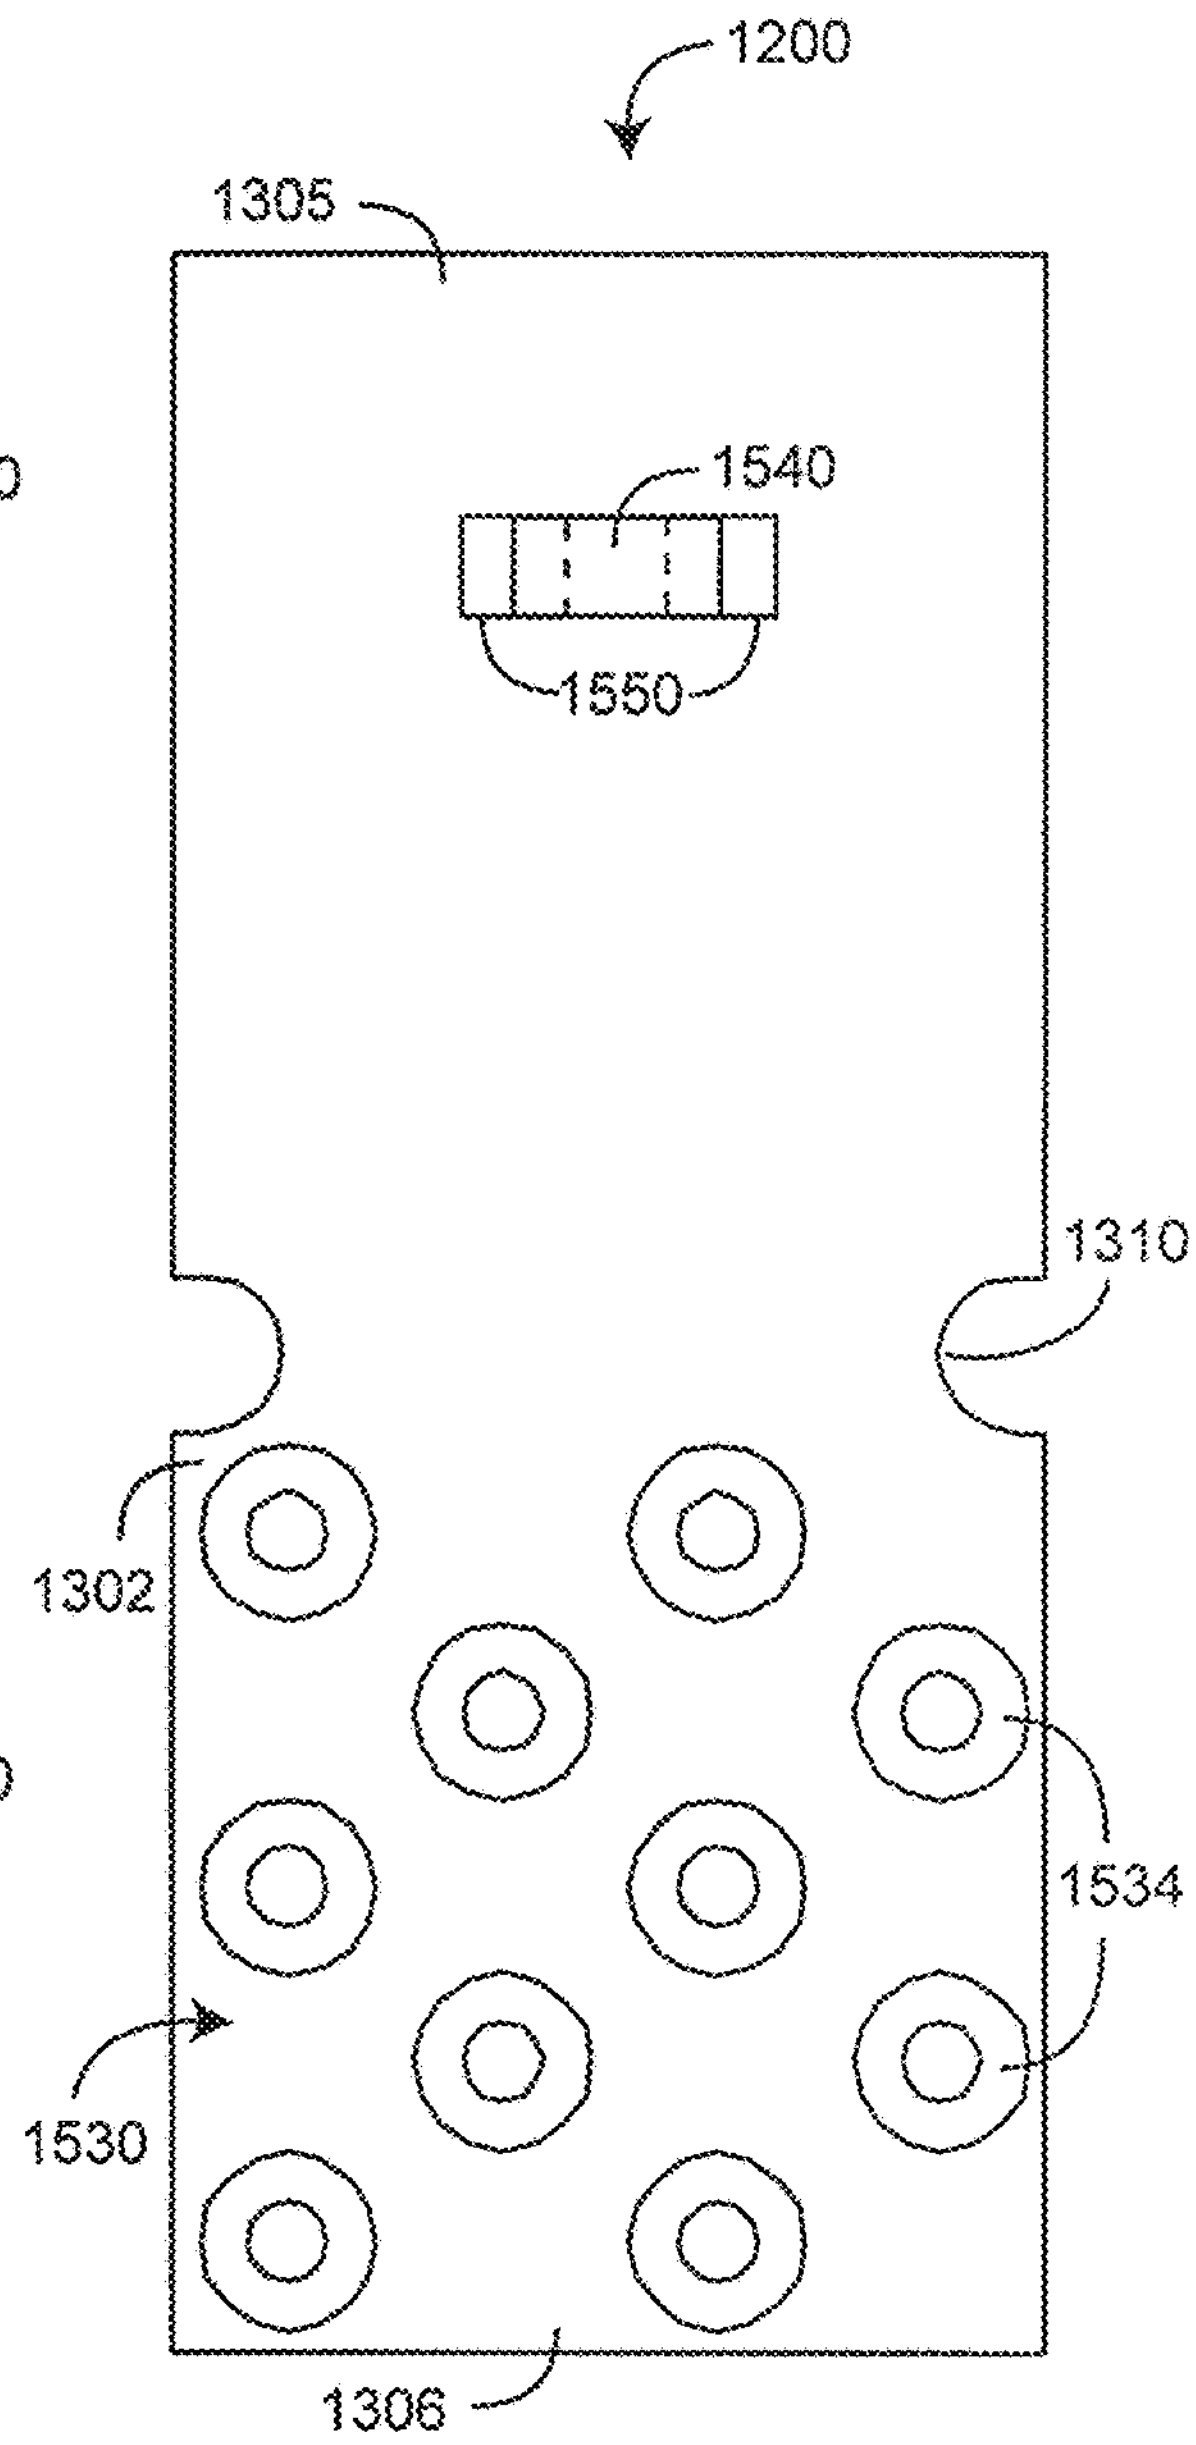
1200
1305
1540
1550
1310
1302
1534
1530
1306

FIG. 16

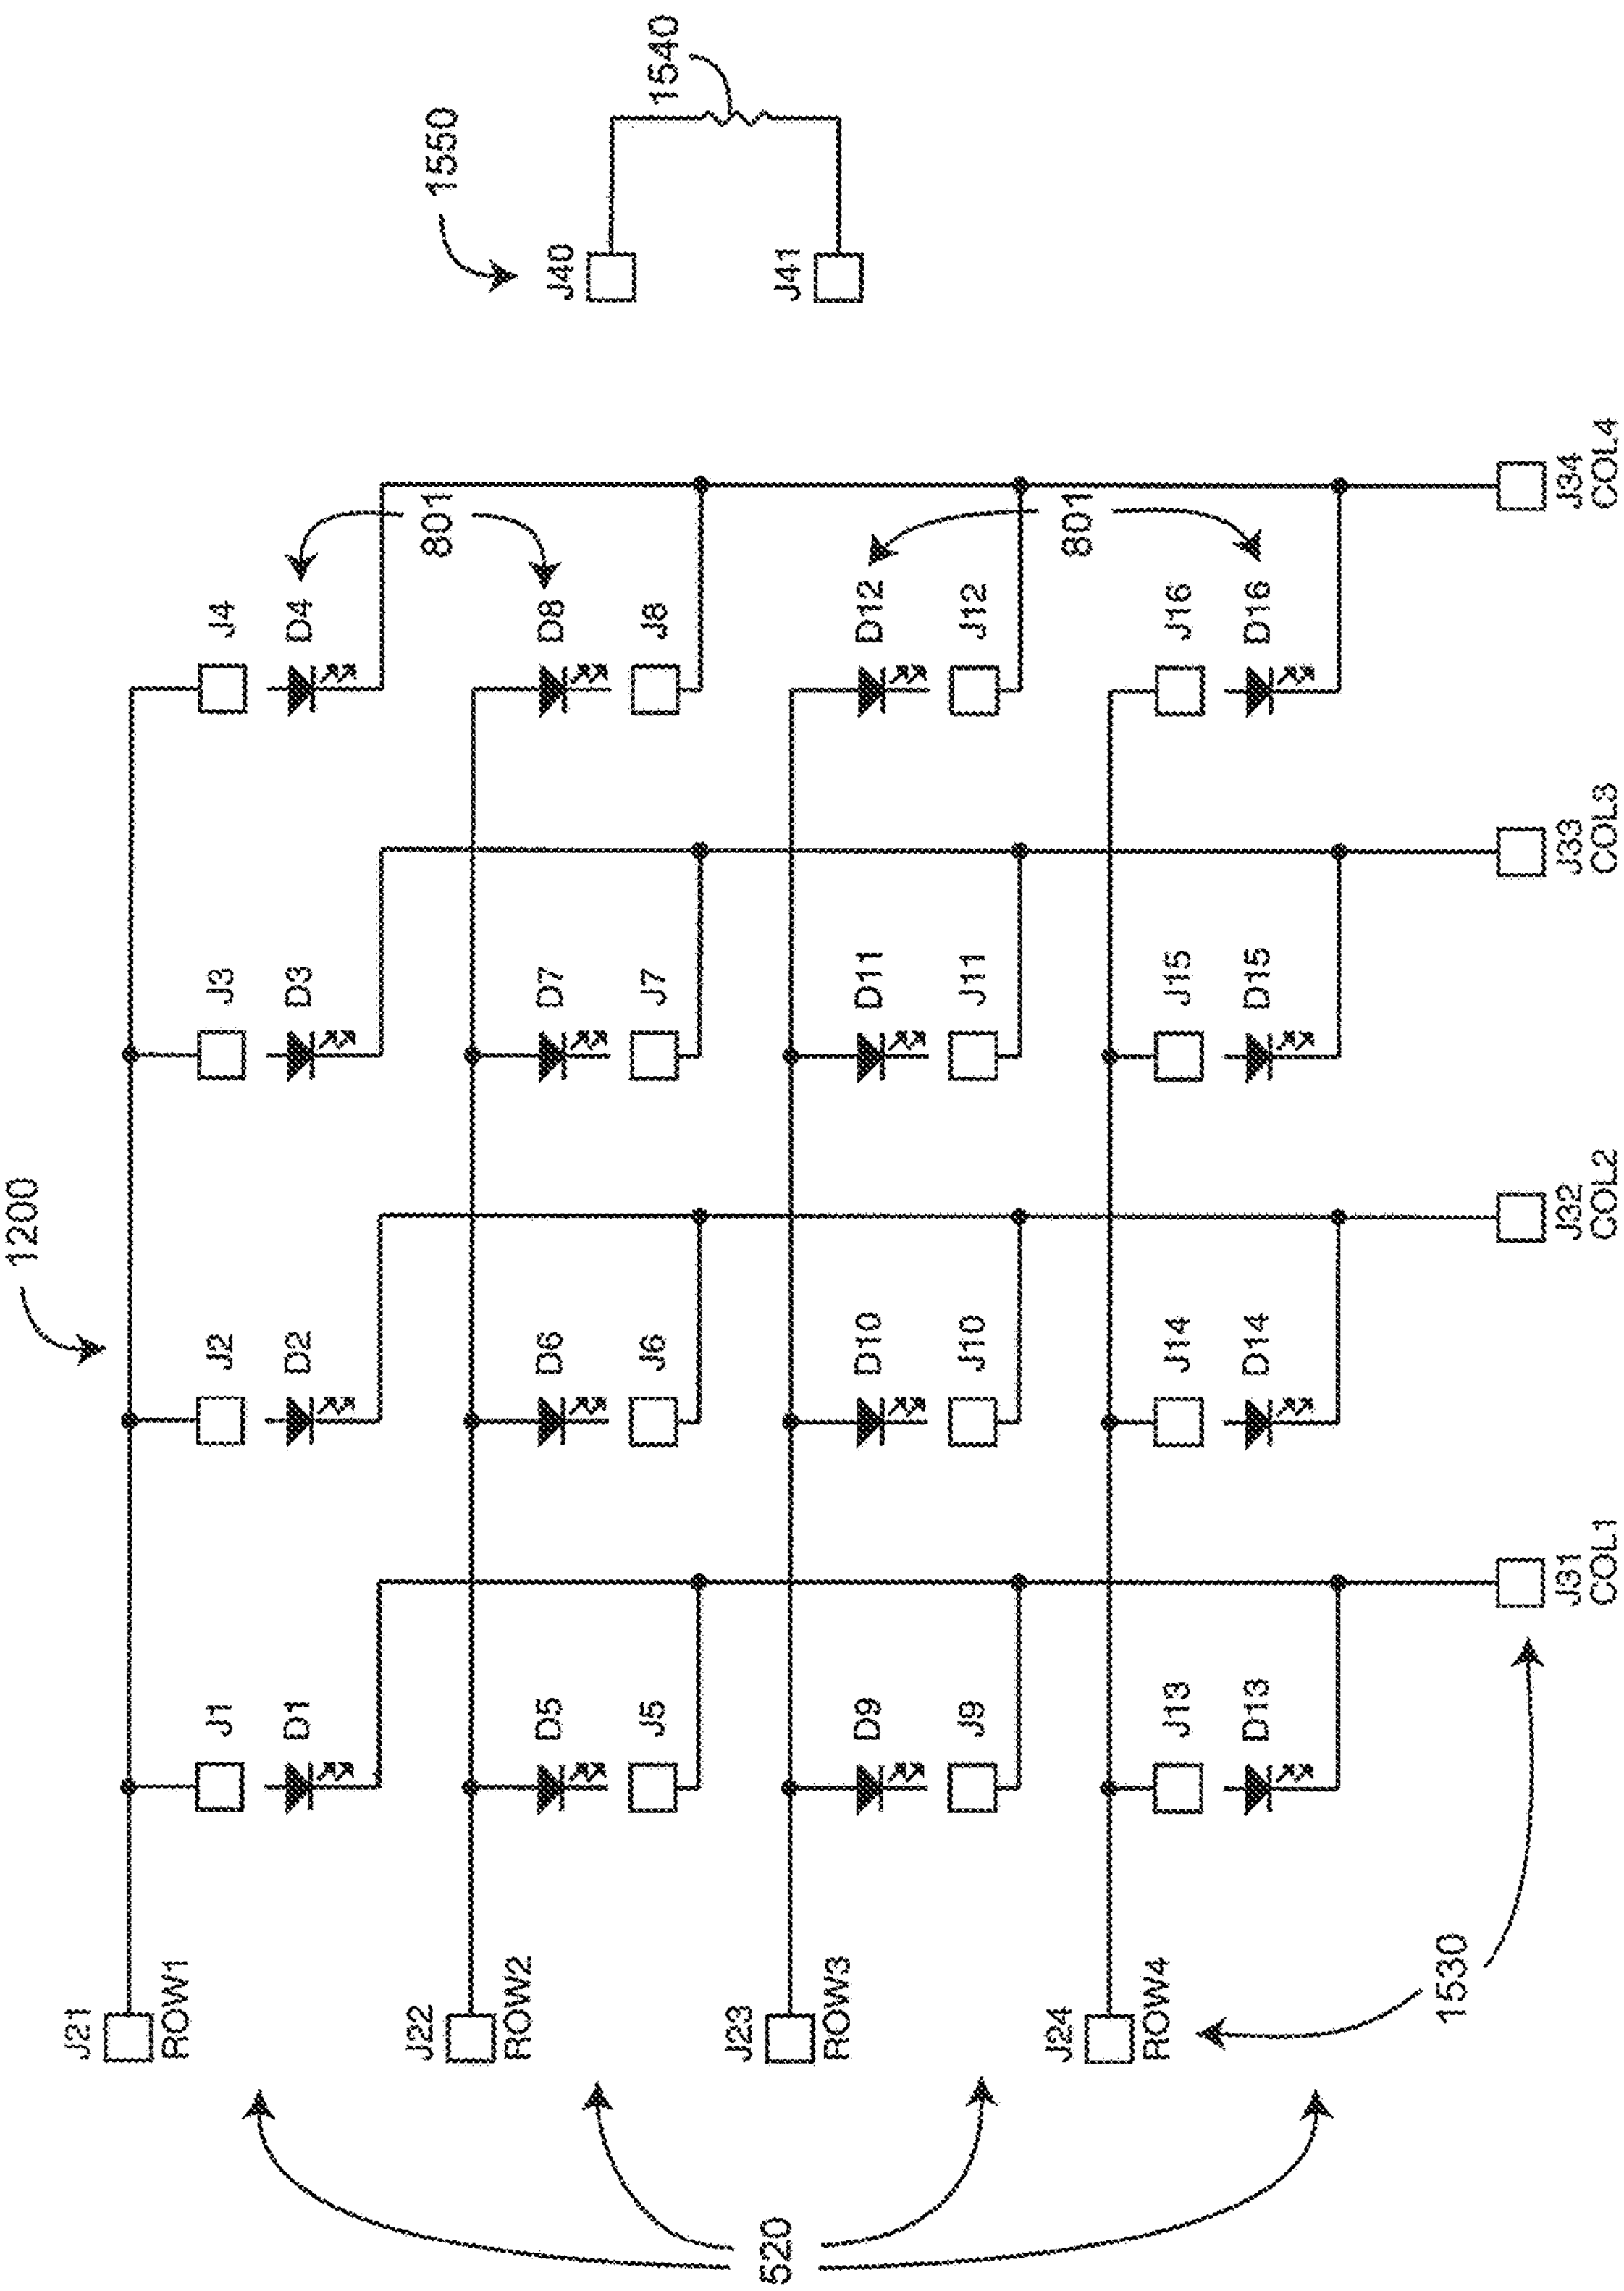
1550
J40
J41
1540
1200
801
801
J1
J2
J3
J4
D1
D2
D3
D4
D5
D6
D7
D8
J5
J6
J7
J8
D9
D10
D11
D12
J9
J10
J11
J12
J13
J14
J15
J16
D13
D14
D15
D16
J21
ROW1
J22
ROW2
J23
ROW3
J24
ROW4
J31
COL1
J32
COL2
J33
COL3
J34
COL4
1520
1530

FIG. 17

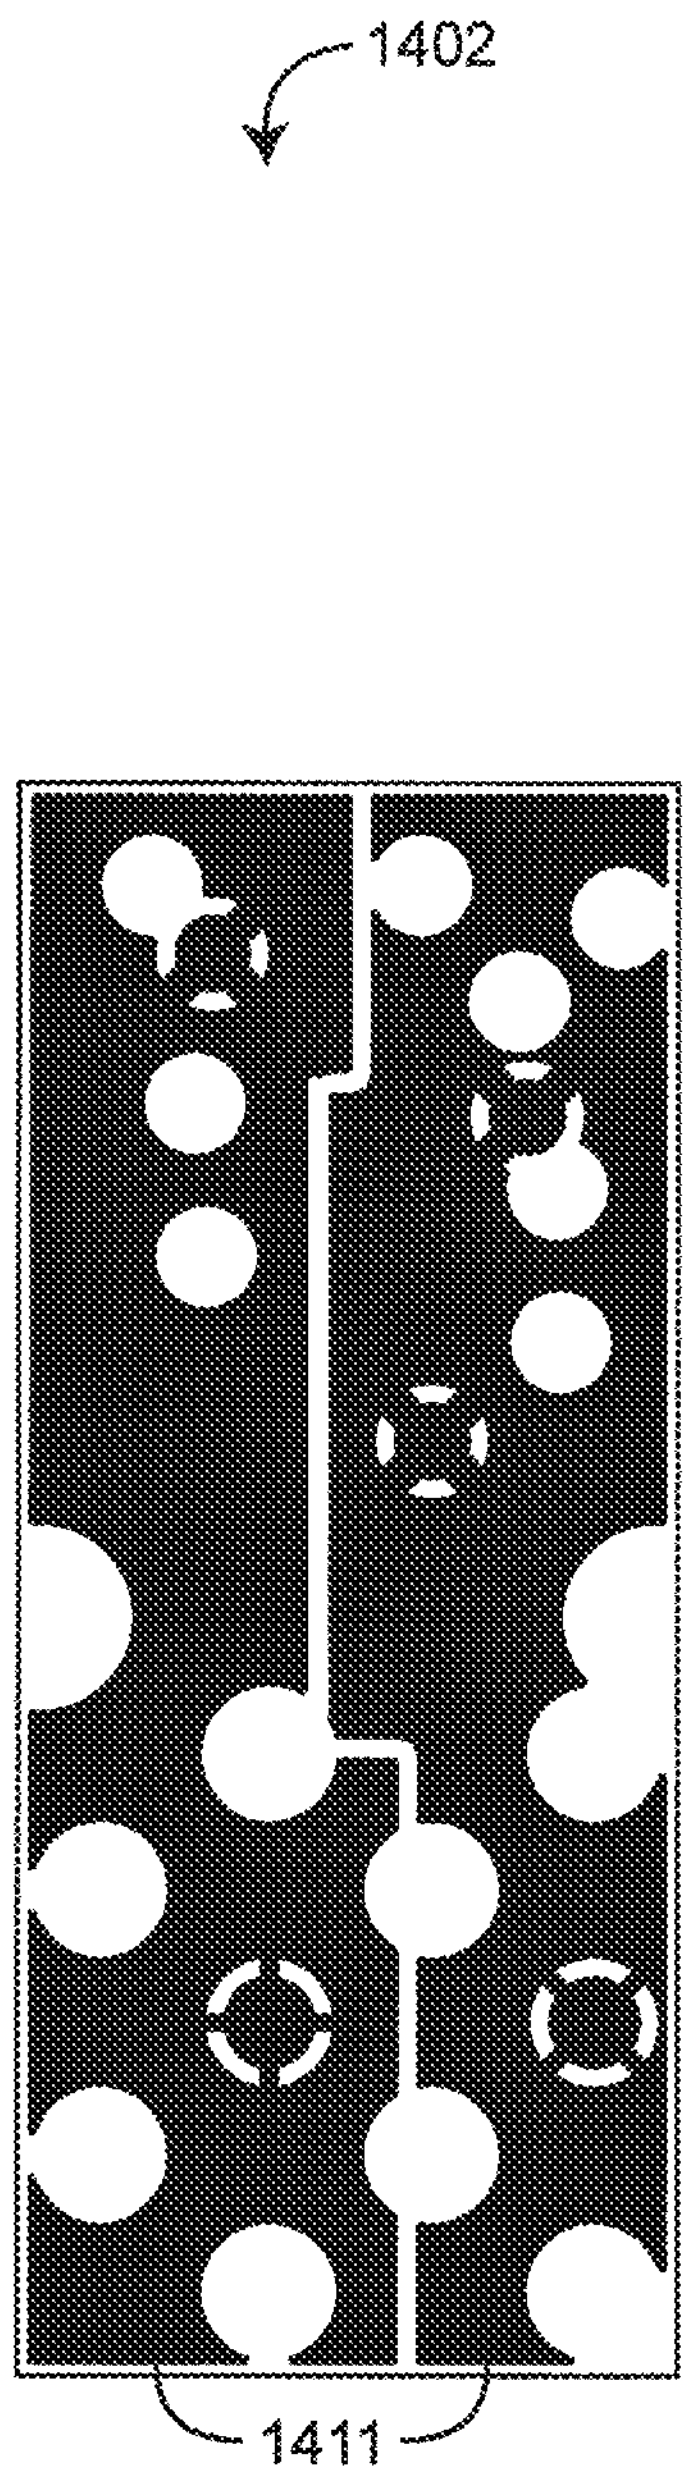

FIG. 18

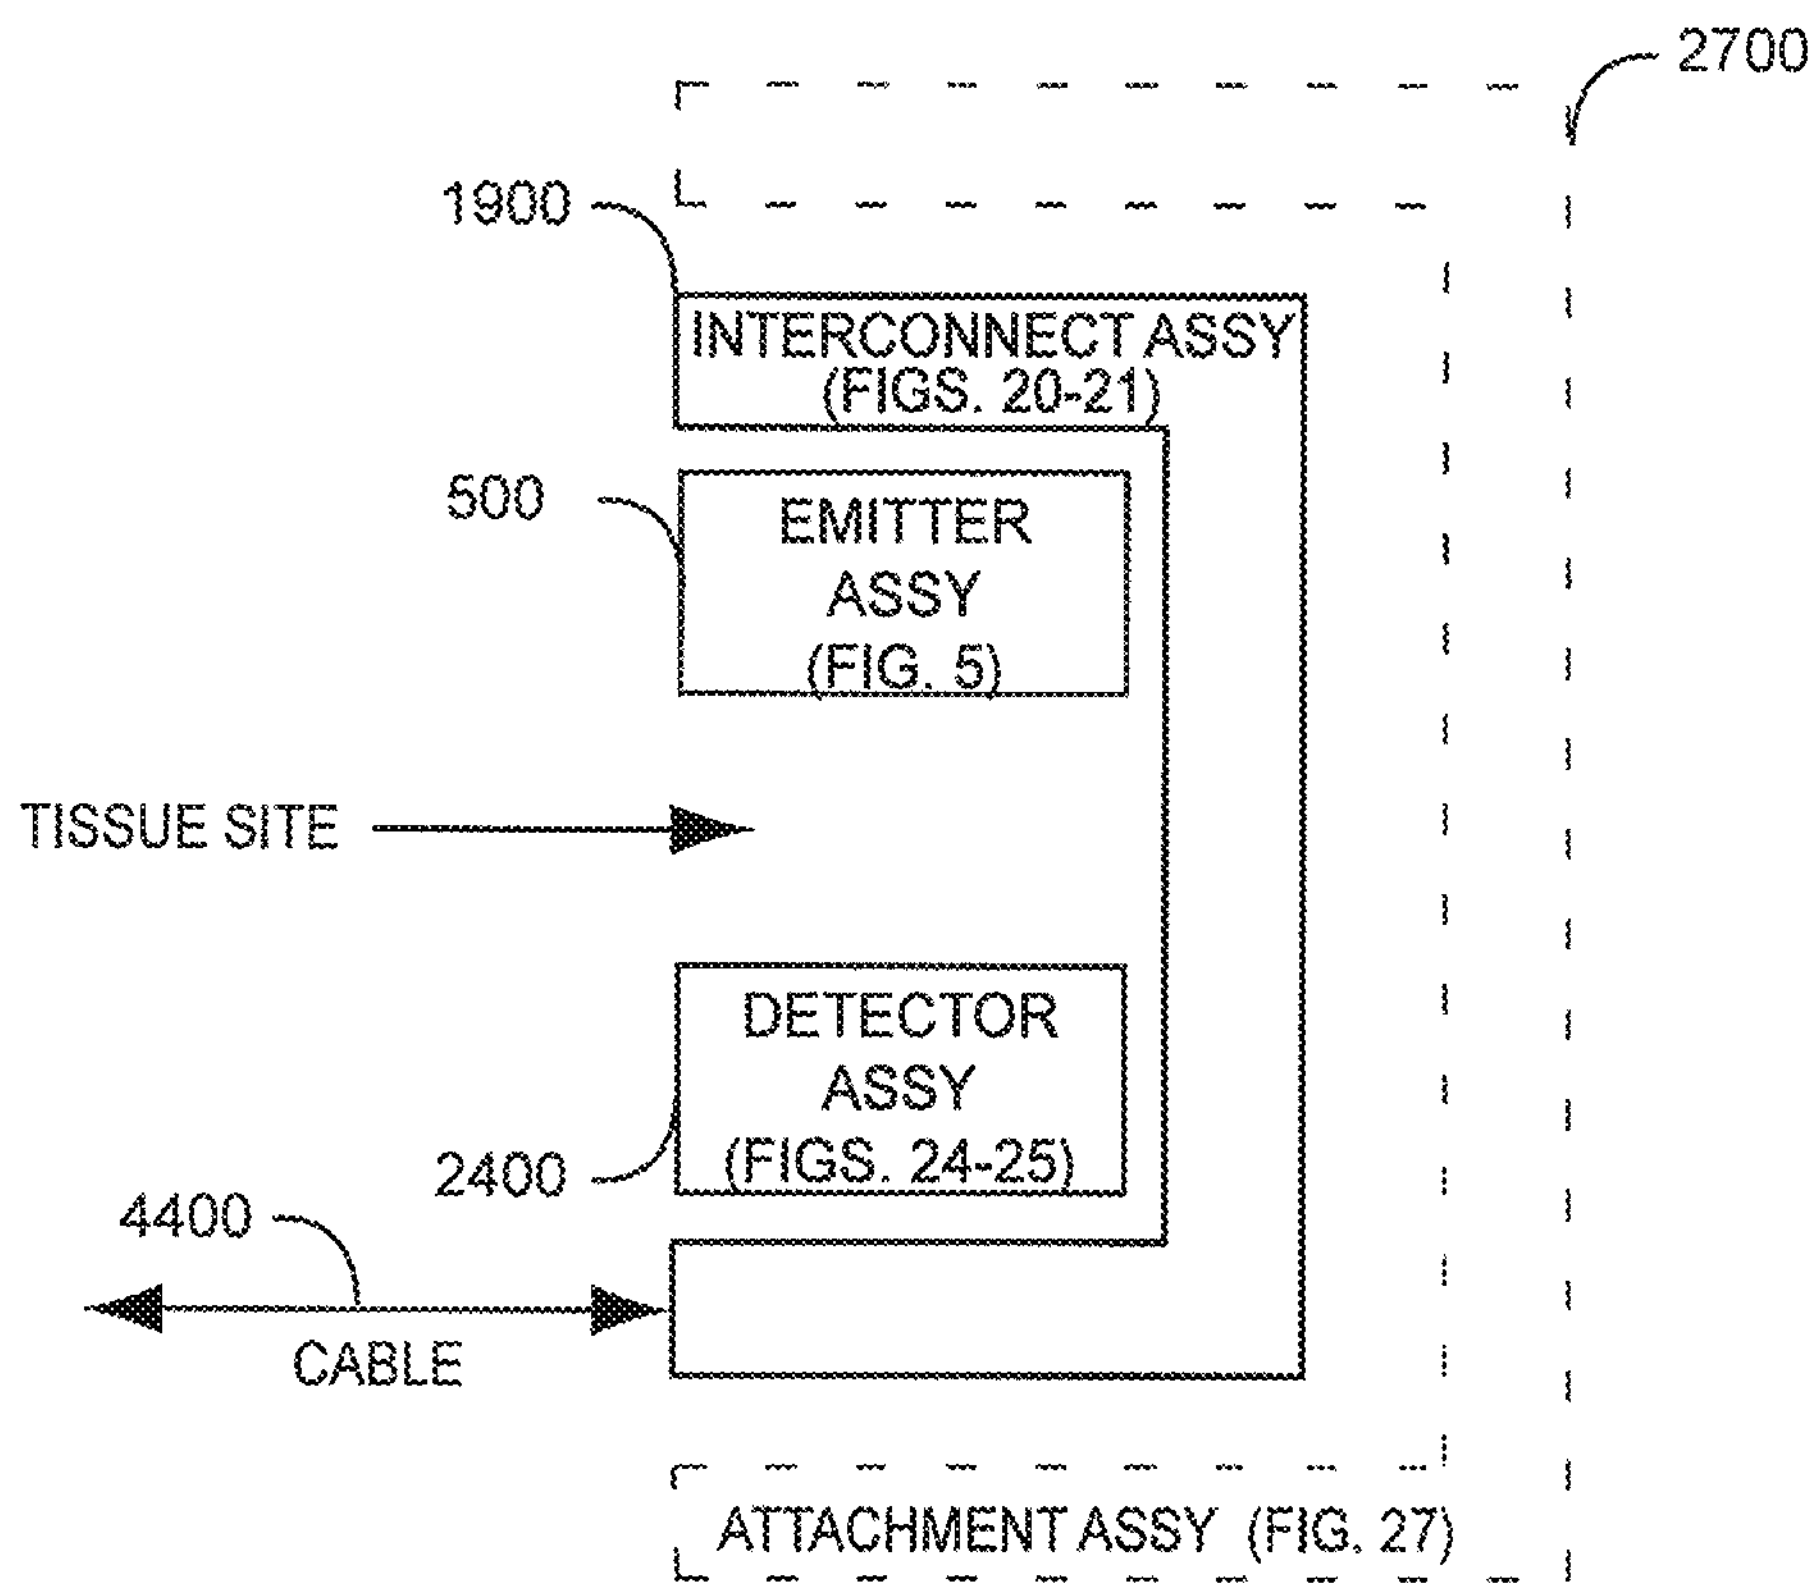
2700
1900
INTERCONNECT ASSY
(FIGS. 20-21)
500
EMITTER
ASSY
(FIG. 5)
TISSUE SITE
DETECTOR
ASSY
(FIGS. 24-25)
2400
4400
CABLE
ATTACHMENT ASSY (FIG. 27)

FIG. 19

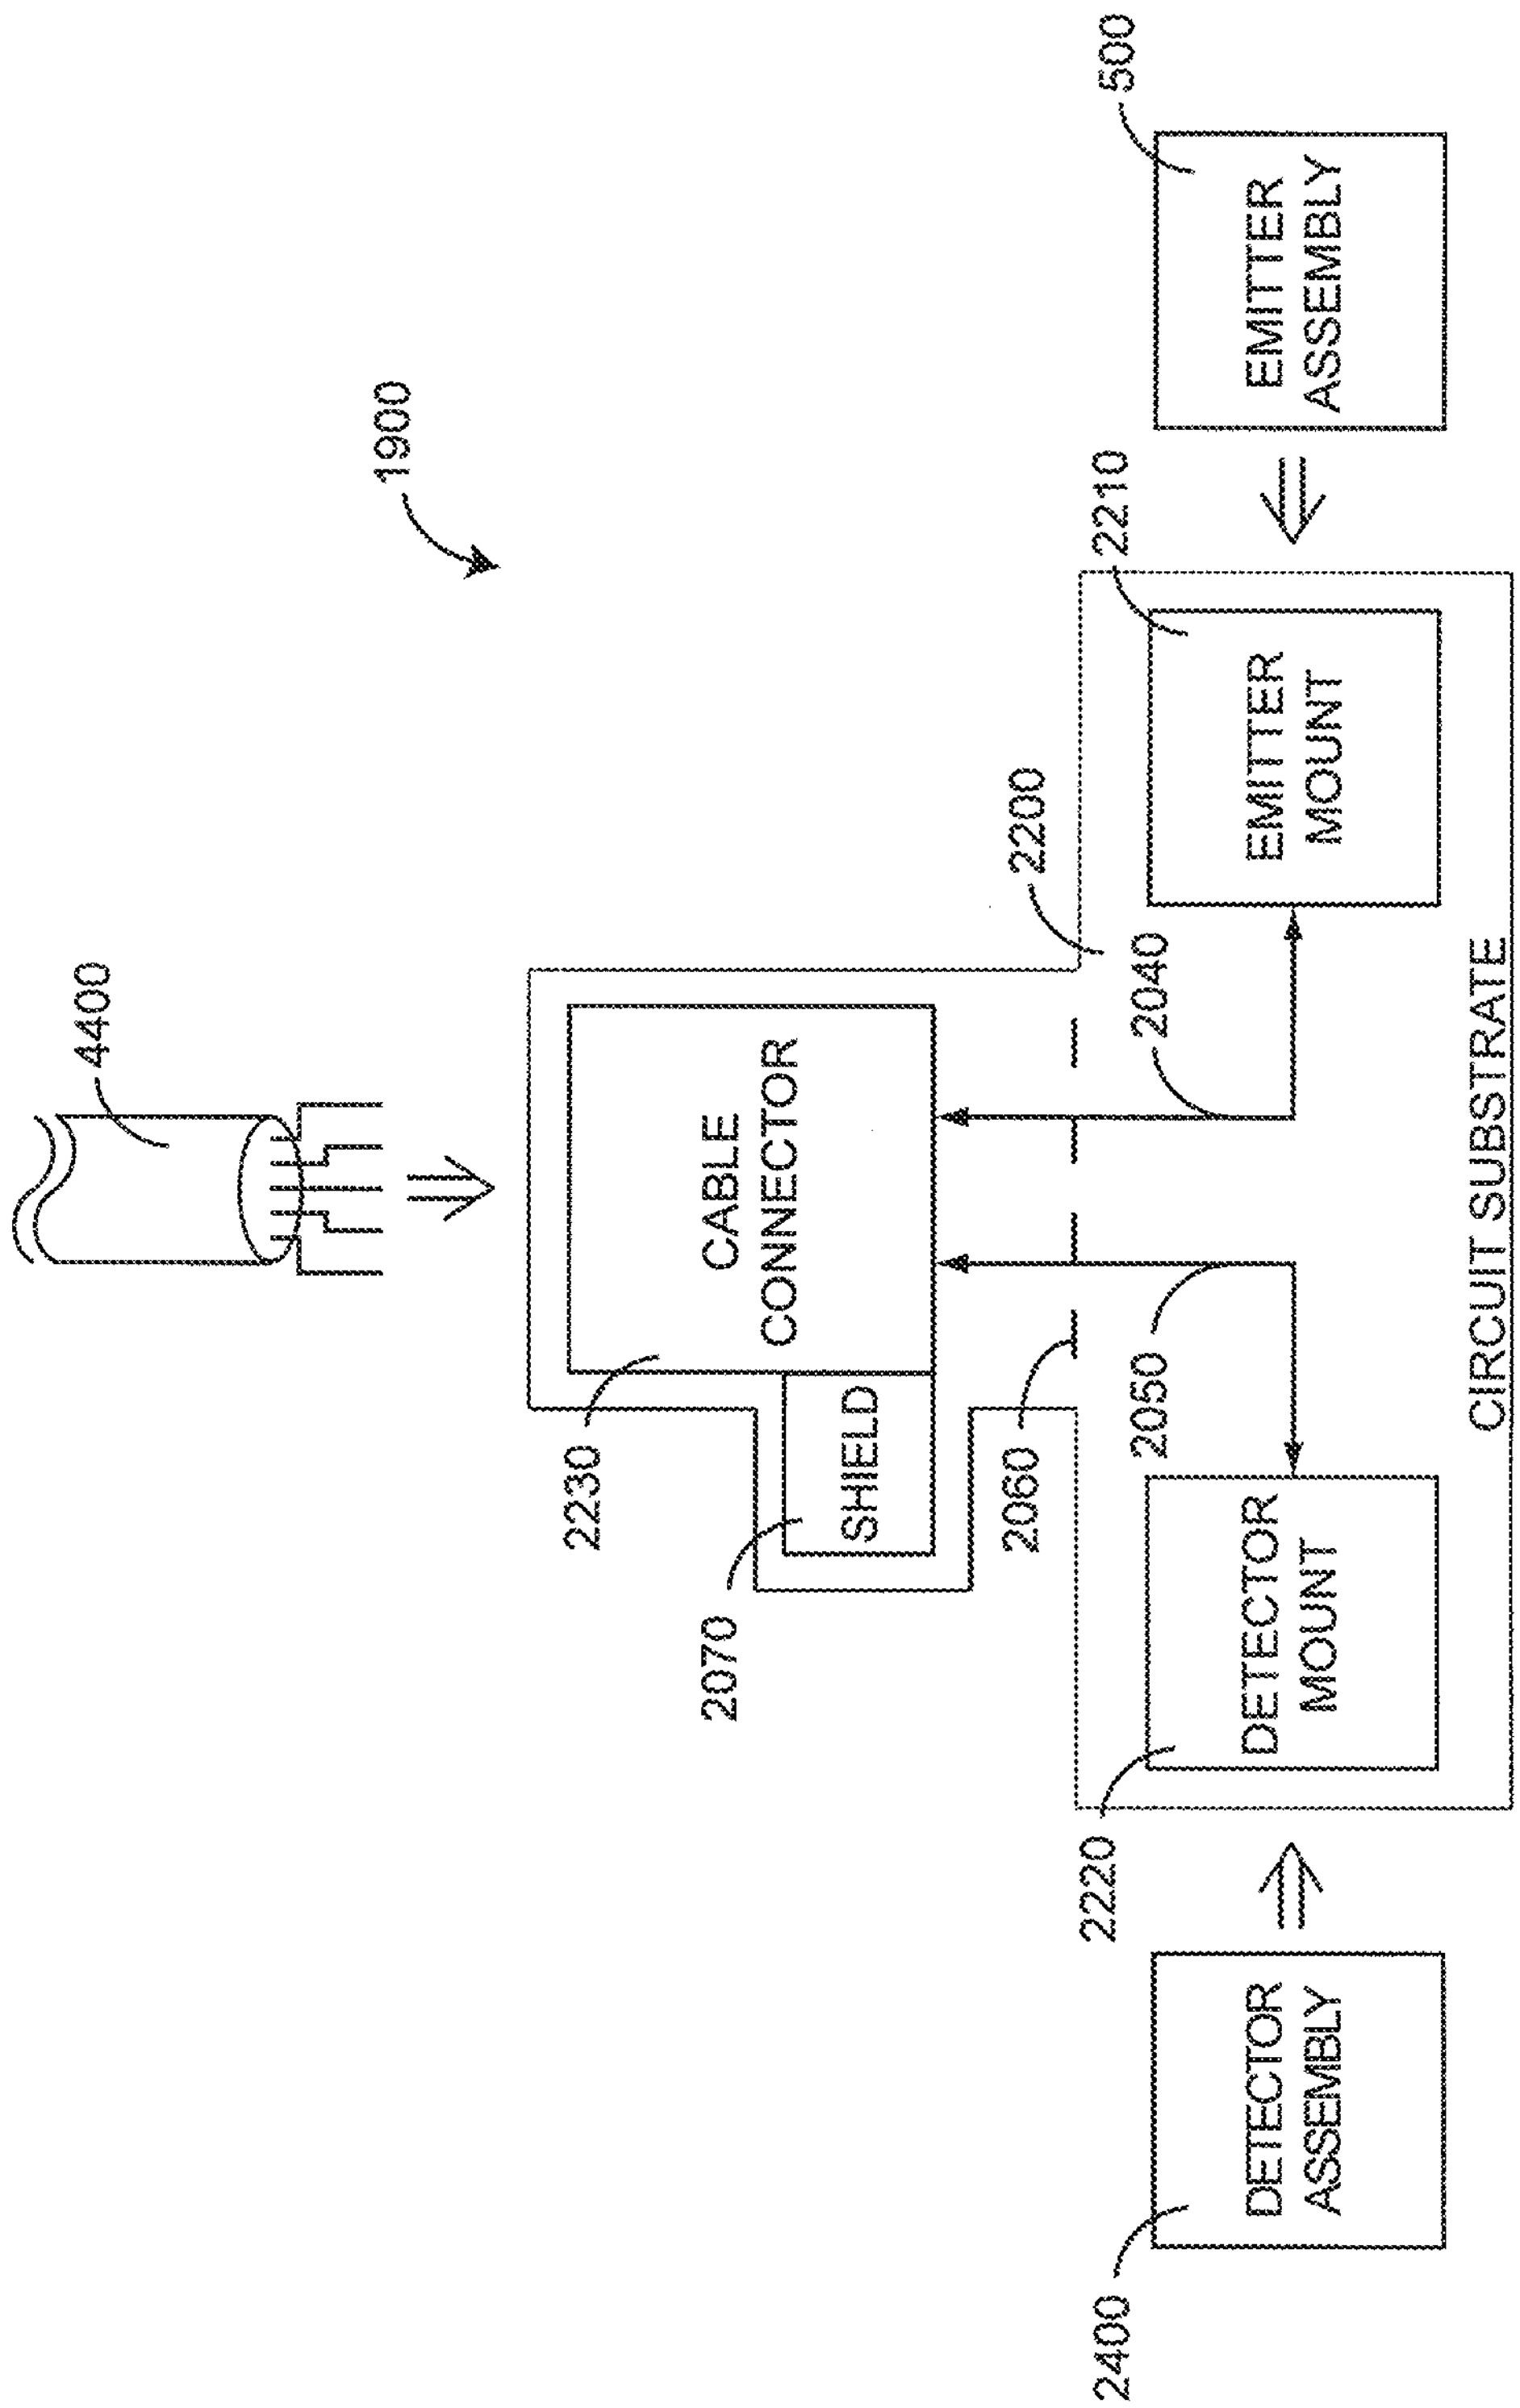
1900
500
EMITTER ASSEMBLY
2210
EMITTER MOUNT
2200
2040
4400
CABLE CONNECTOR
SHIELD
2230
2070
2060
2050
CIRCUIT SUBSTRATE
DETECTOR MOUNT
2220
DETECTOR ASSEMBLY
2400

FIG. 20

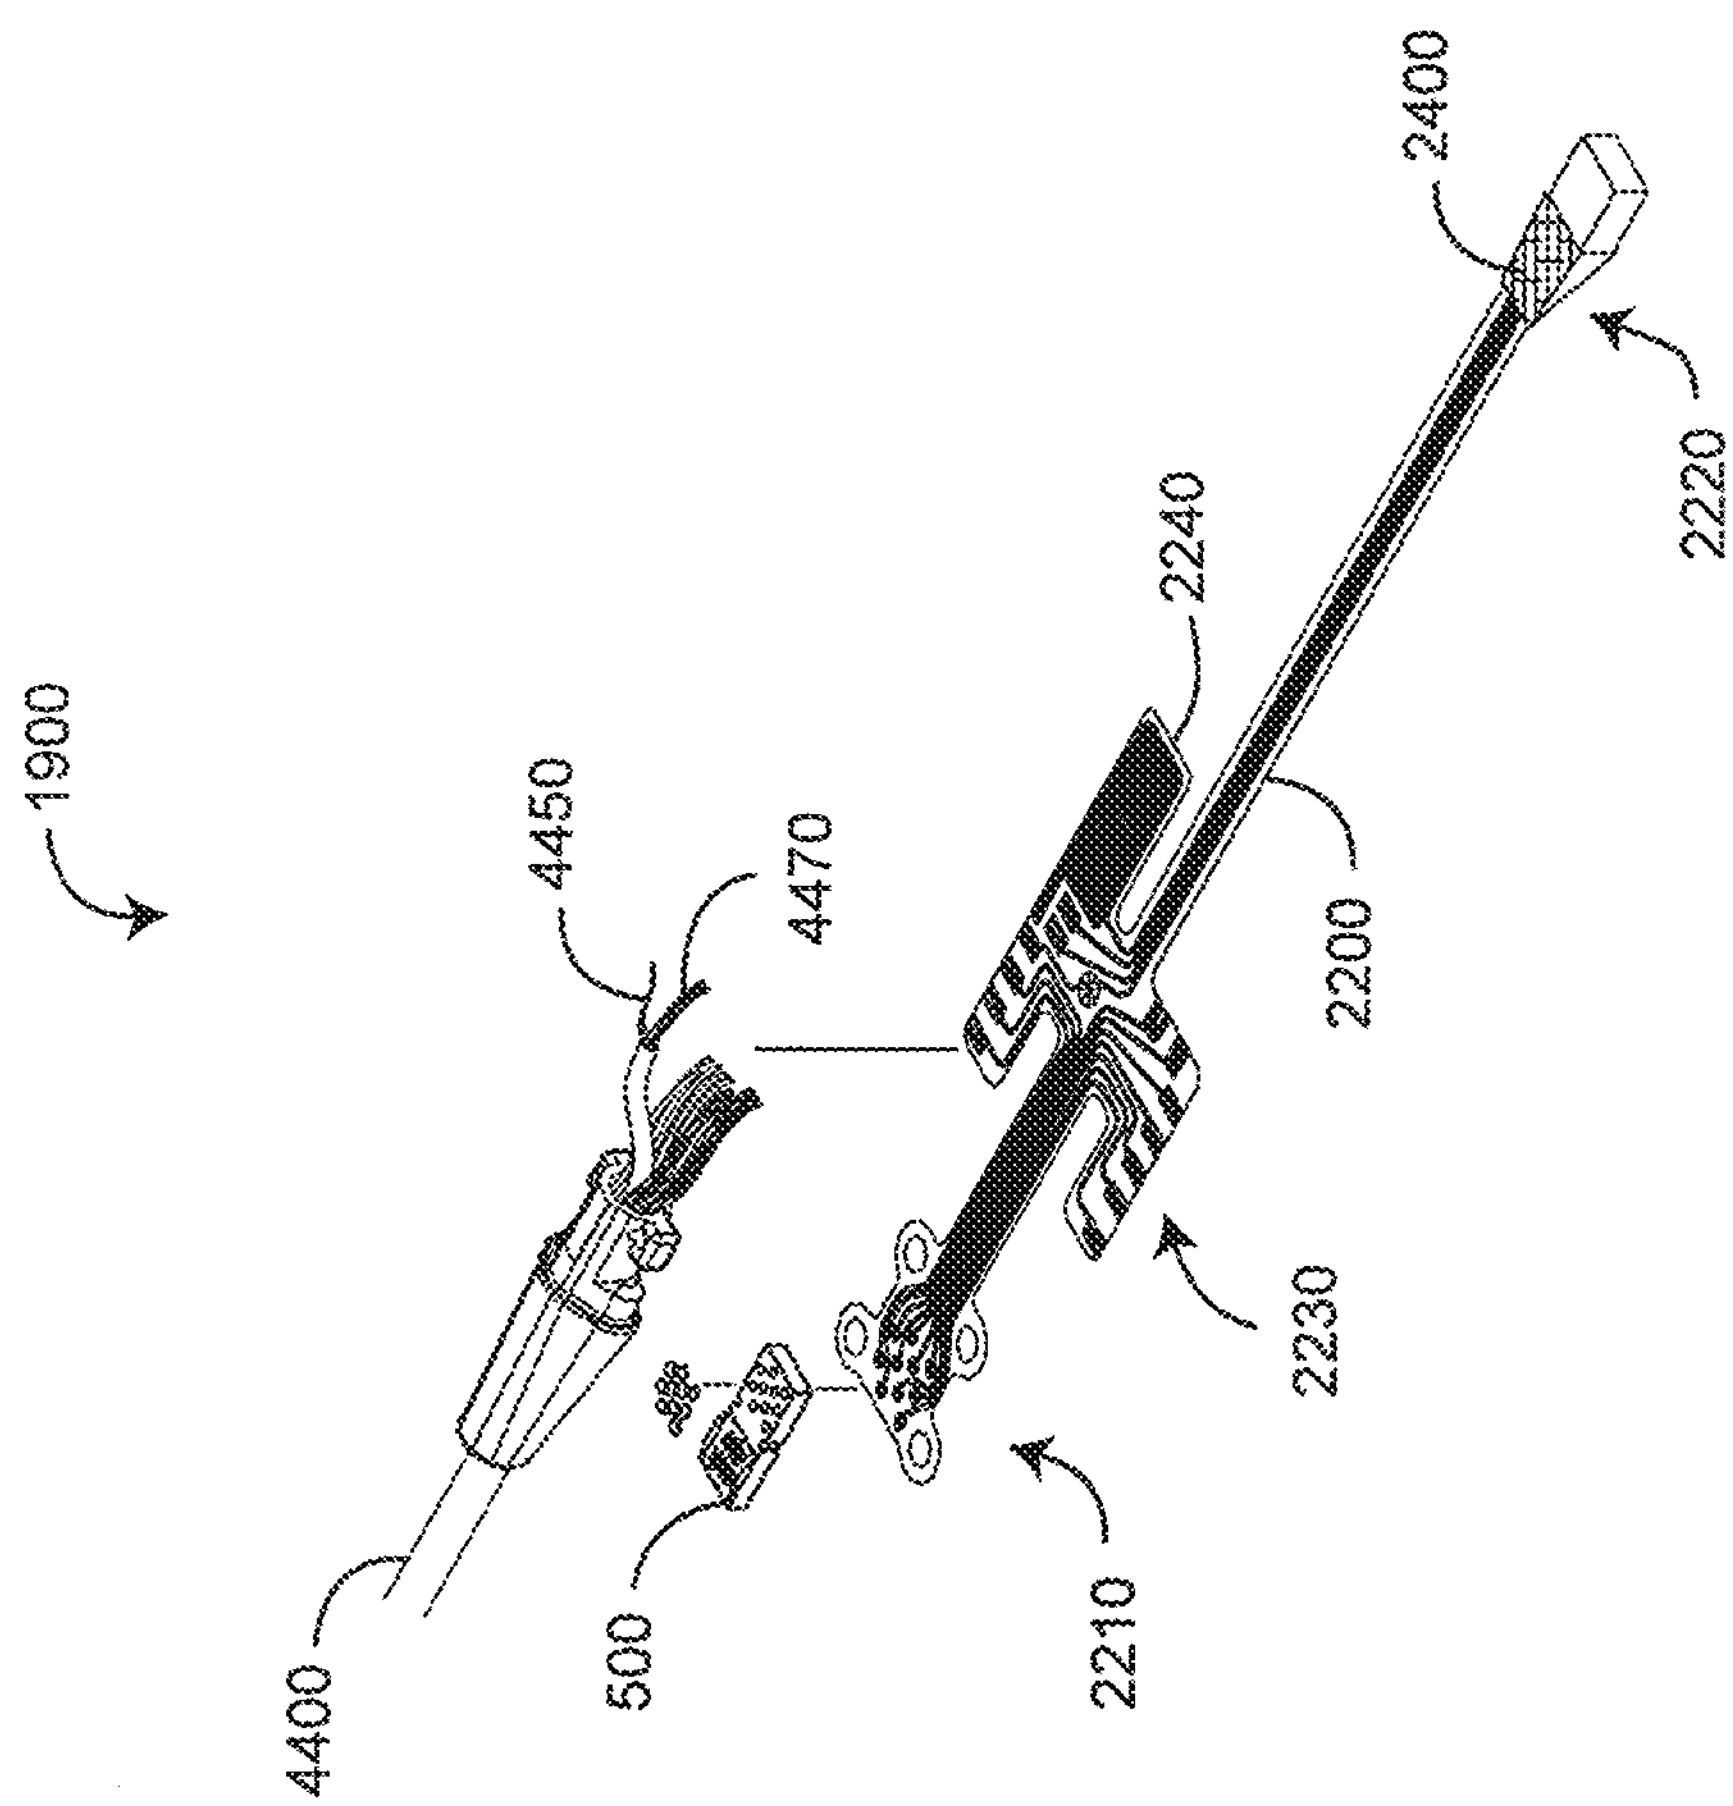

FIG. 21

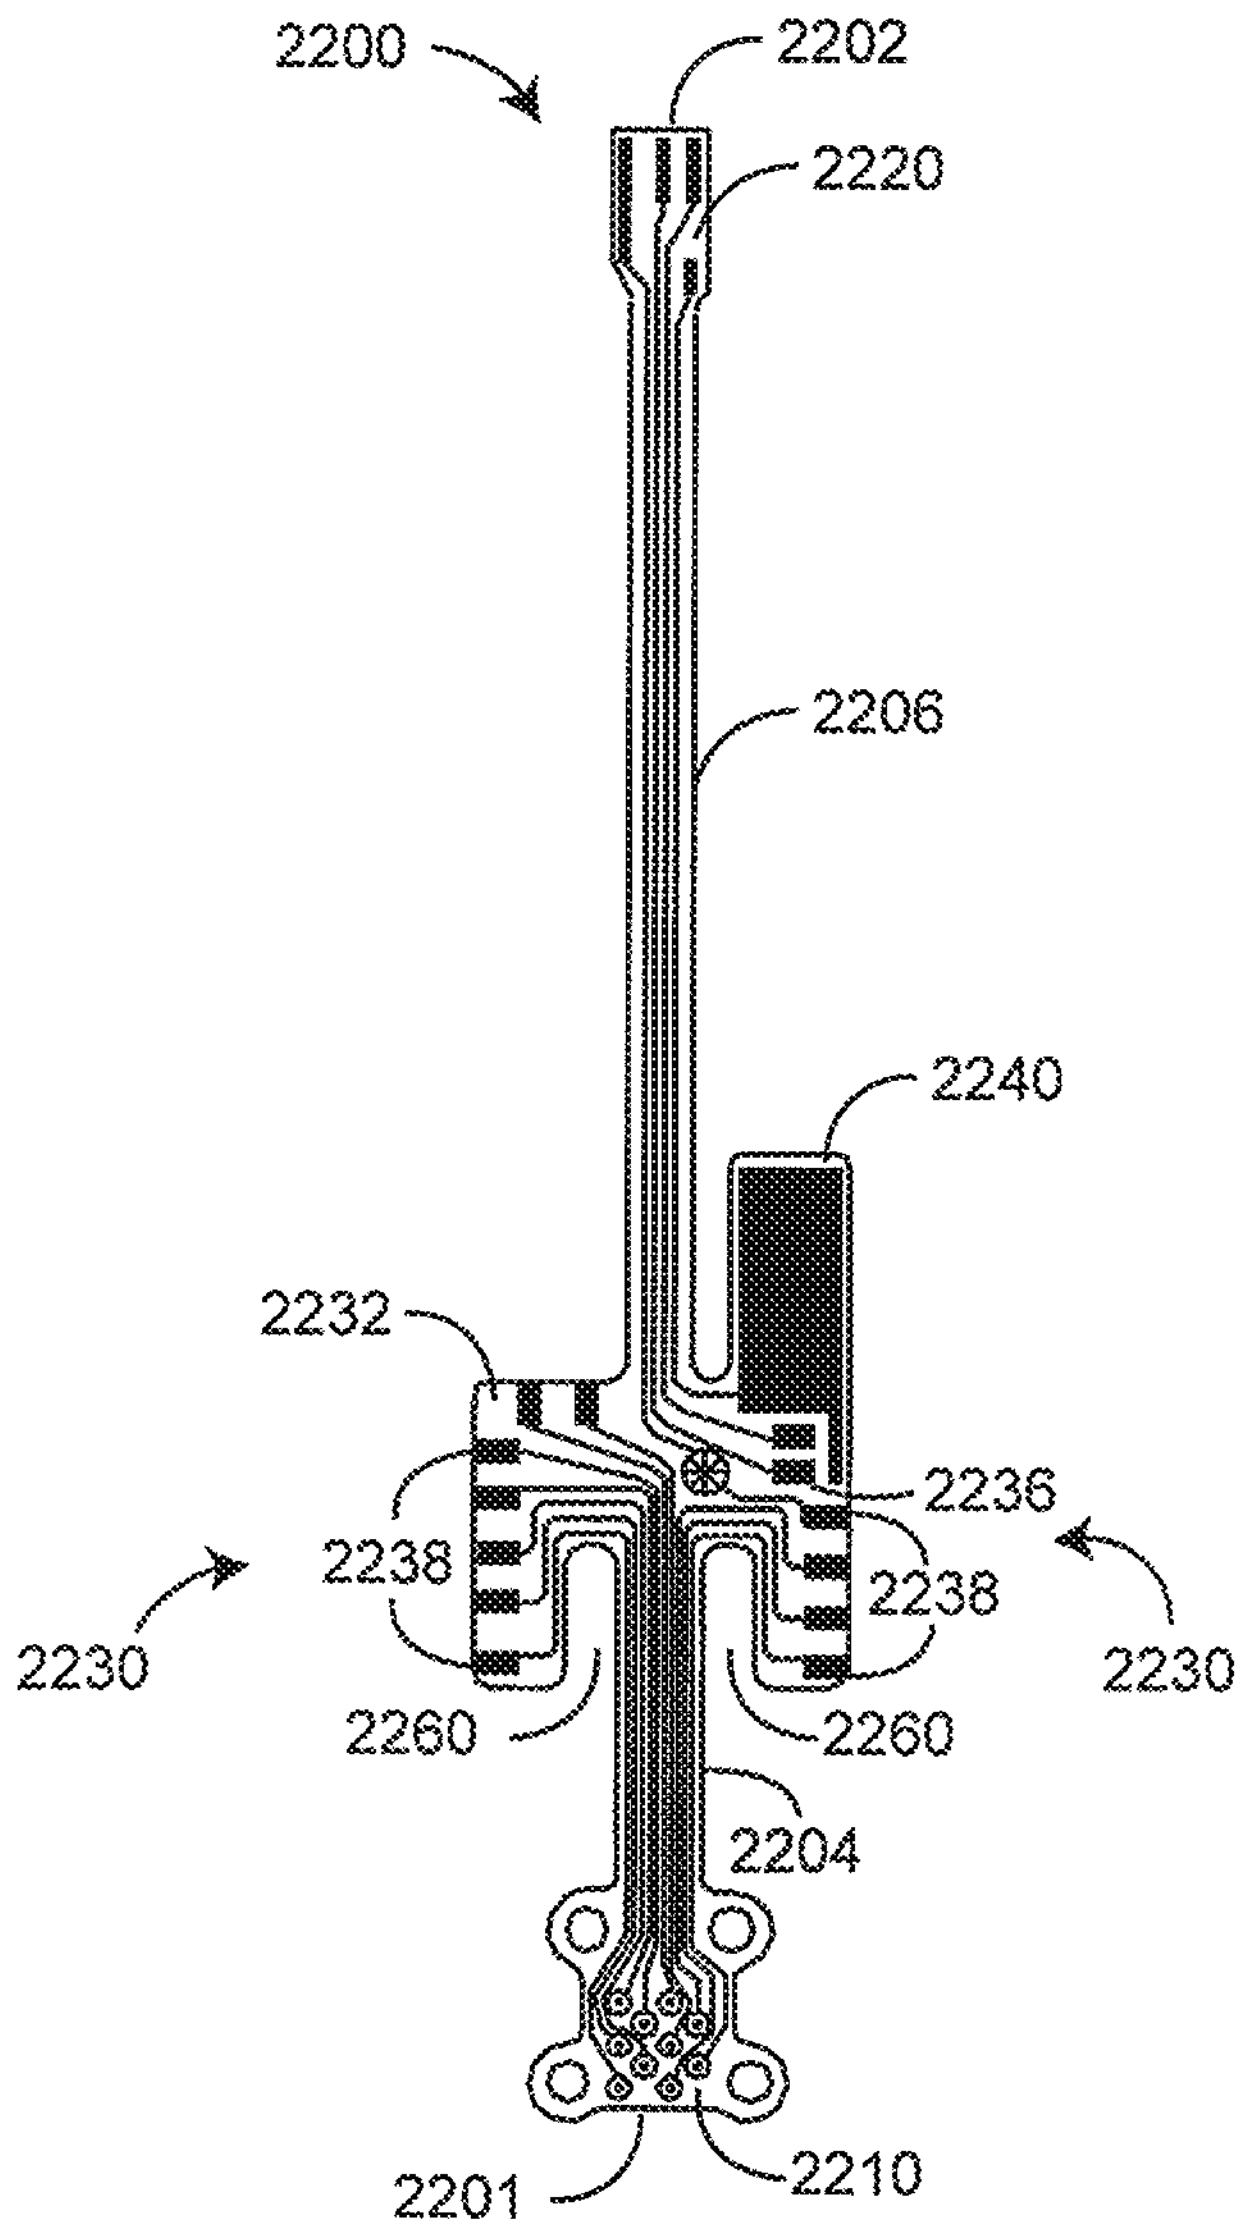
2200
2202
2220
2206
2240
2232
2236
2238
2238
2230
2230
2260
2260
2204
2201
2210

FIG. 22

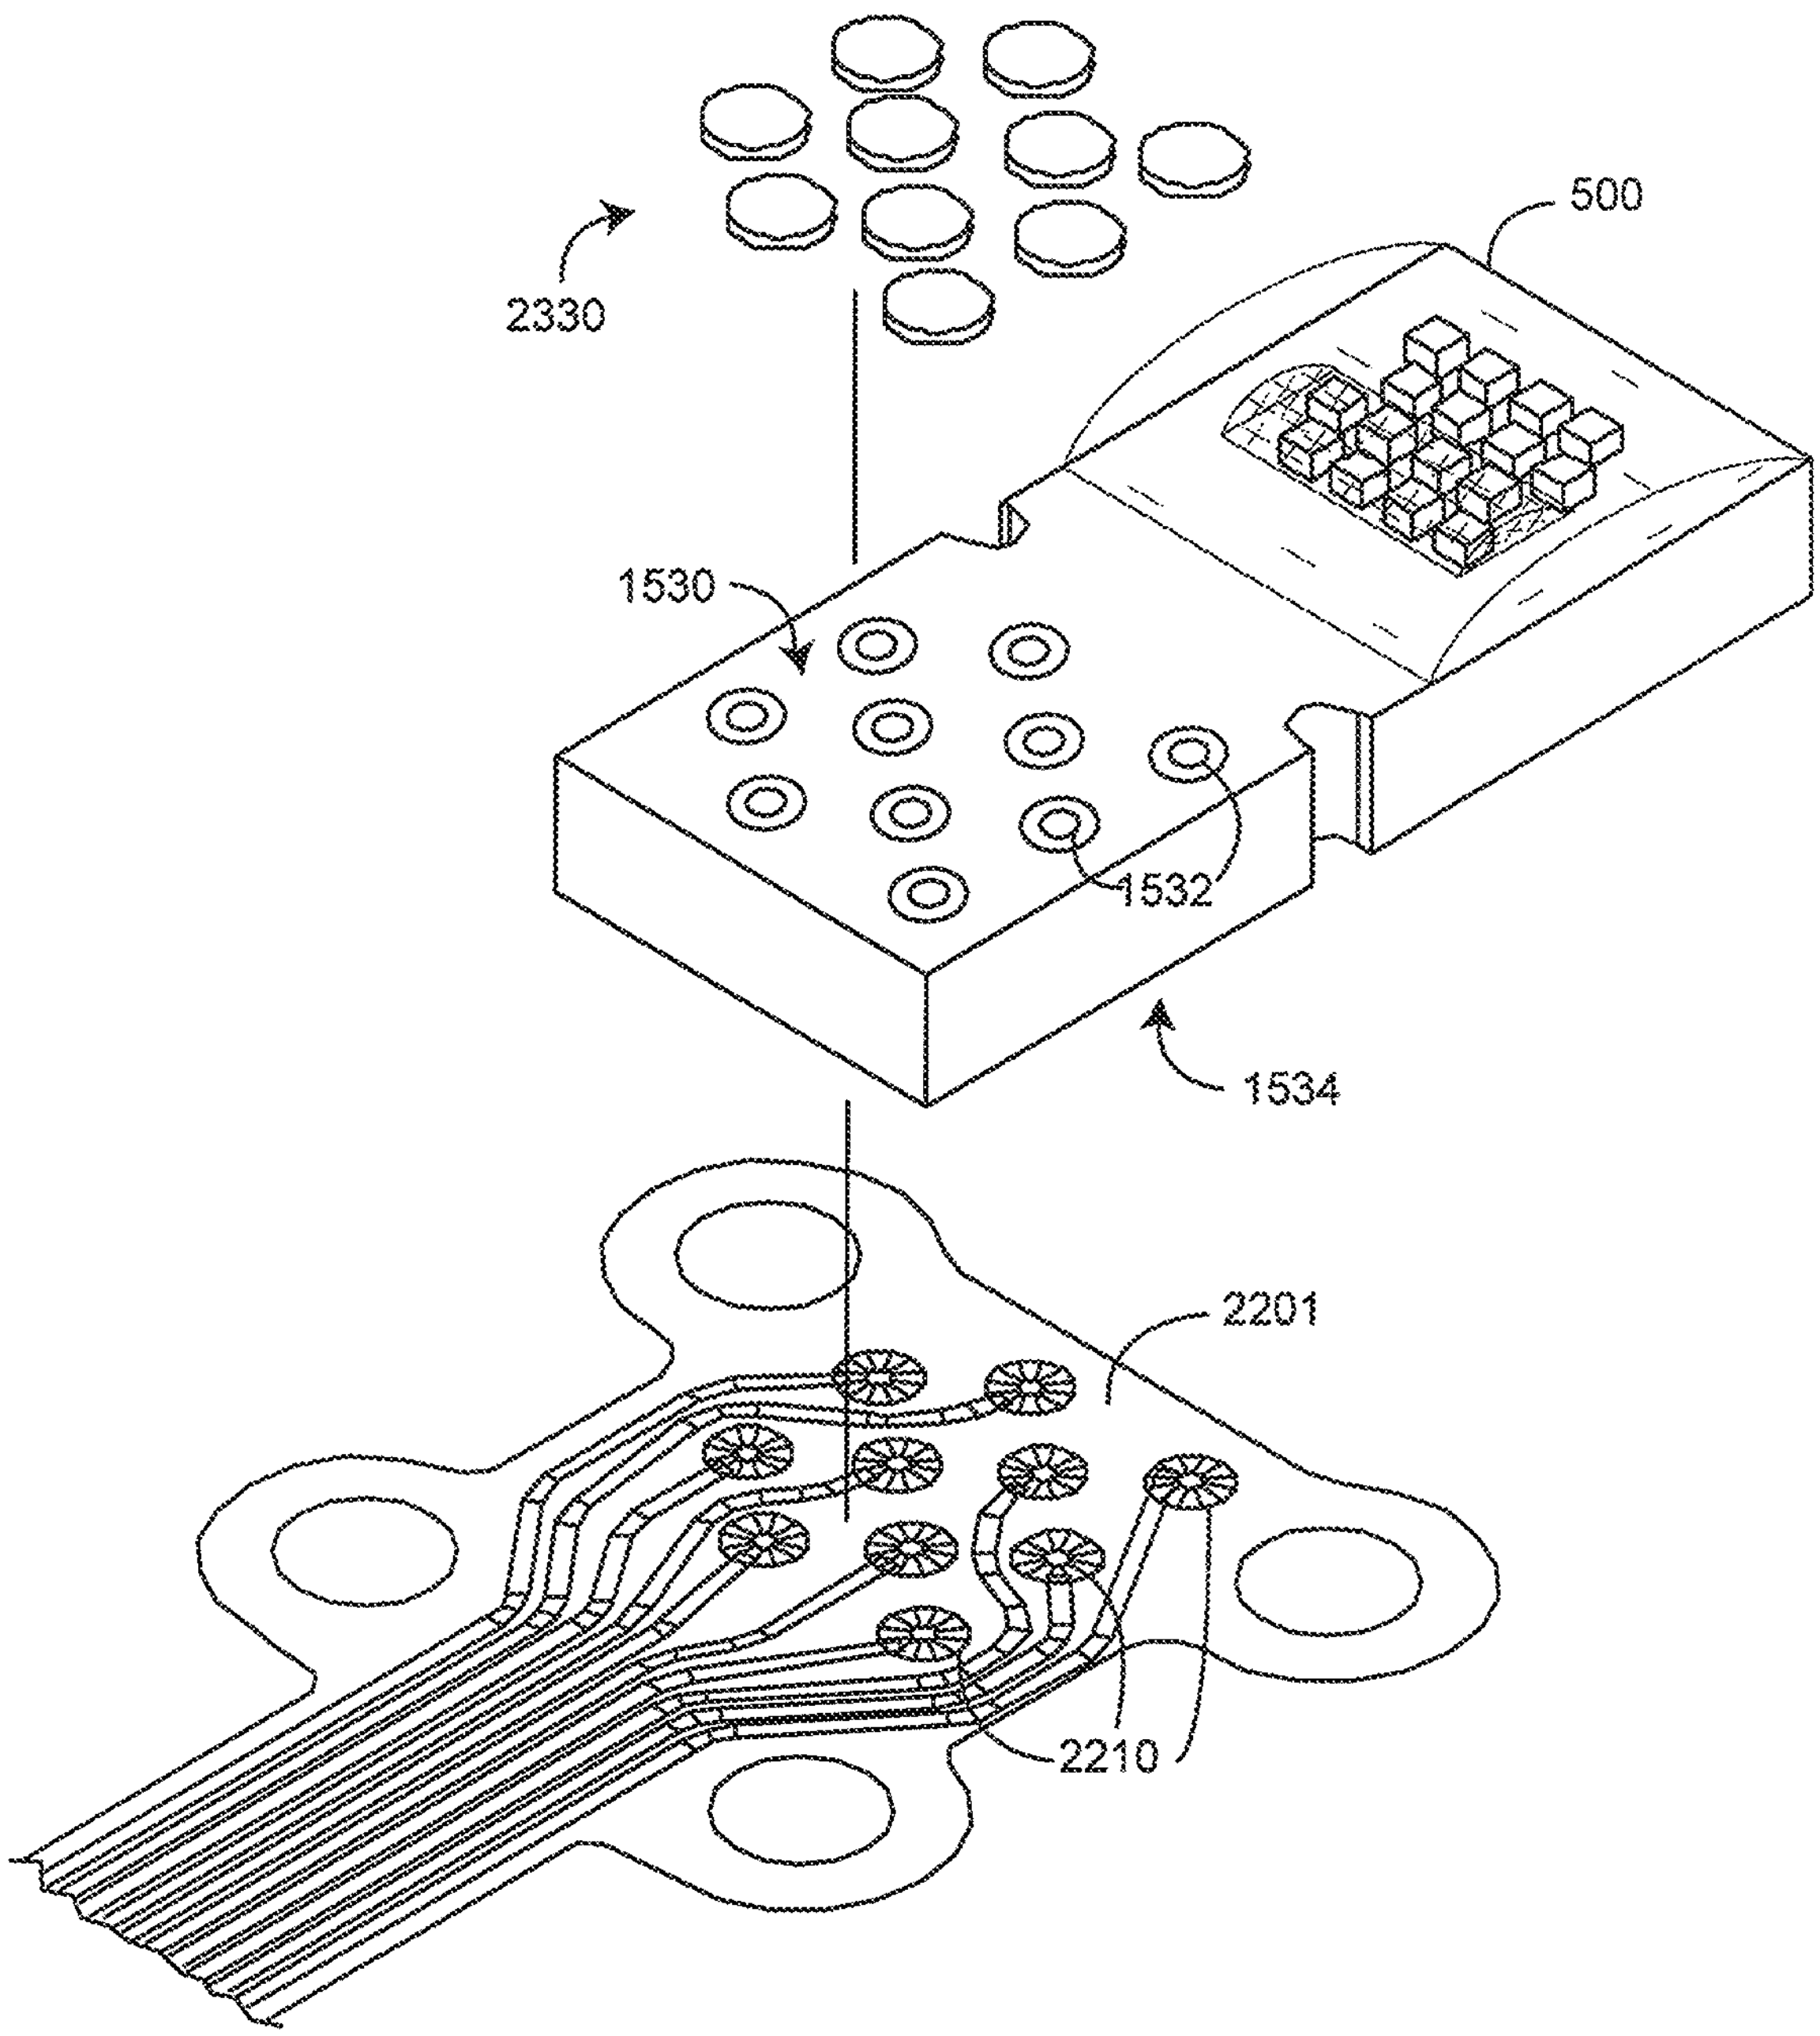

FIG. 23

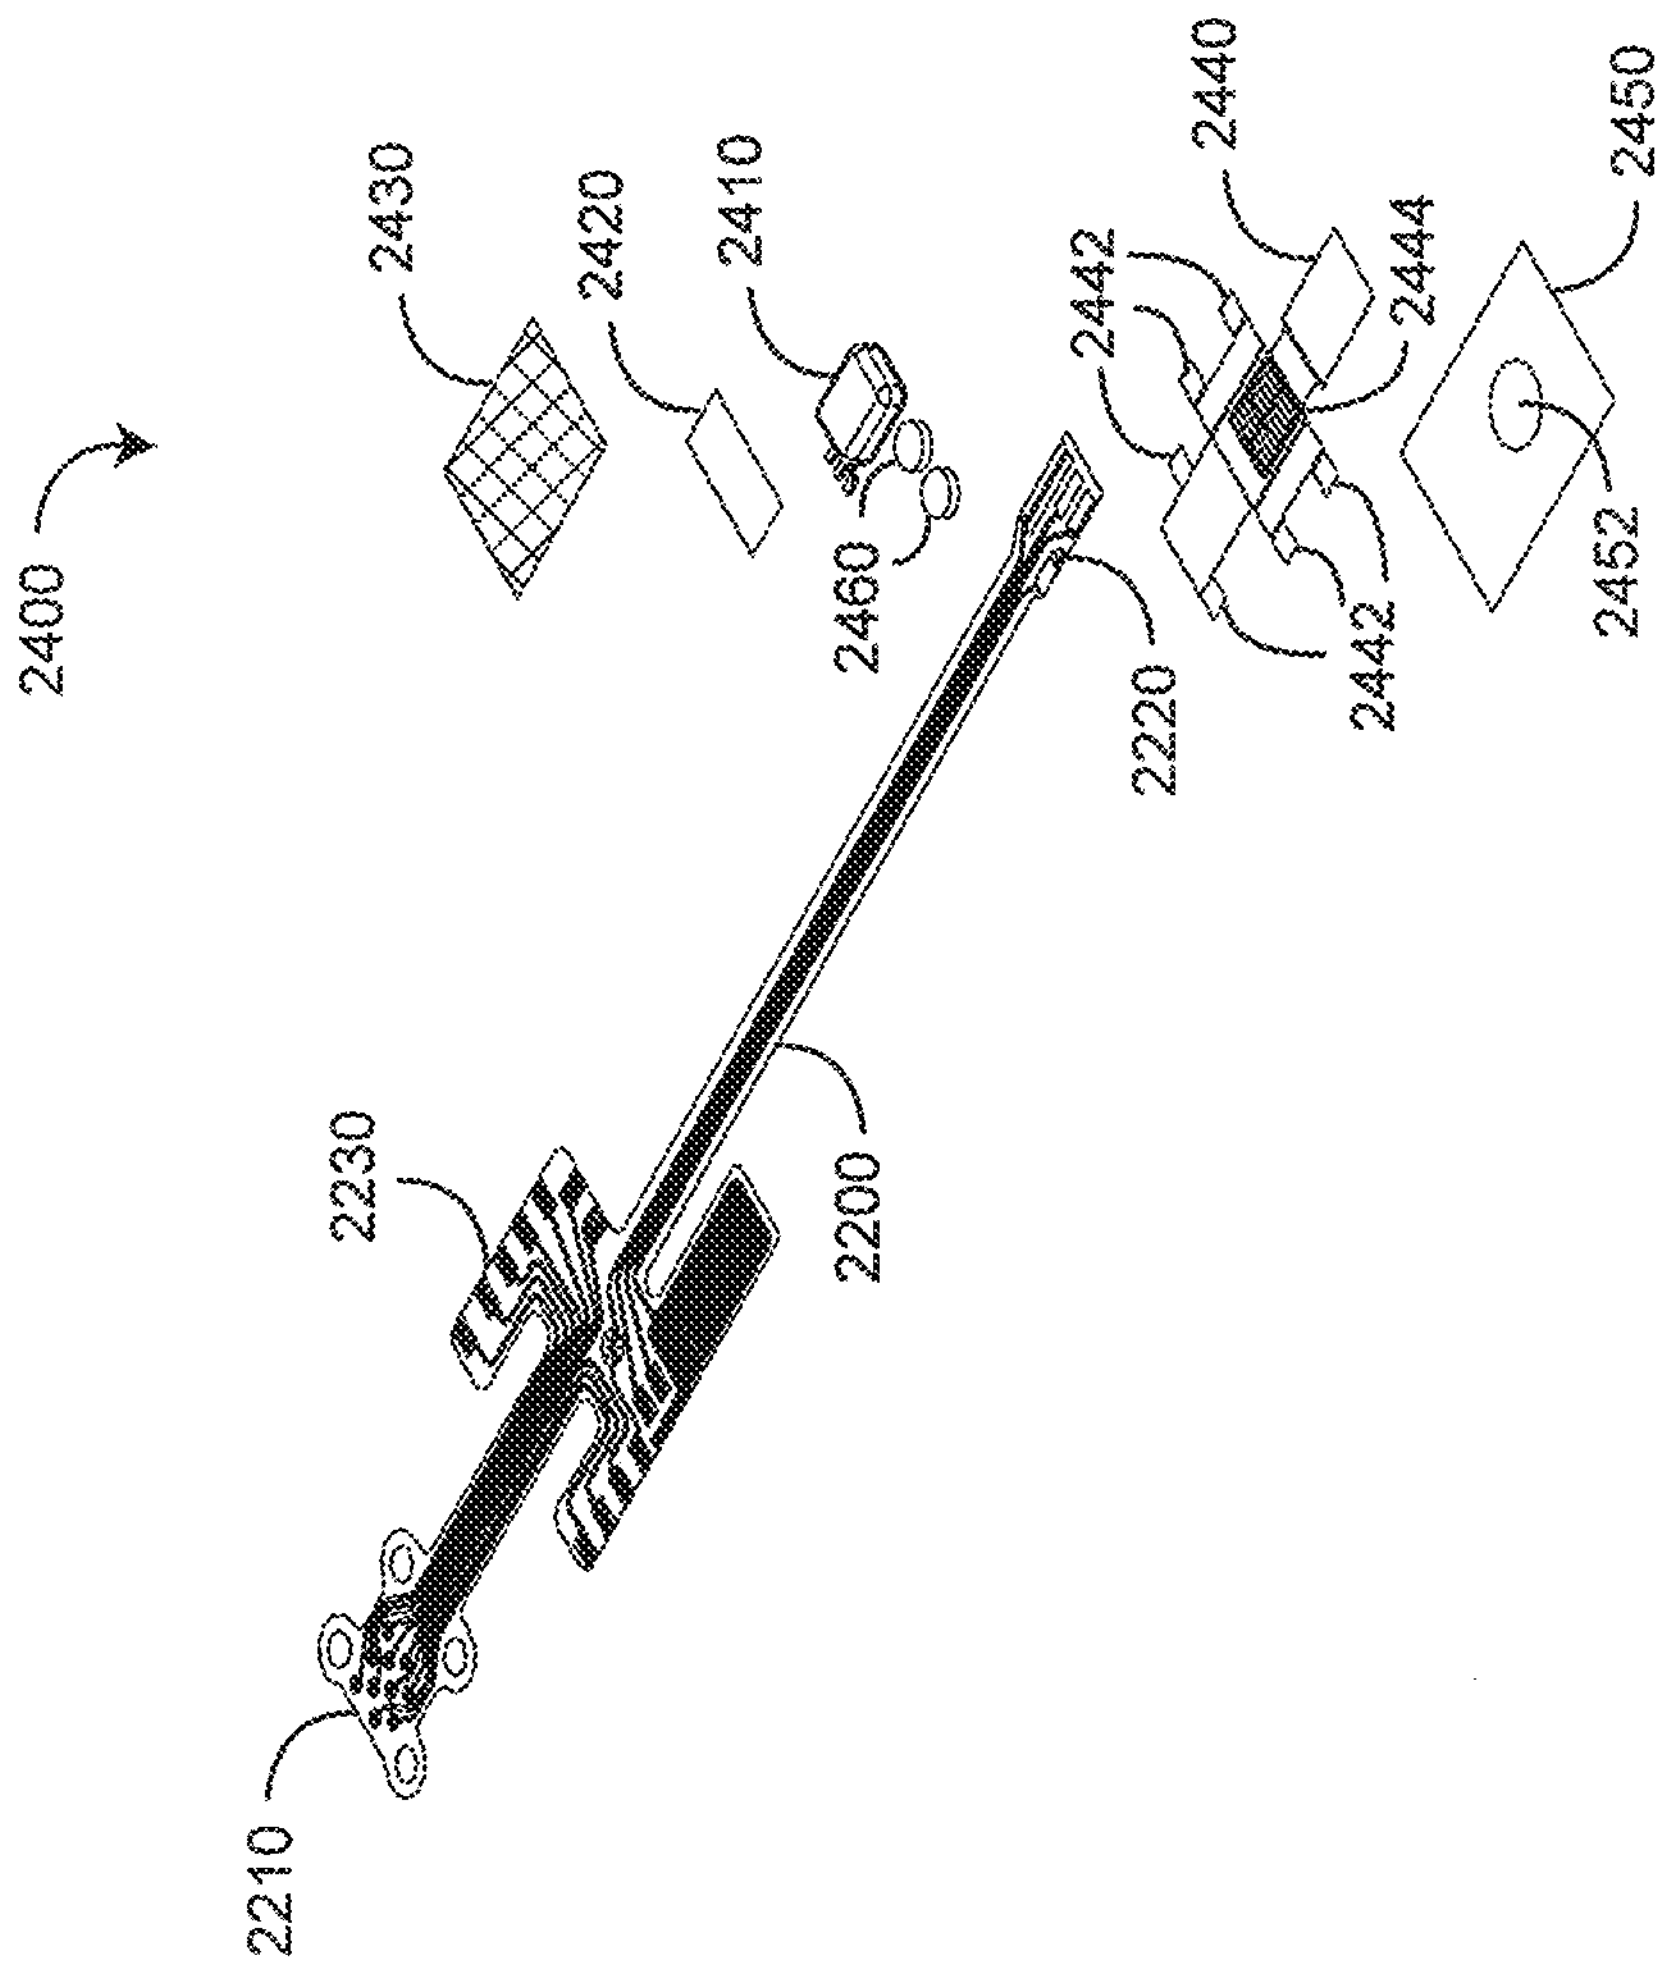
2400
2430
2420
2410
2460
2440
2442
2444
2442
2450
2452
2220
2230
2200
2210

FIG. 24

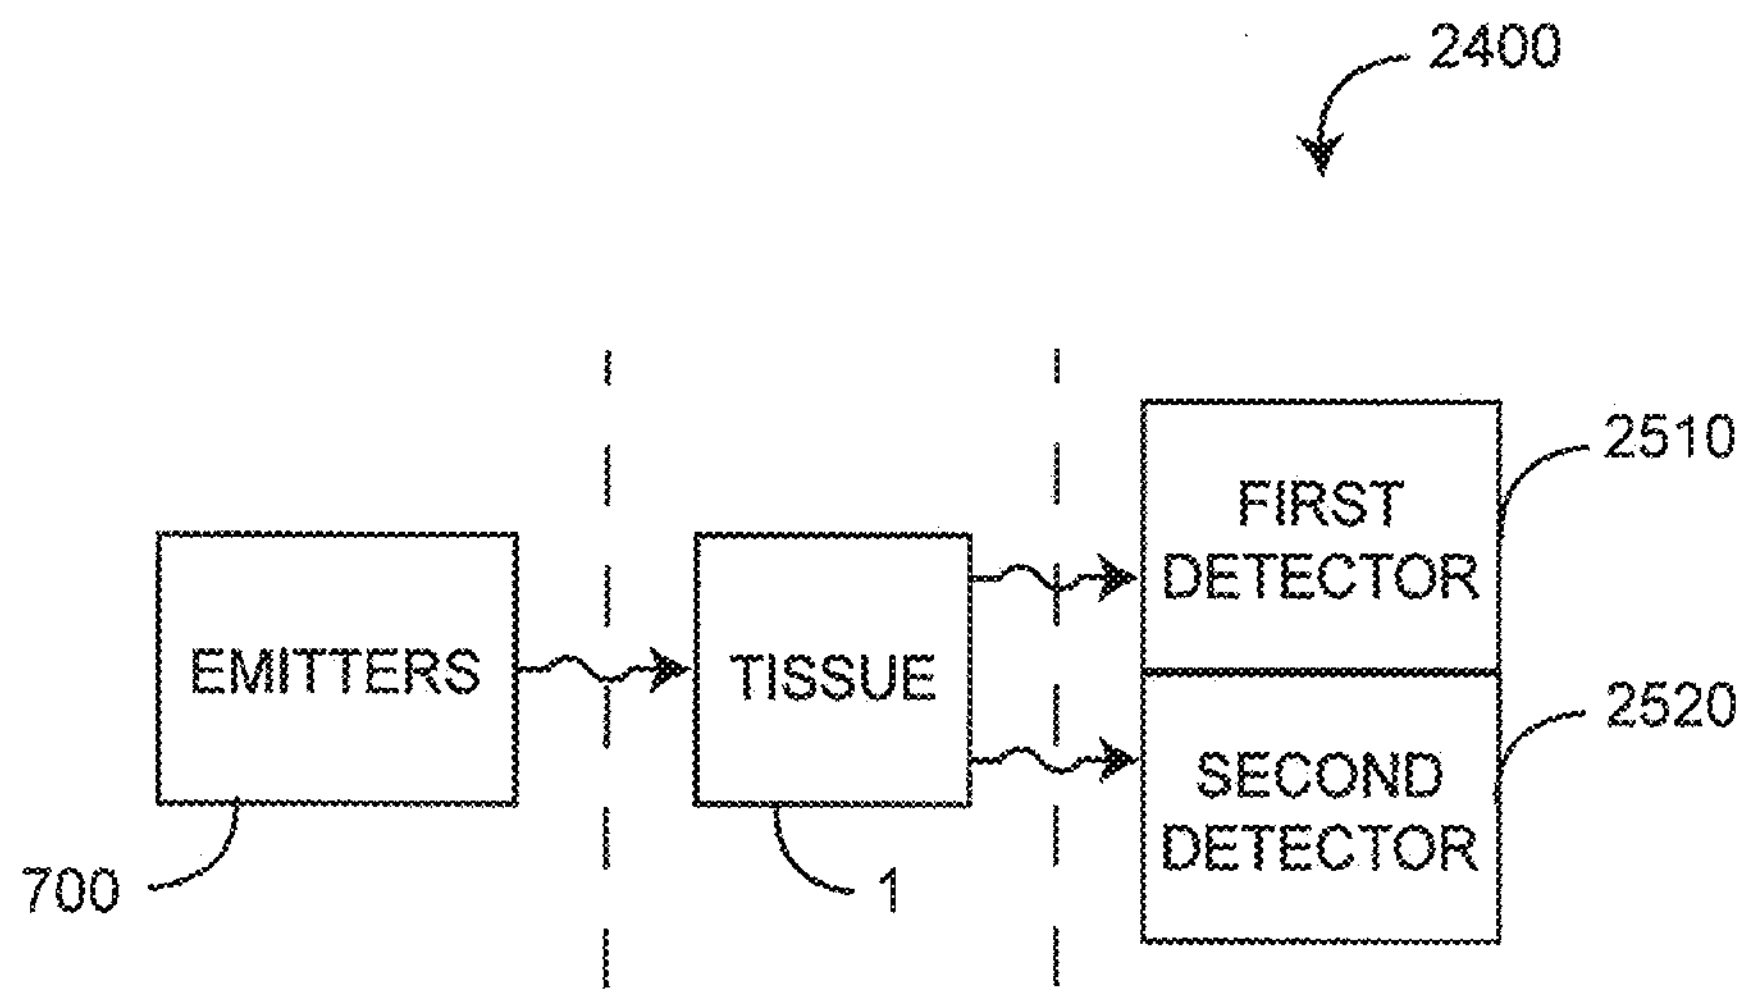
2400
2510
2520
FIRST
DETECTOR
SECOND
DETECTOR
EMITTERS
TISSUE
700
1

FIG. 25

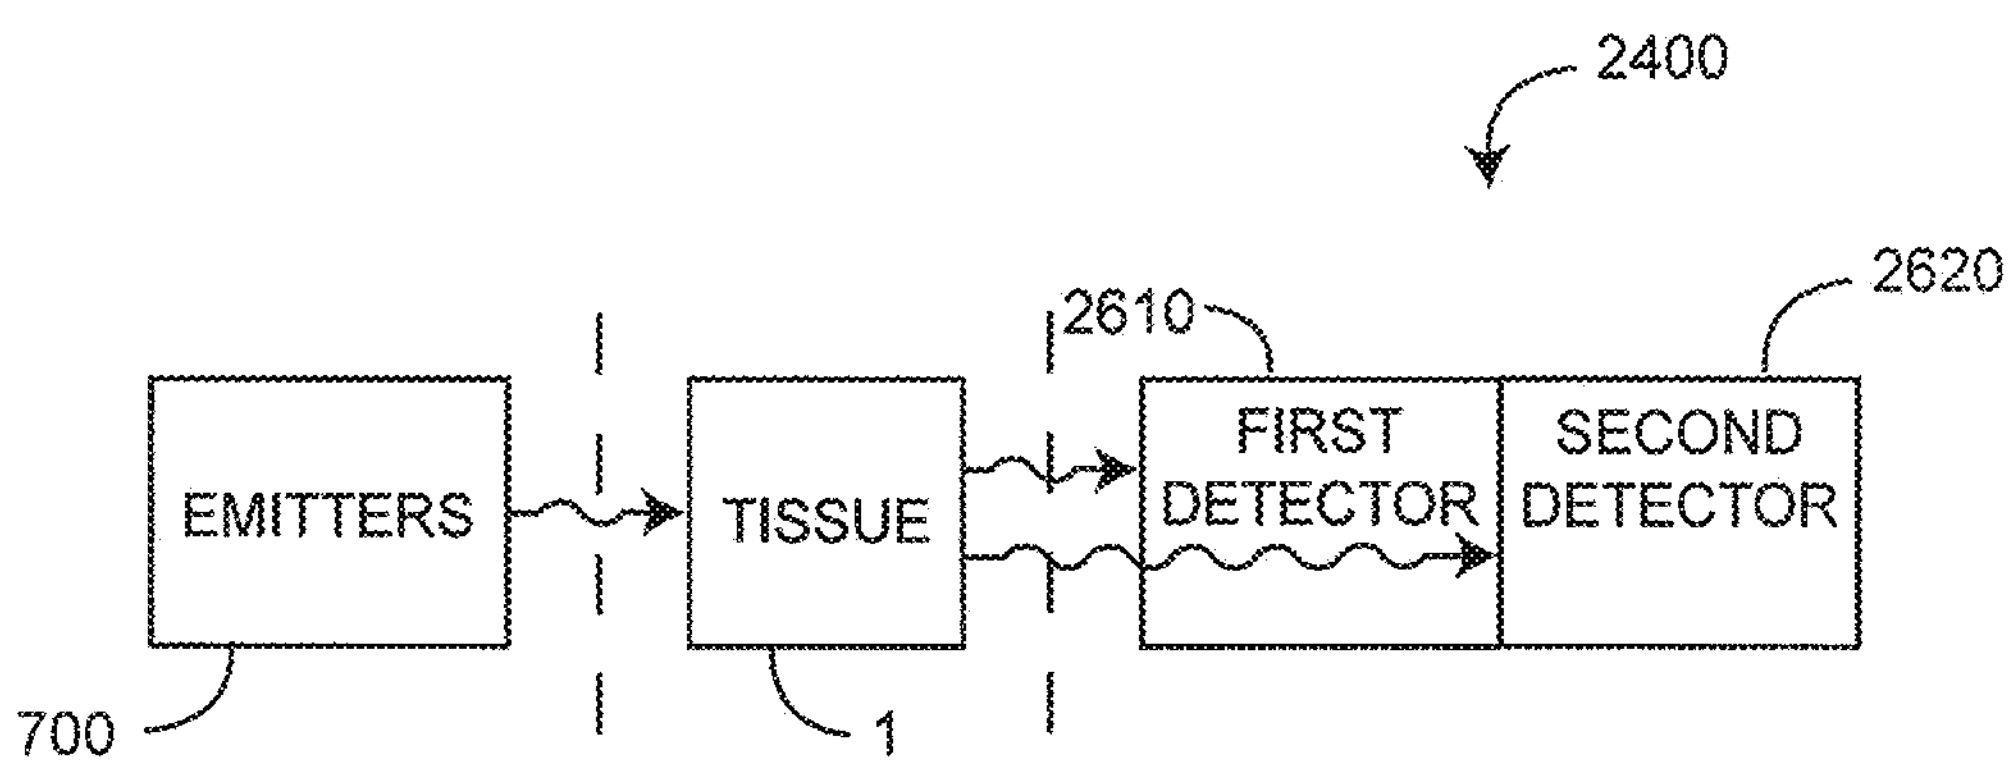
2400
2610
2620
FIRST
DETECTOR
SECOND
DETECTOR
EMITTERS
TISSUE
700
1

FIG. 26

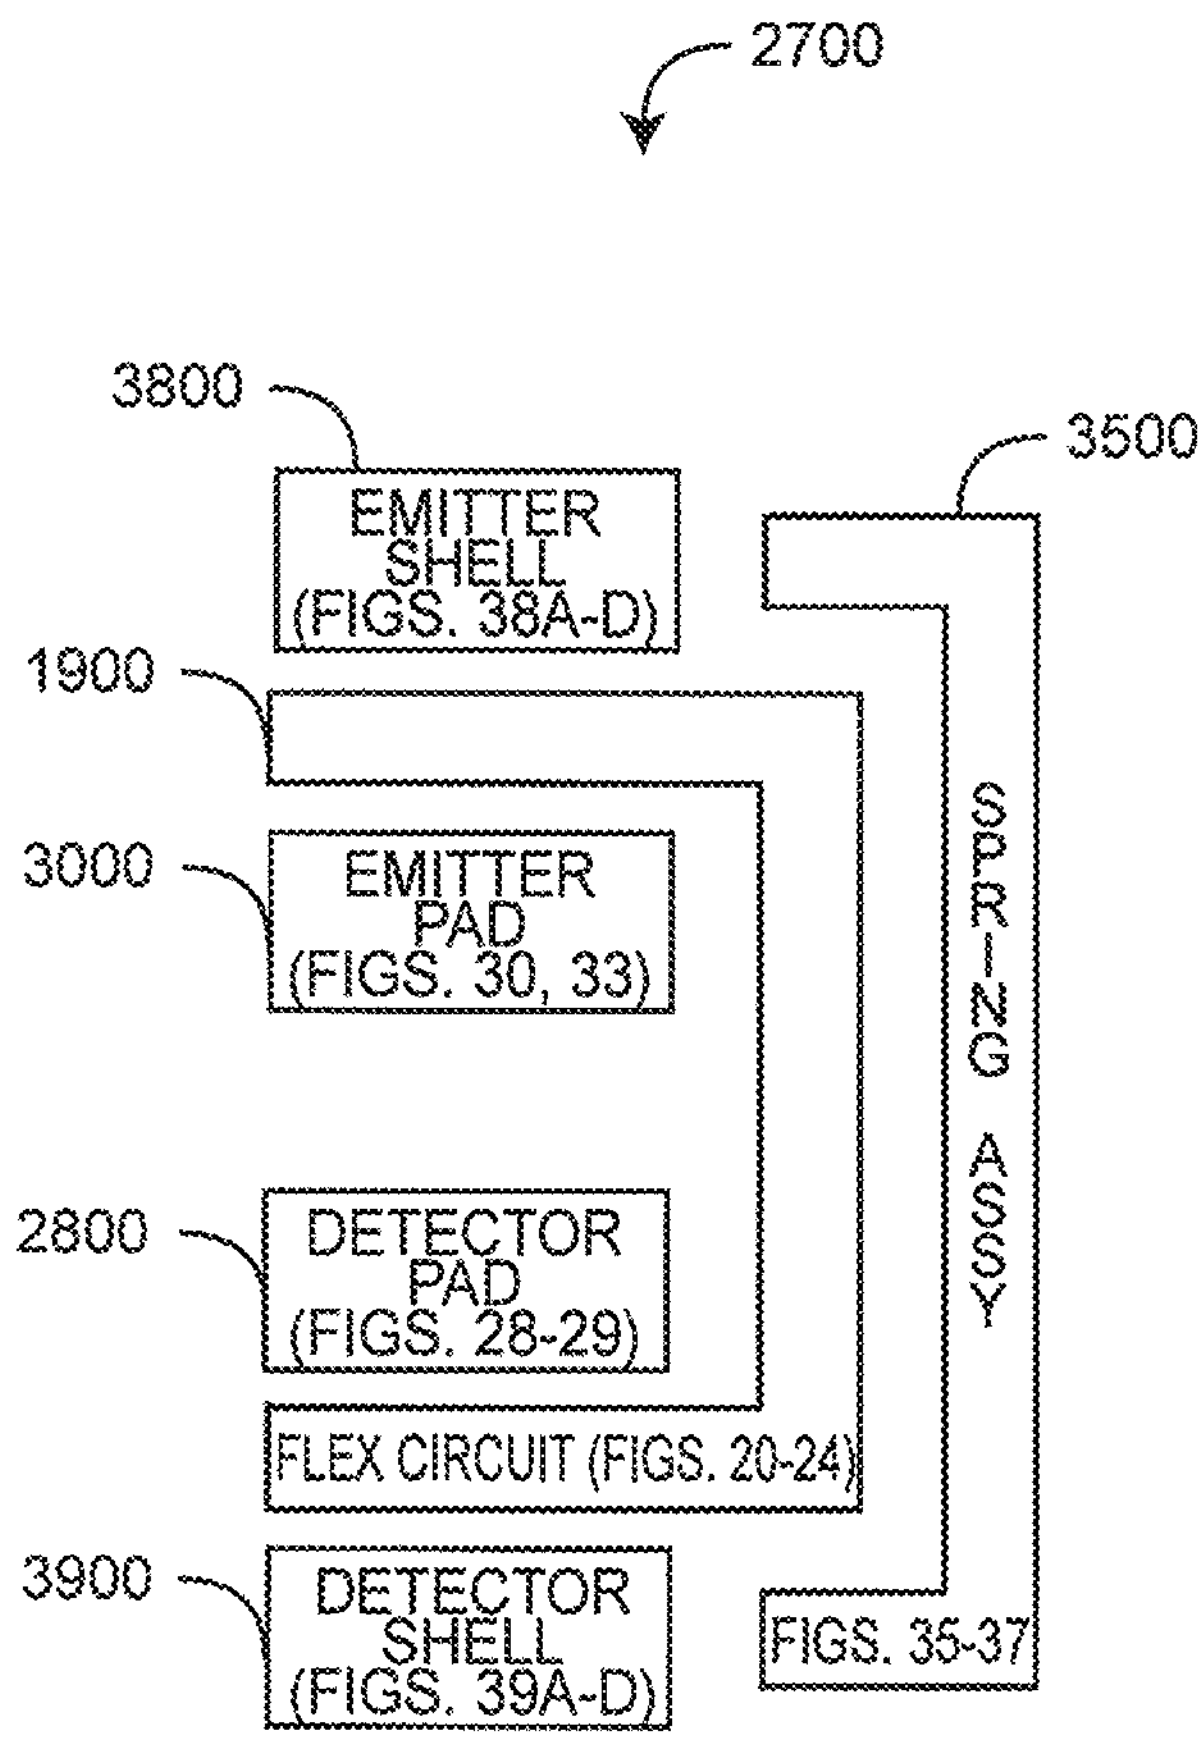
2700
3800
EMITTER SHELL (FIGS. 38A-D)
3500
1900
3000
EMITTER PAD (FIGS. 30, 33)
SPRING ASSY
2800
DETECTOR PAD (FIGS. 28-29)
FLEX CIRCUIT (FIGS. 20-24)
3900
DETECTOR SHELL (FIGS. 39A-D)
FIGS. 35-37

FIG. 27

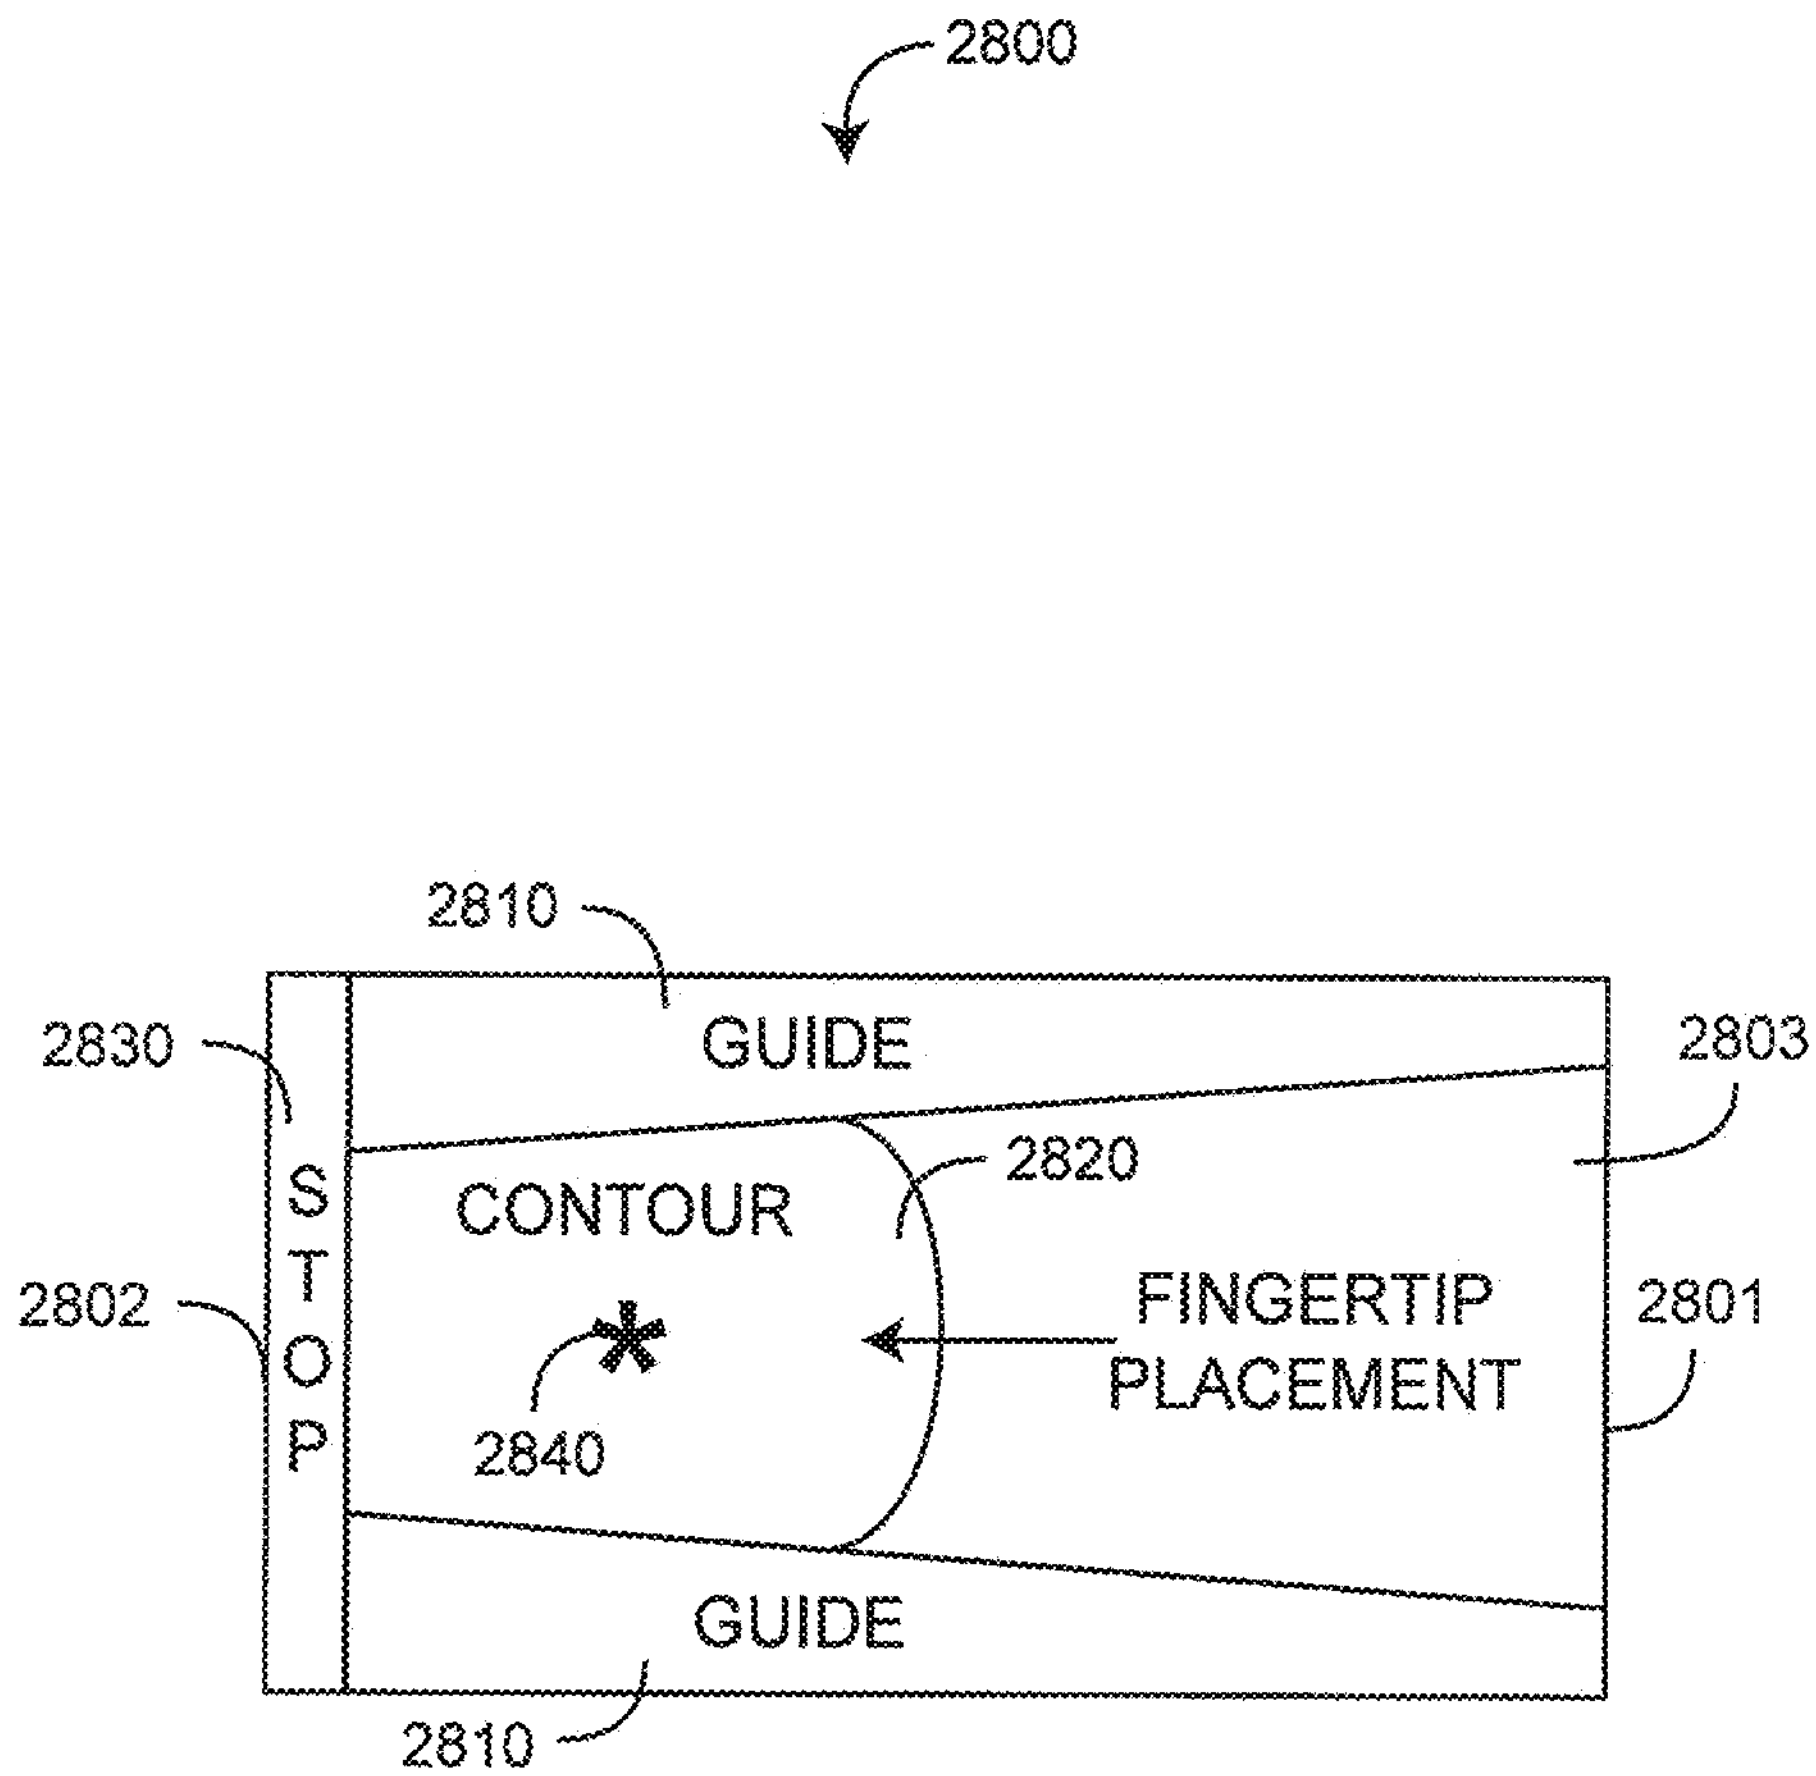
2800
2810
2830
GUIDE
2803
S
T
O
P
CONTOUR
2820
2802
FINGERTIP
PLACEMENT
2801
*
2840
GUIDE
2810

FIG. 28

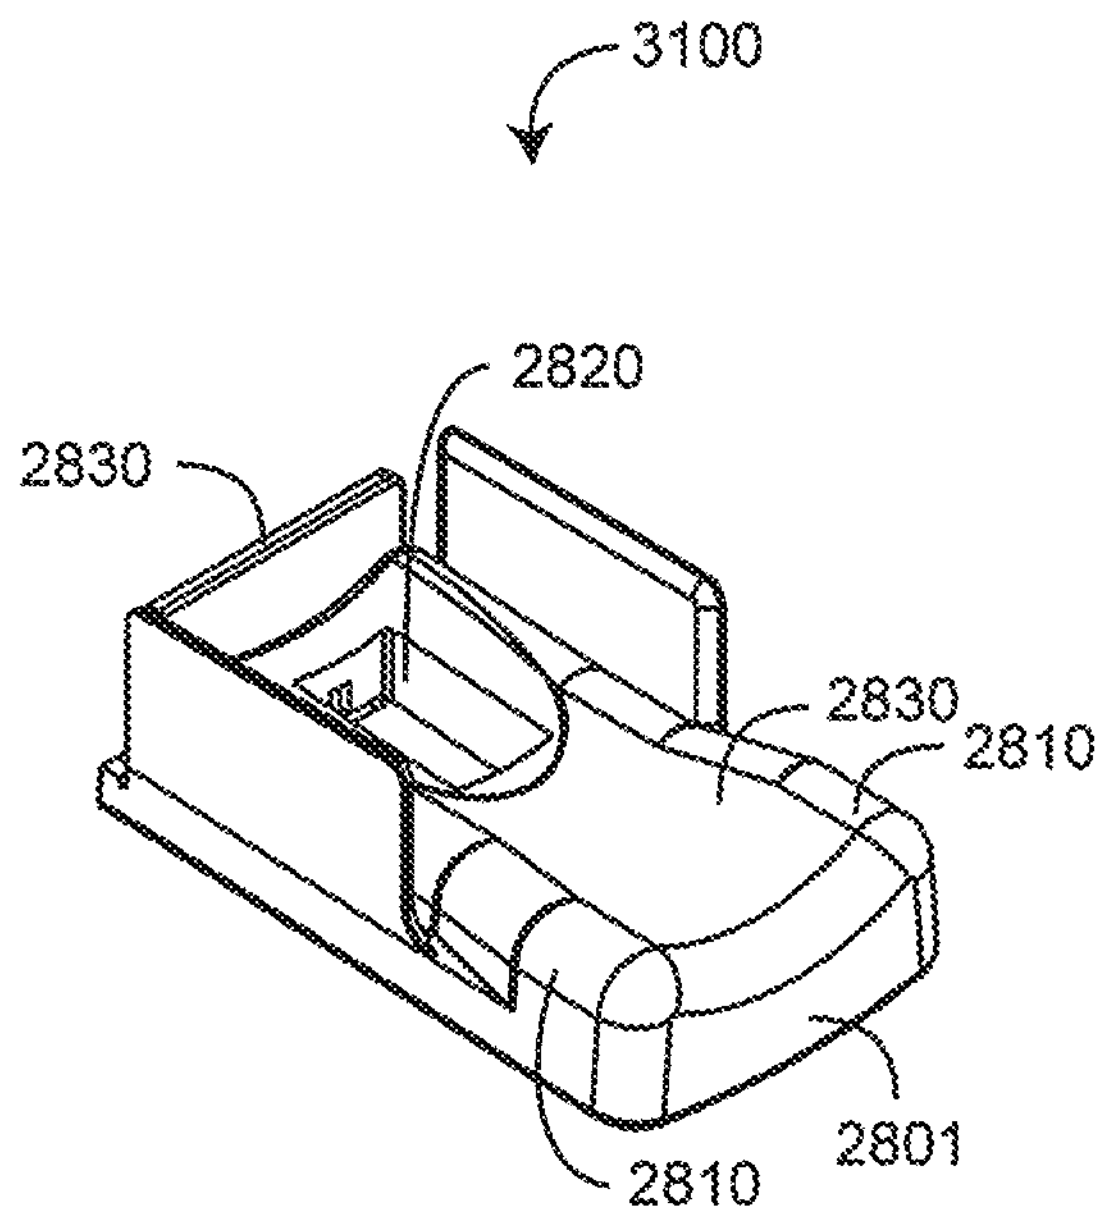

FIG. 29A

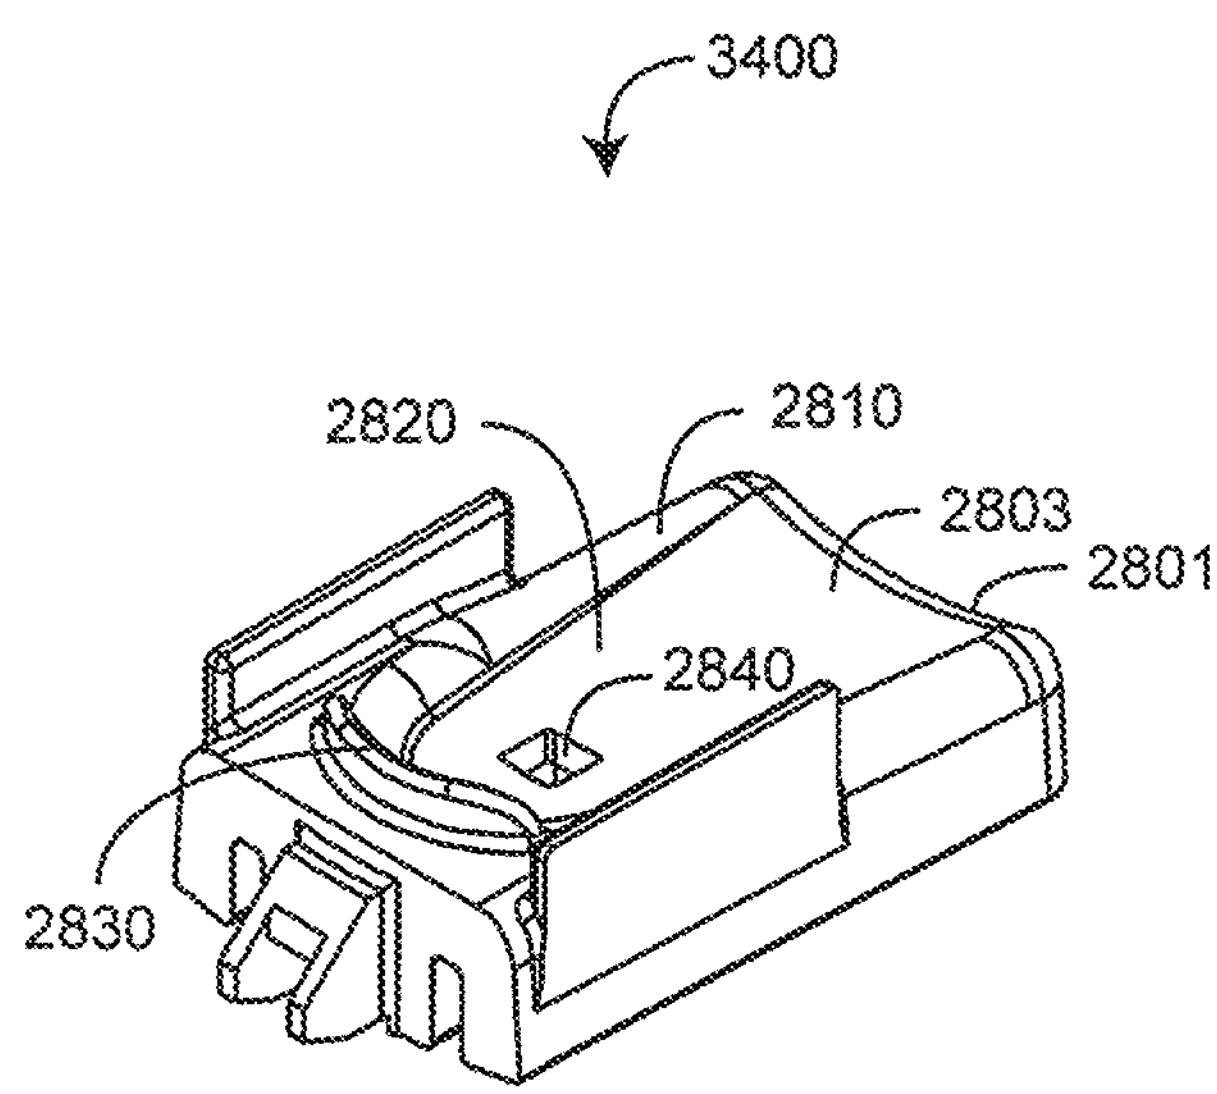

FIG. 29B

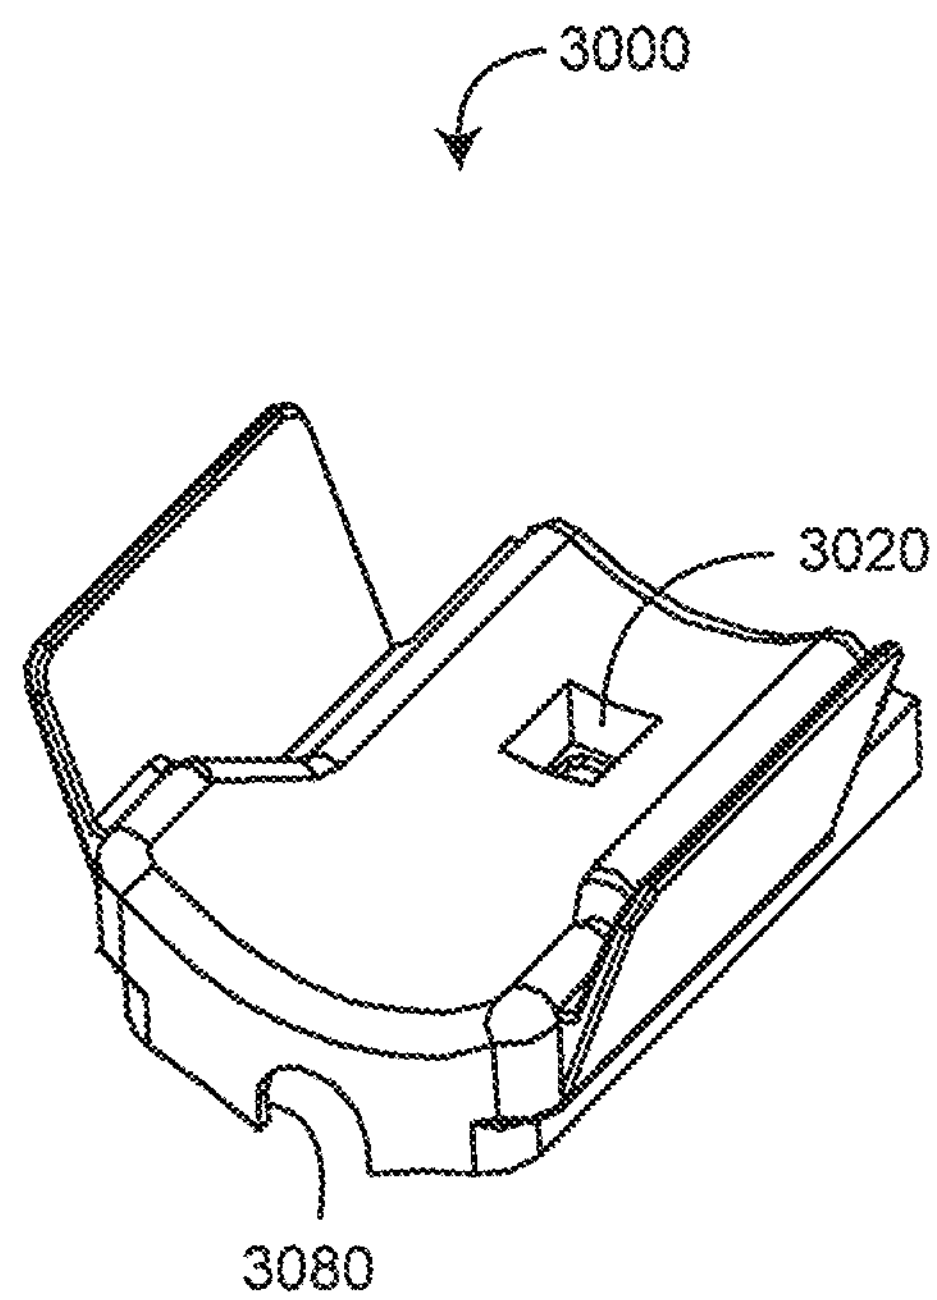

FIG. 30A

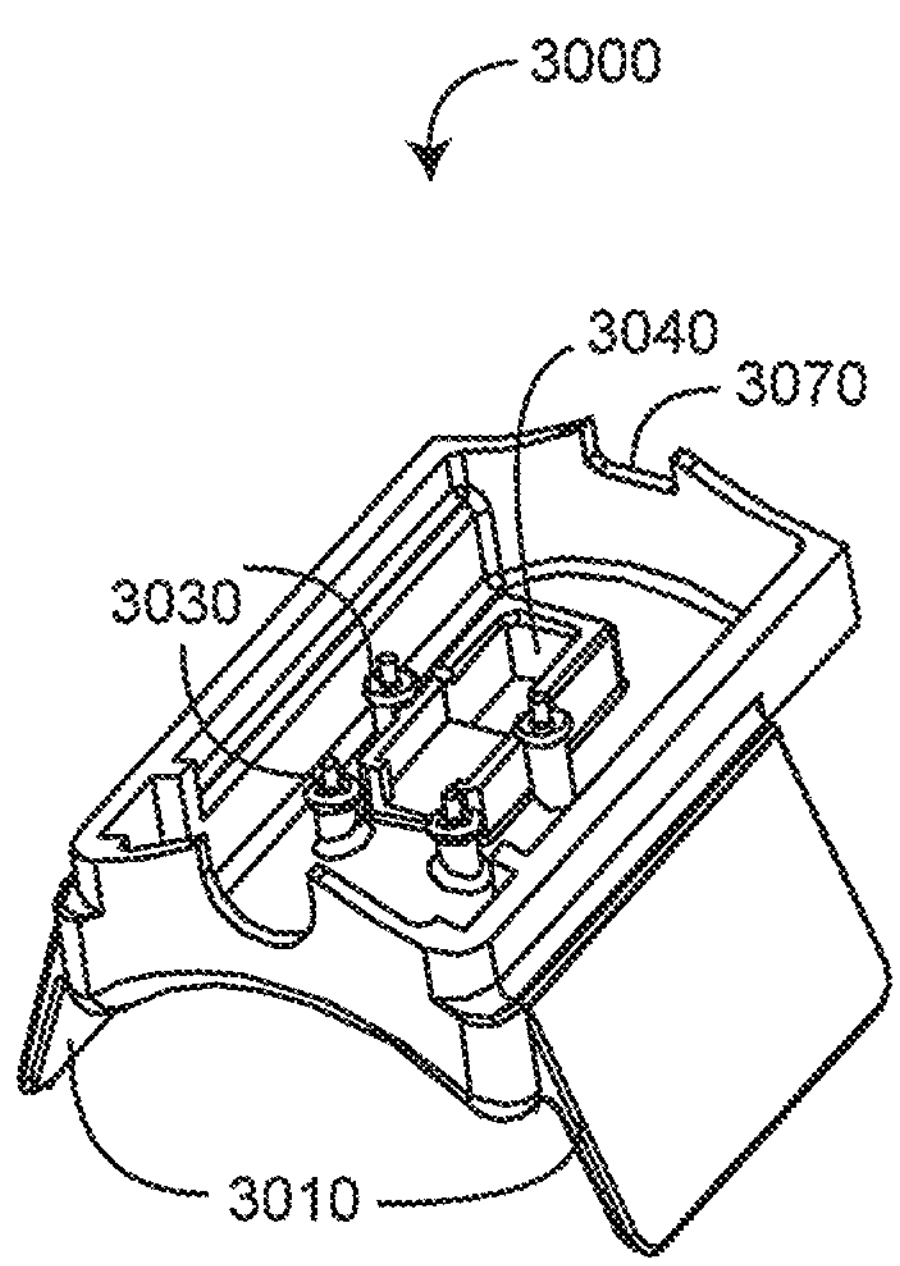

FIG. 30B

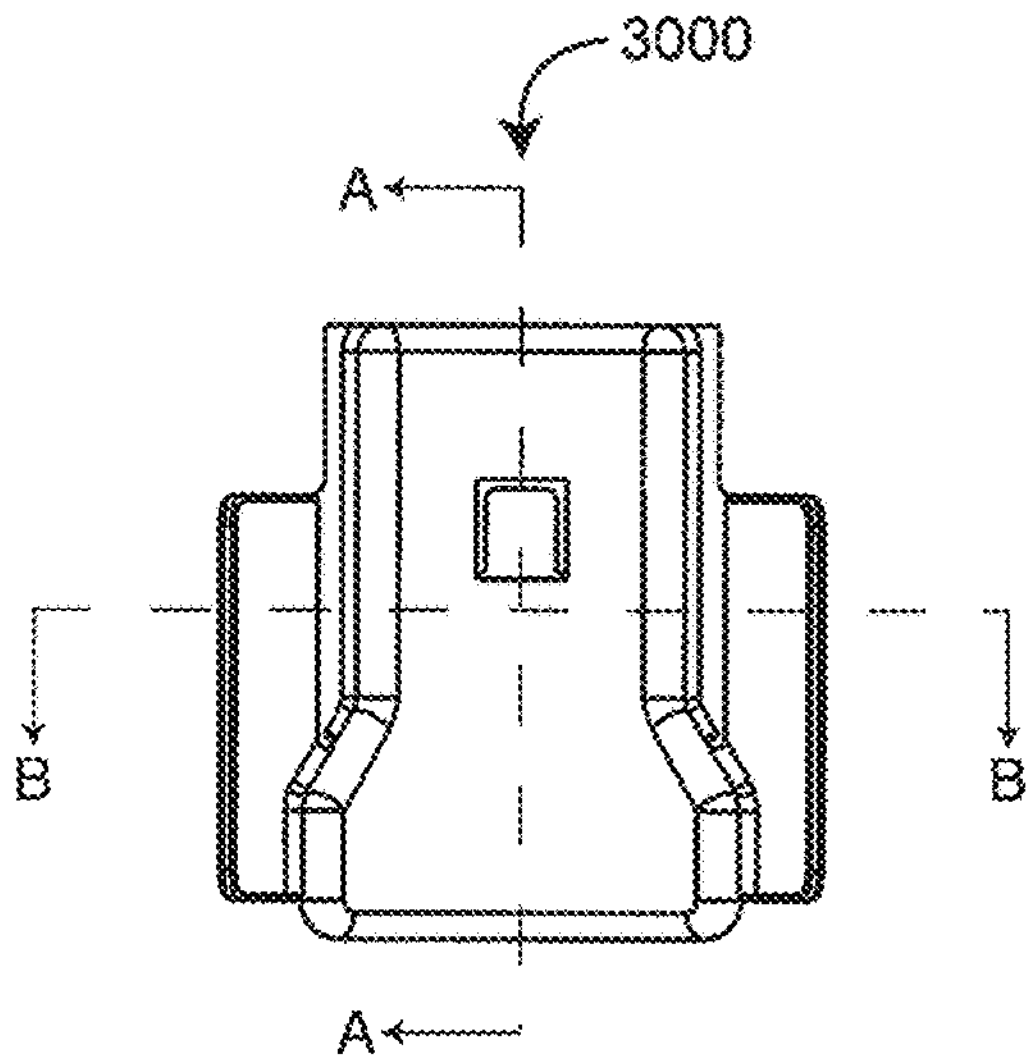

FIG. 30C

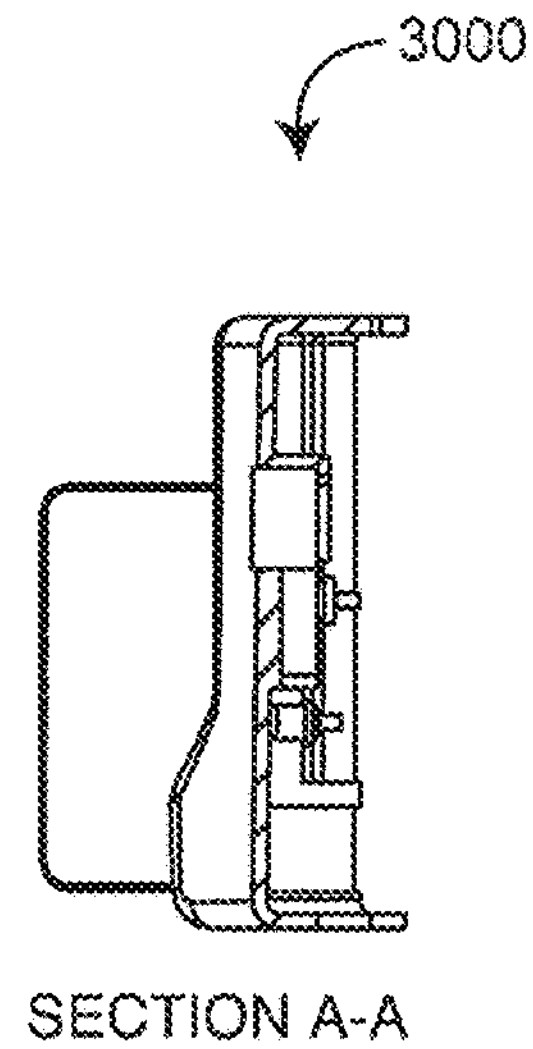

FIG. 30F

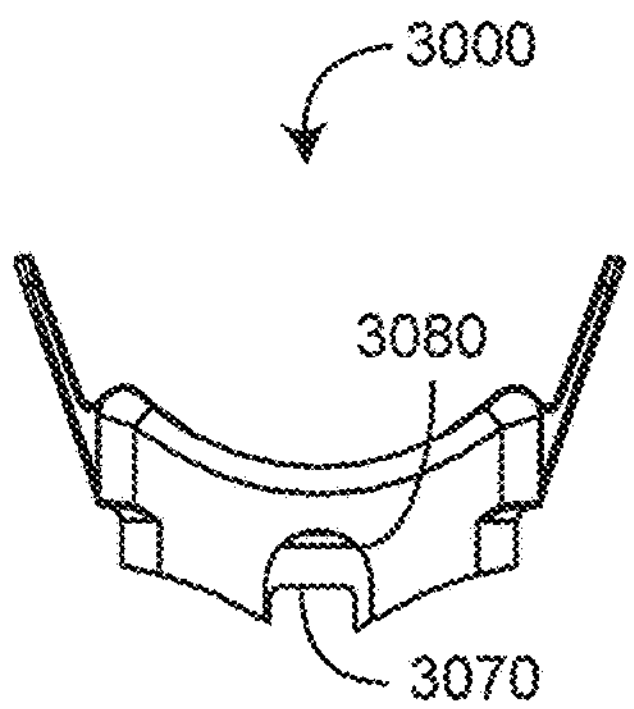

FIG. 30D

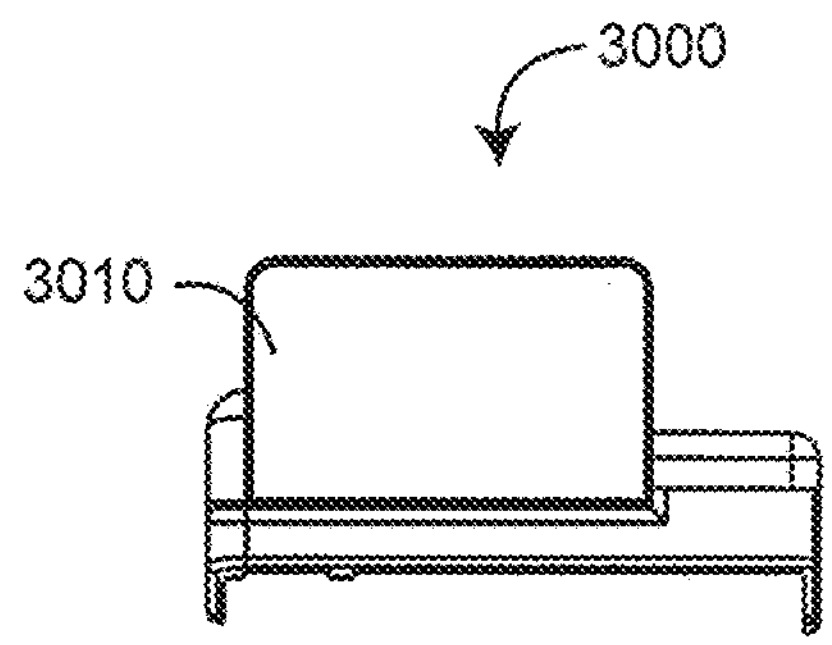

FIG. 30G

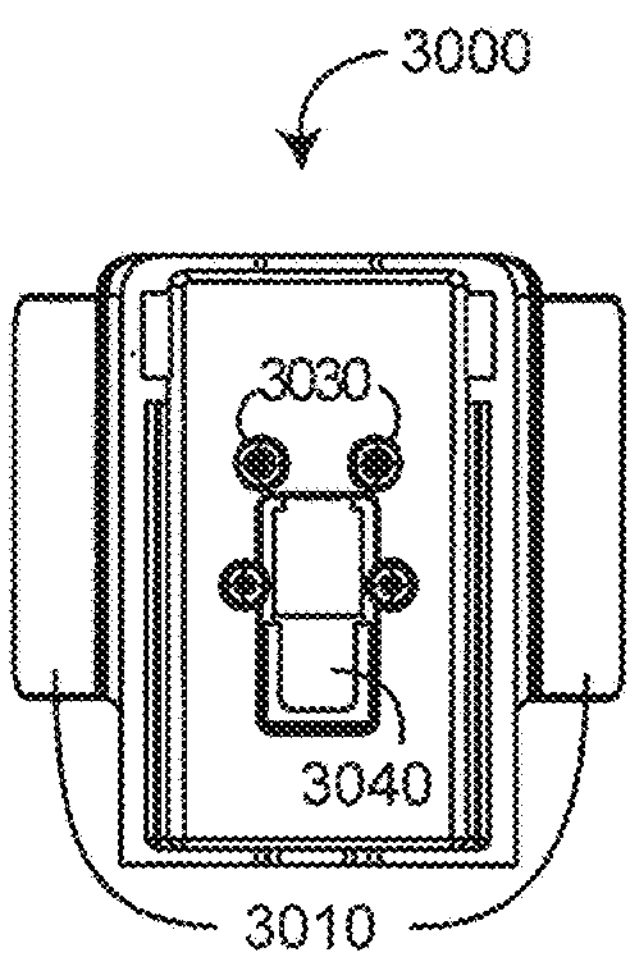

FIG. 30E

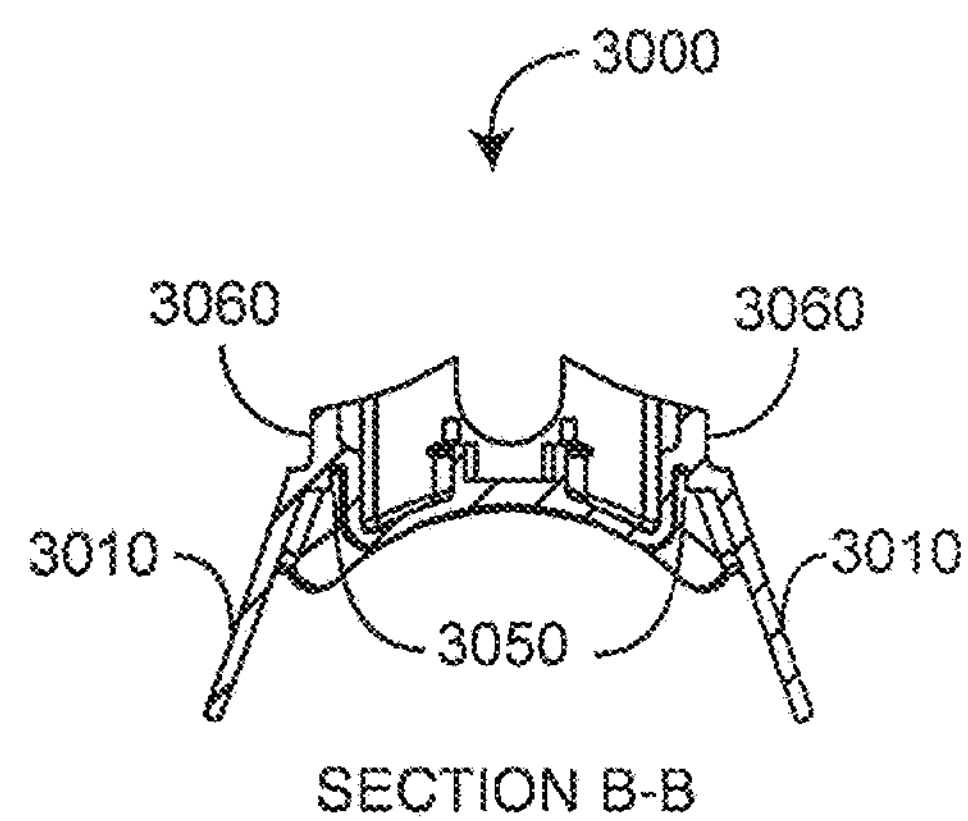

FIG. 30H

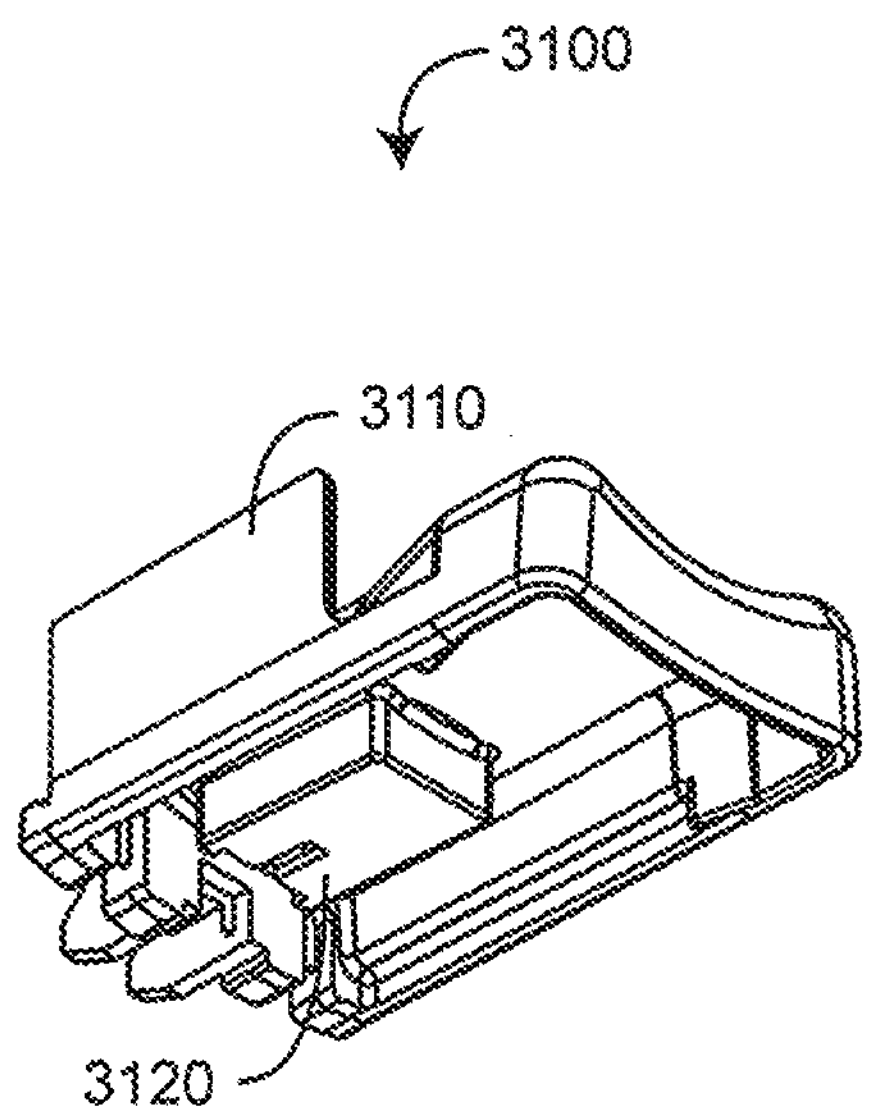

FIG. 31A

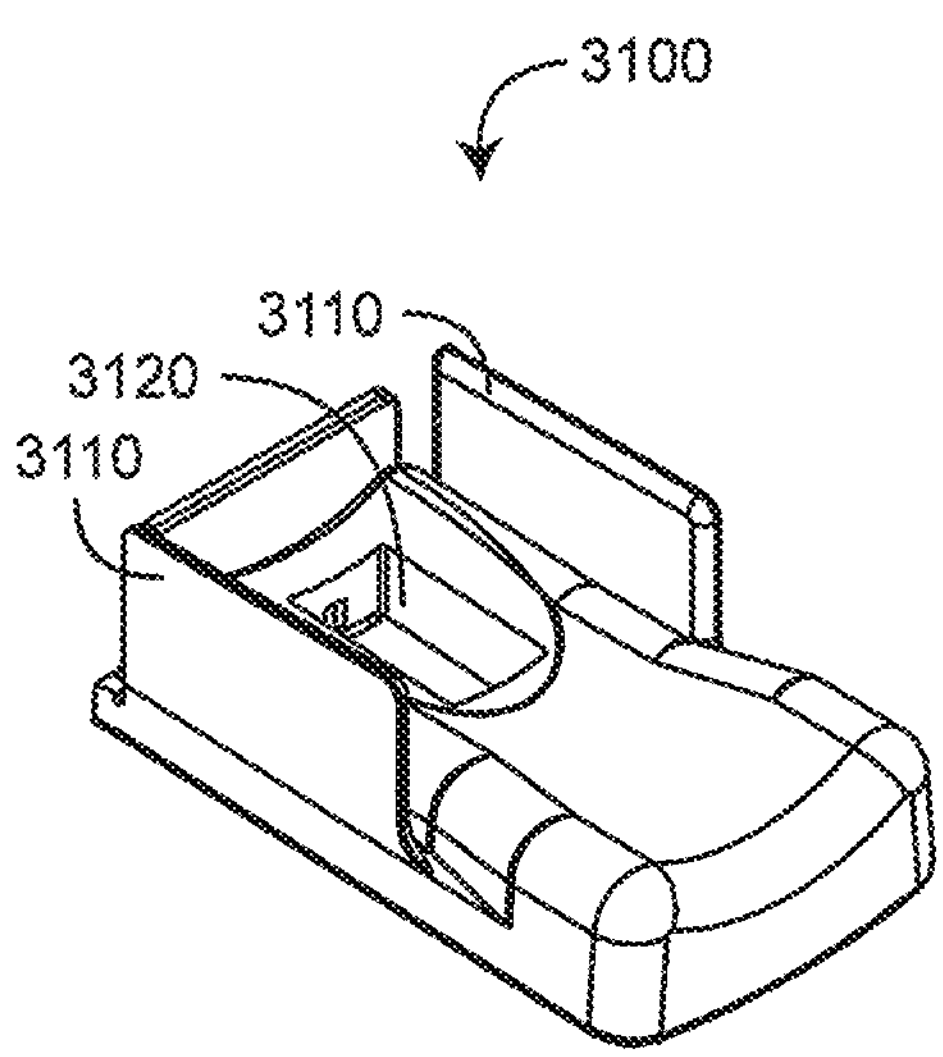

FIG. 31B

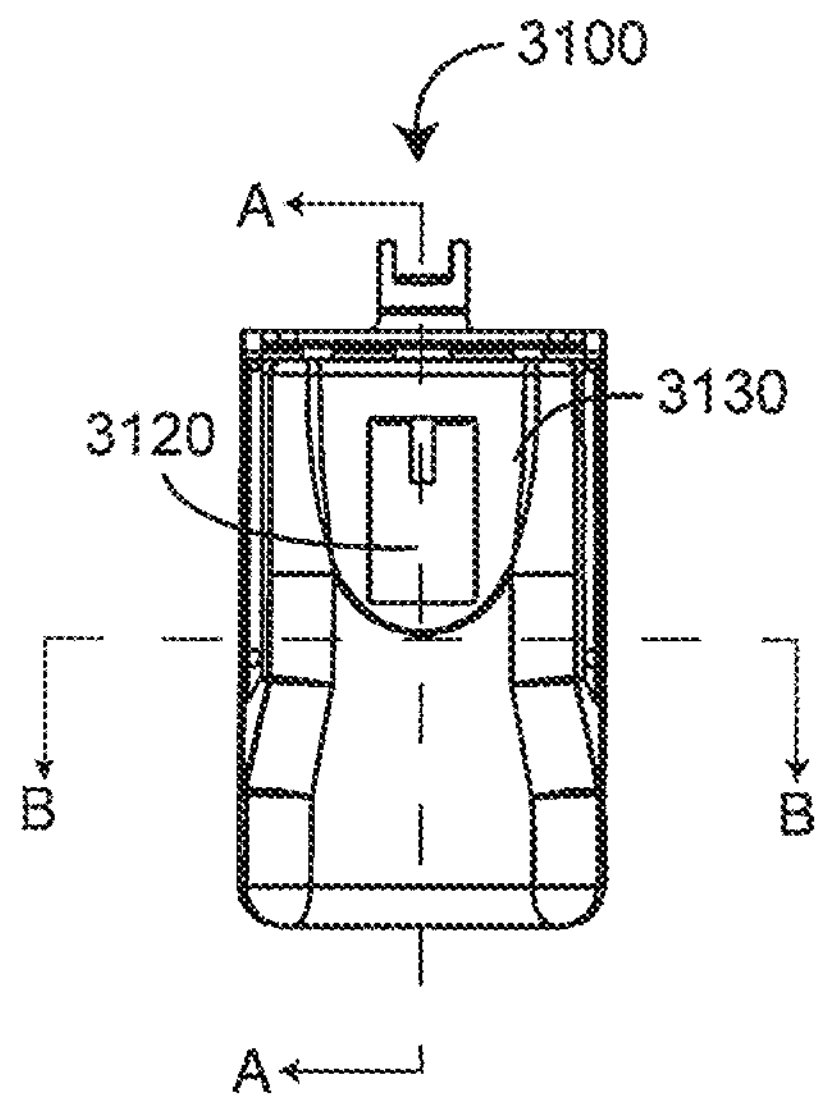

FIG. 31C

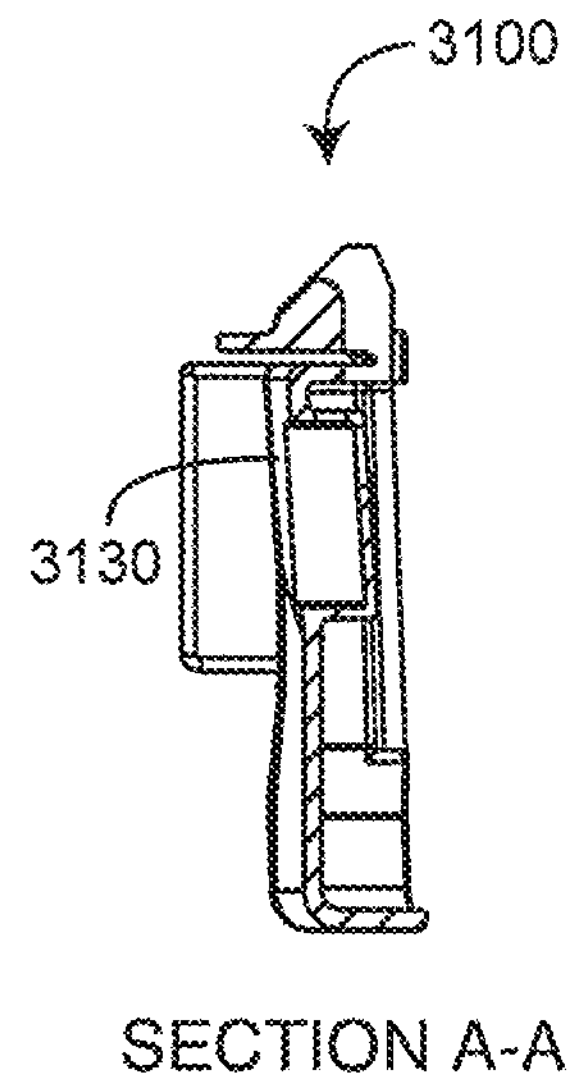

FIG. 31F



FIG. 31D

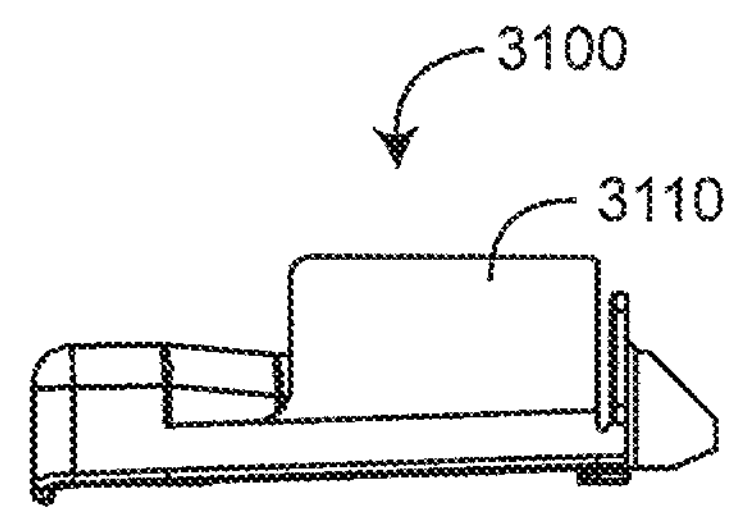

FIG. 31G

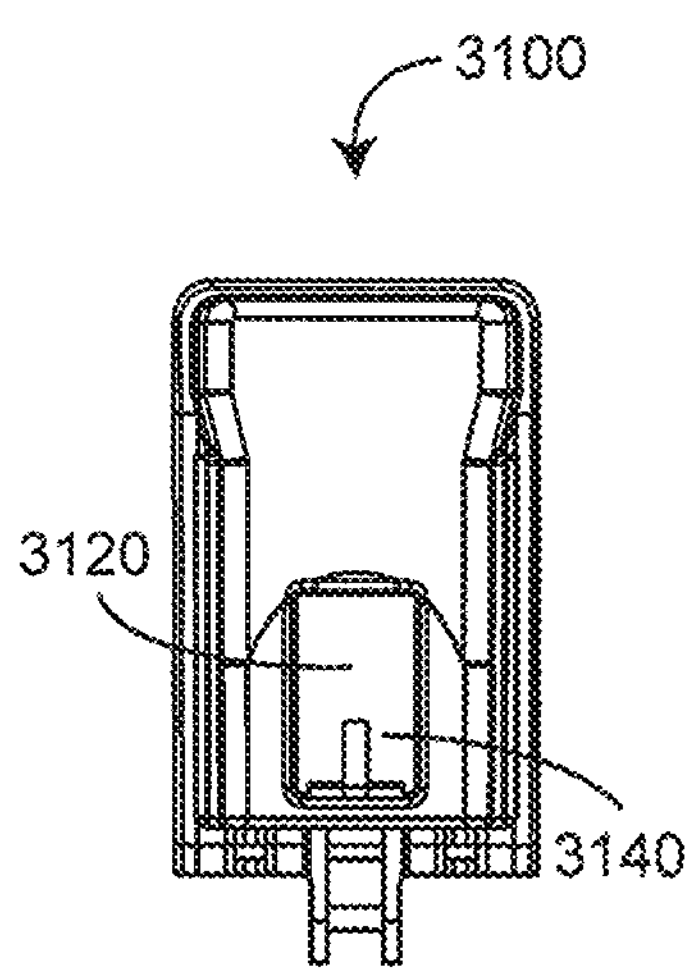

FIG. 31E

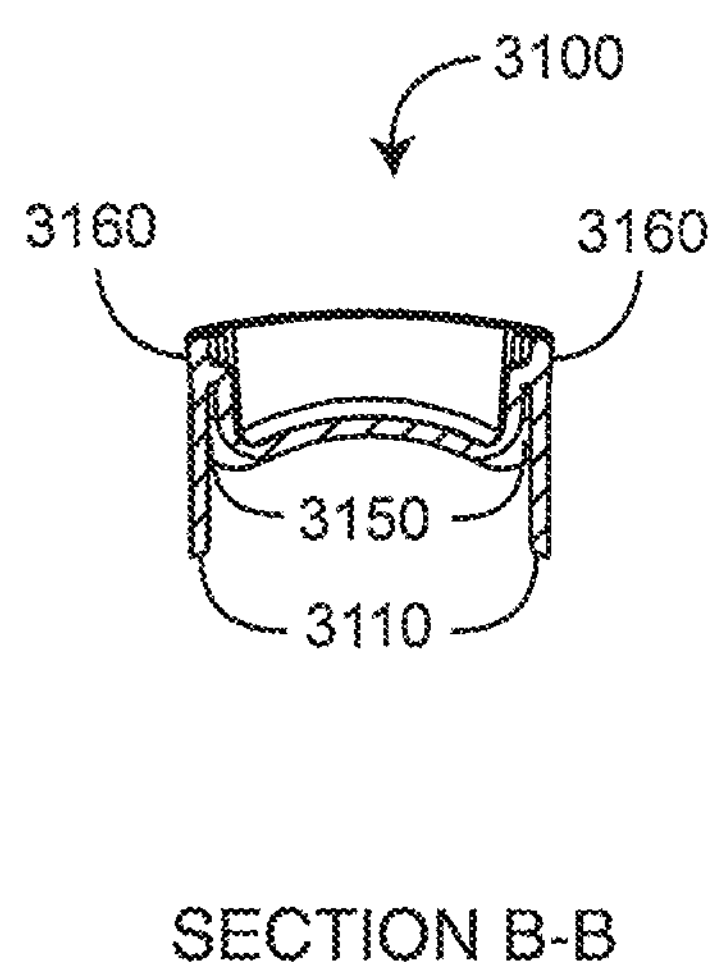

FIG. 31H

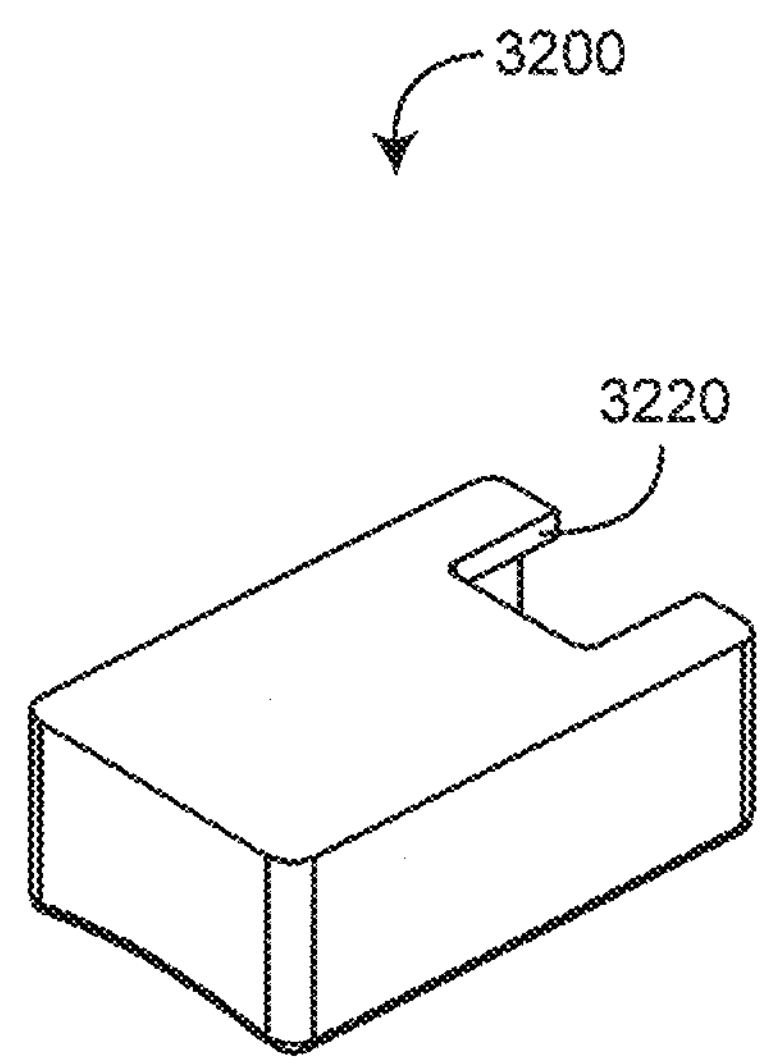

FIG. 32A

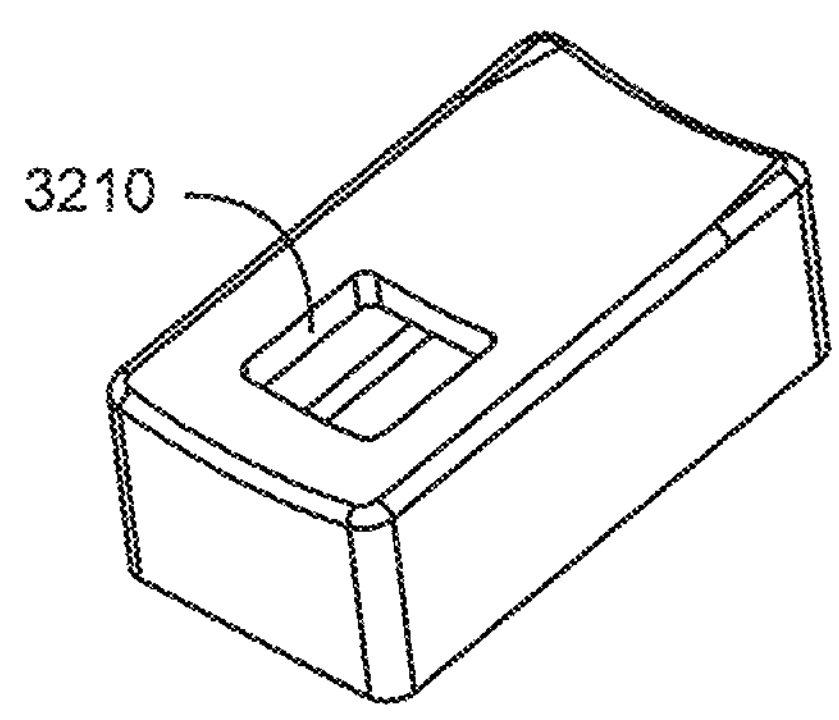

FIG. 32B

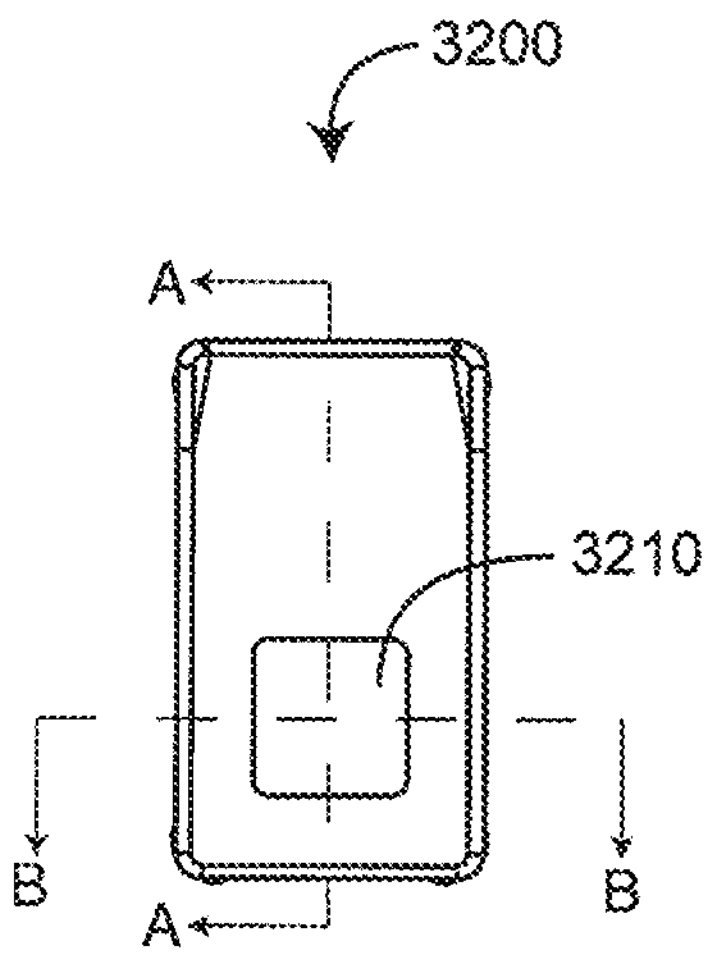

FIG. 32C

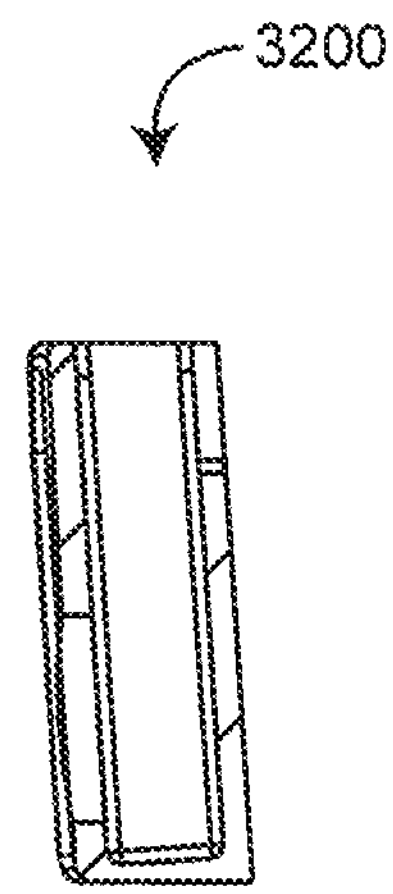

SECTION A-A

FIG. 32F



FIG. 32D



FIG. 32G

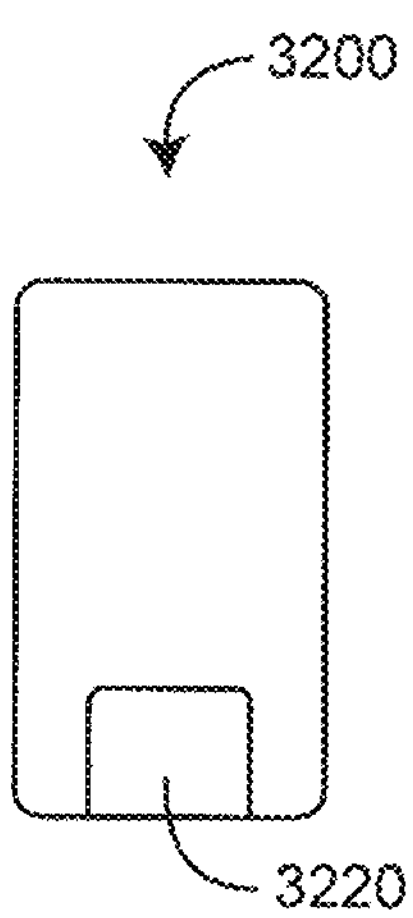

FIG. 32E



SECTION B-B

FIG. 32H

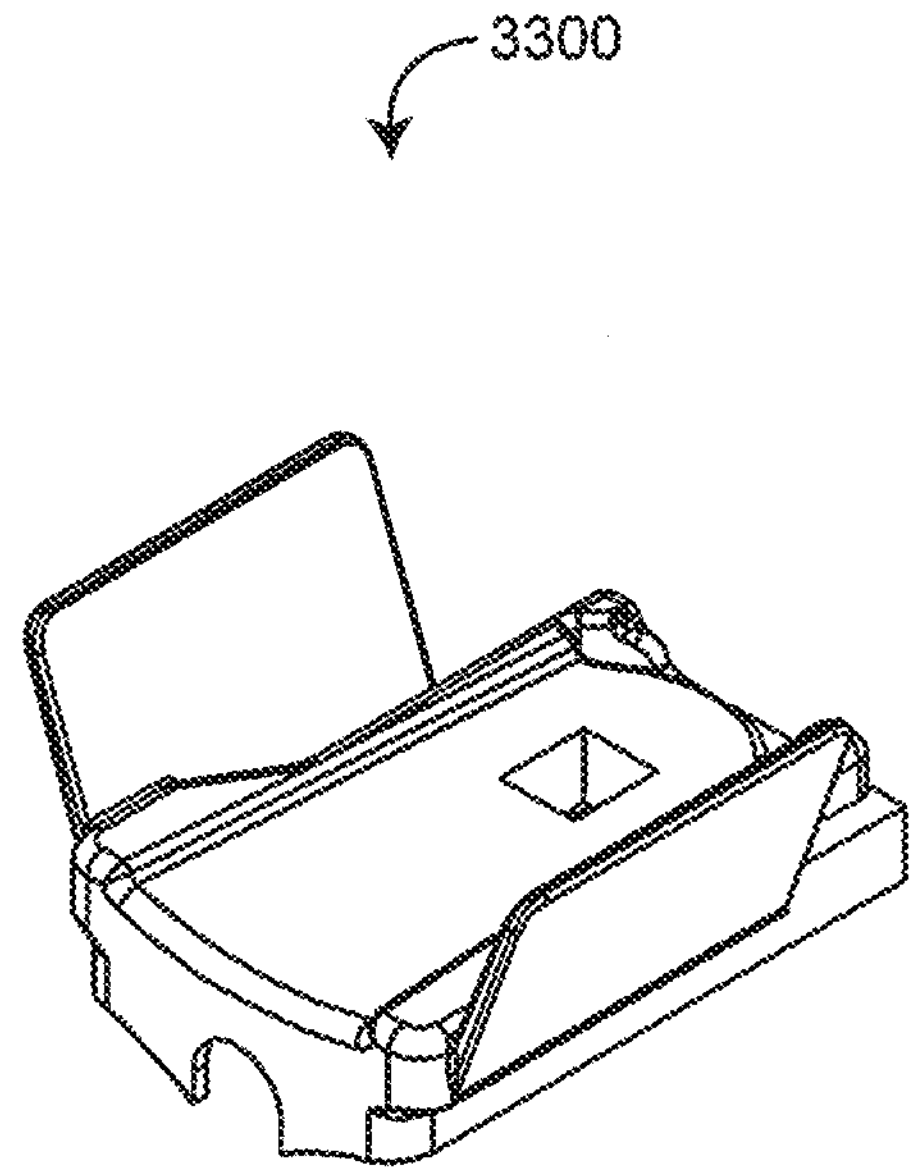

FIG. 33A

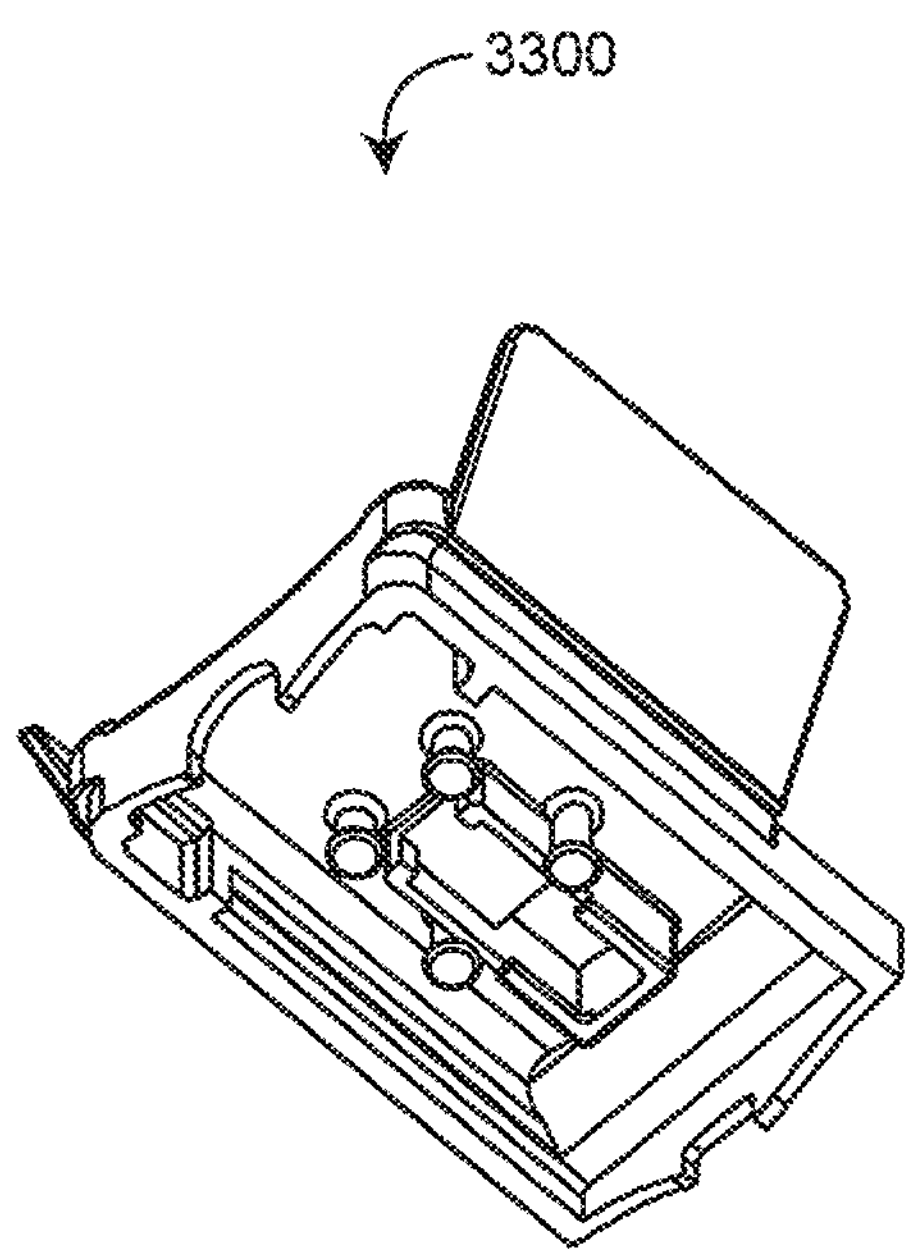

FIG. 33B

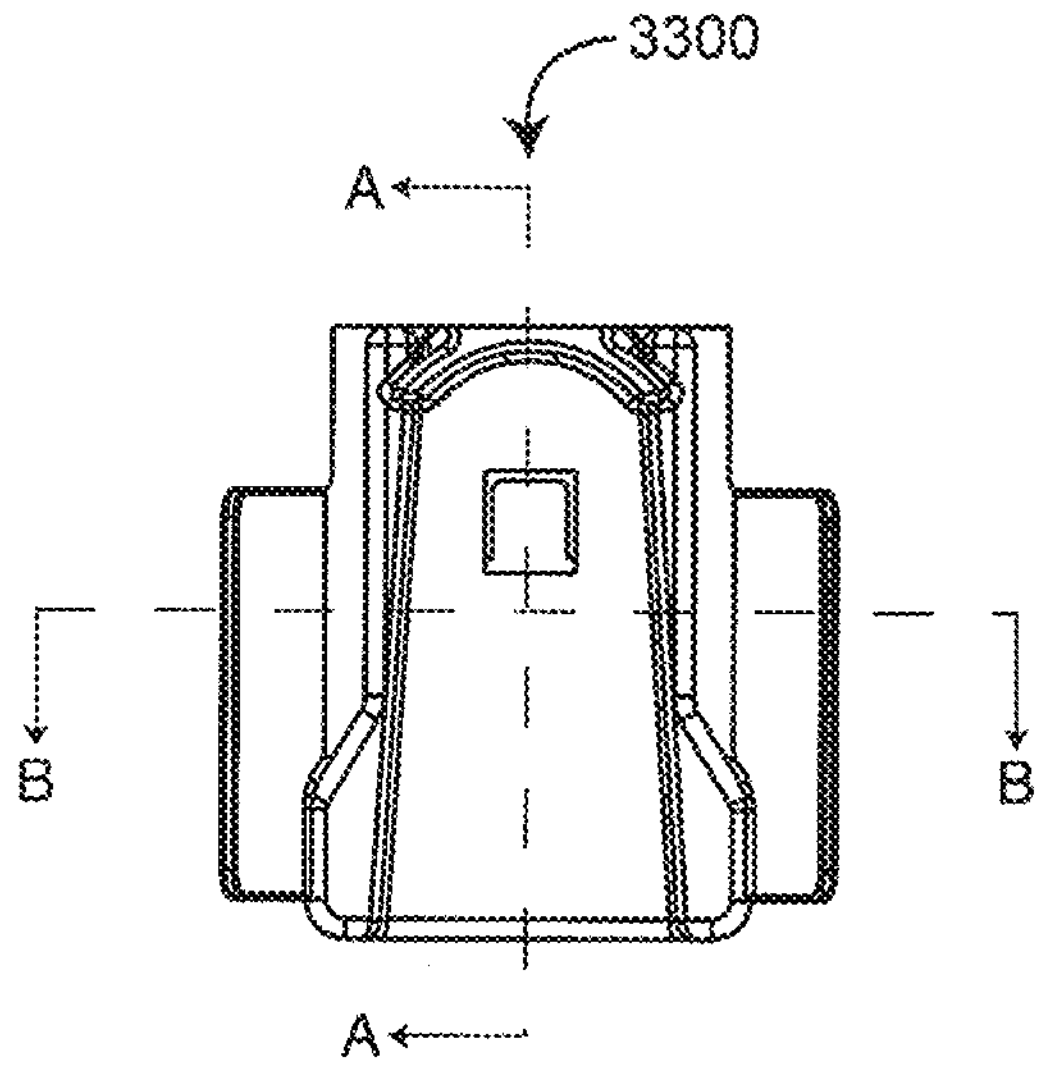

FIG. 33C

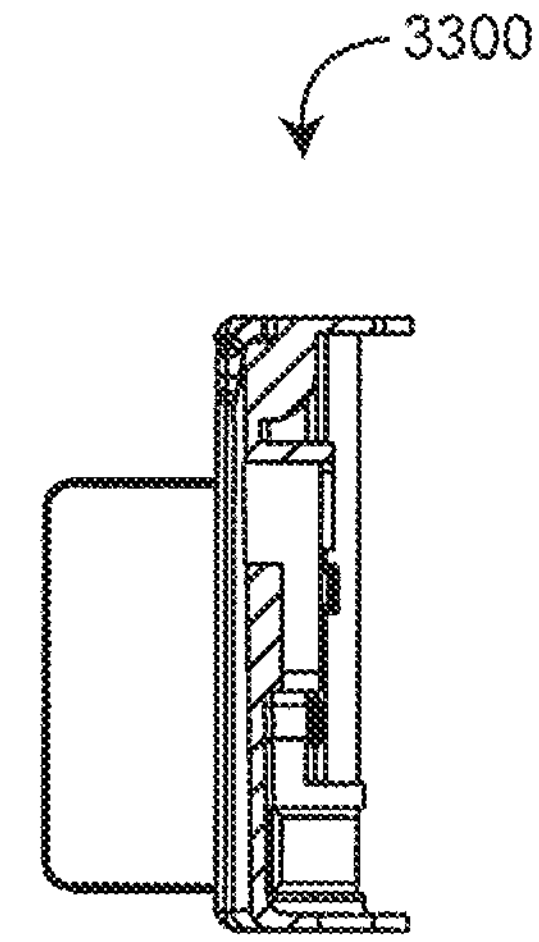

SECTION A-A

FIG. 33F



FIG. 33D



FIG. 33G

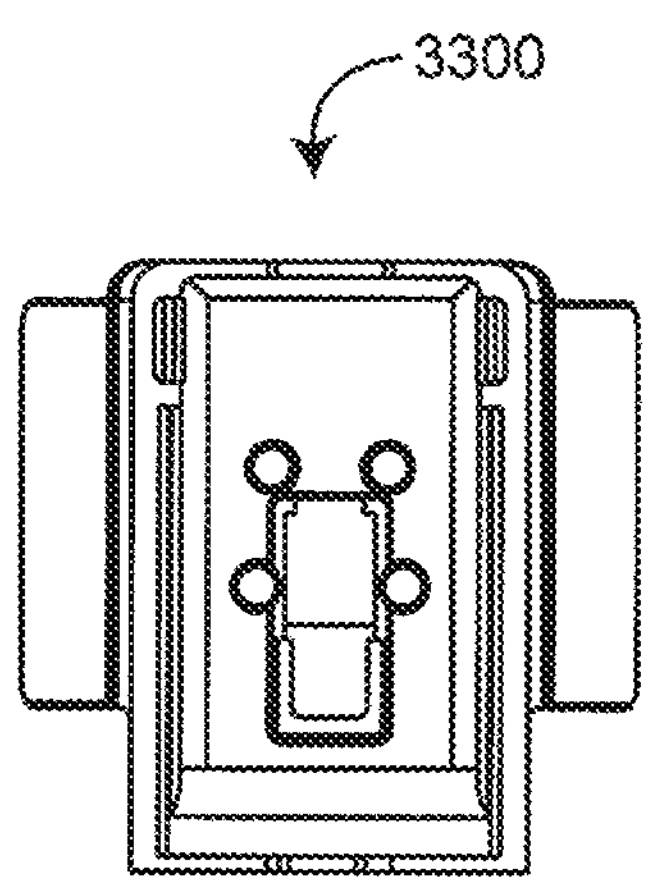

FIG. 33E

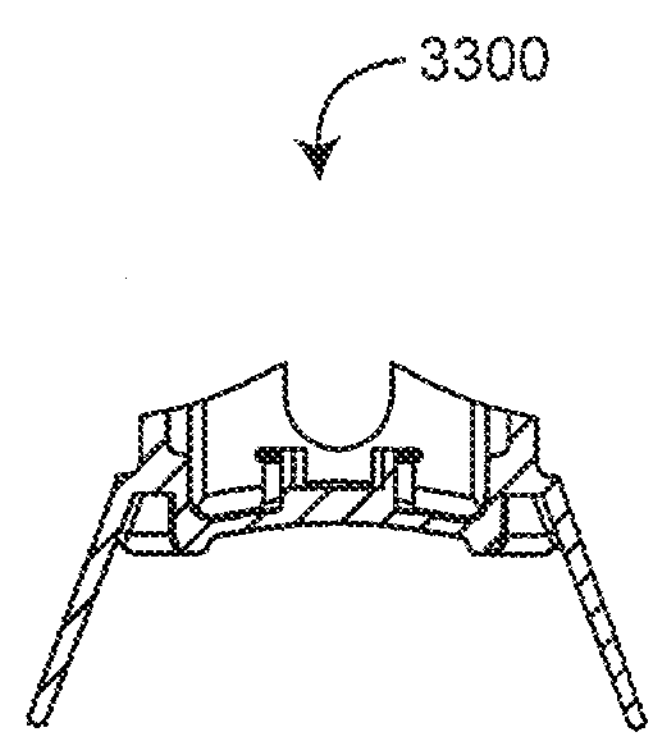

SECTION B-B

FIG. 33H

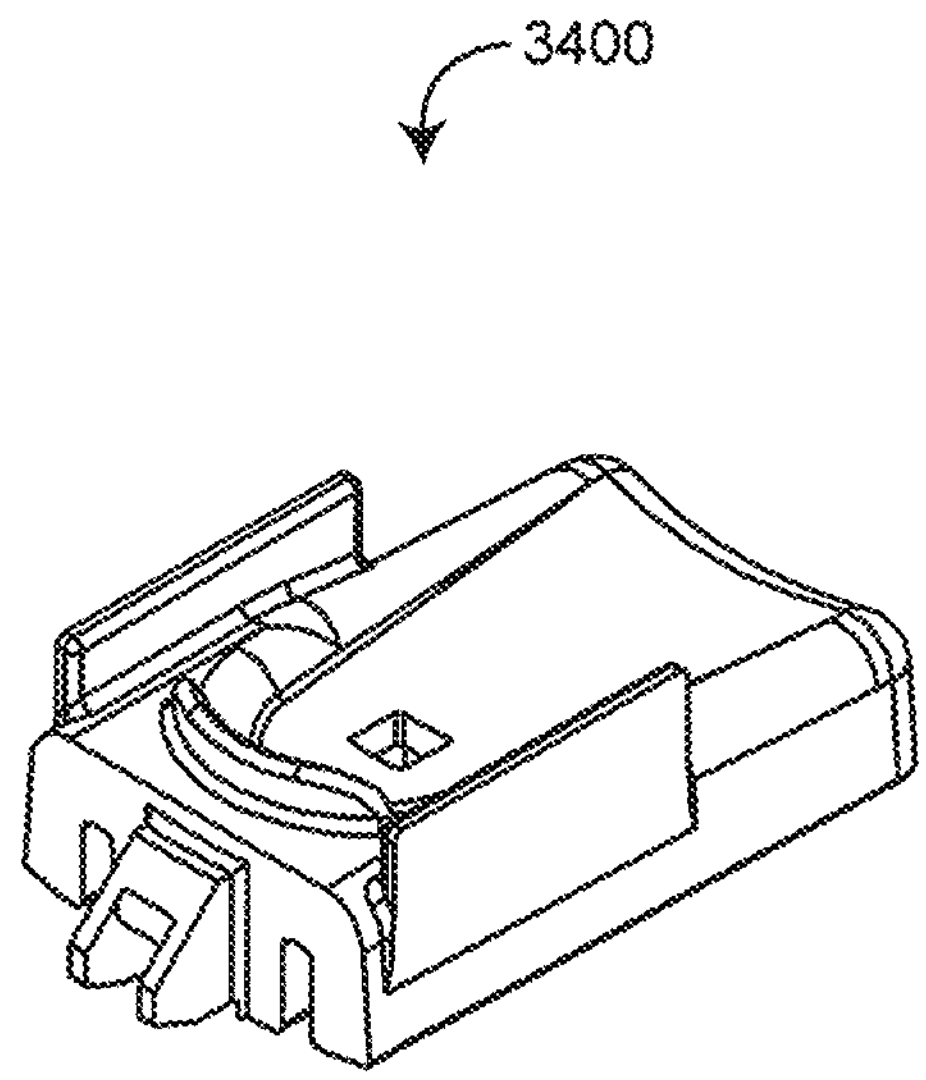

FIG. 34A

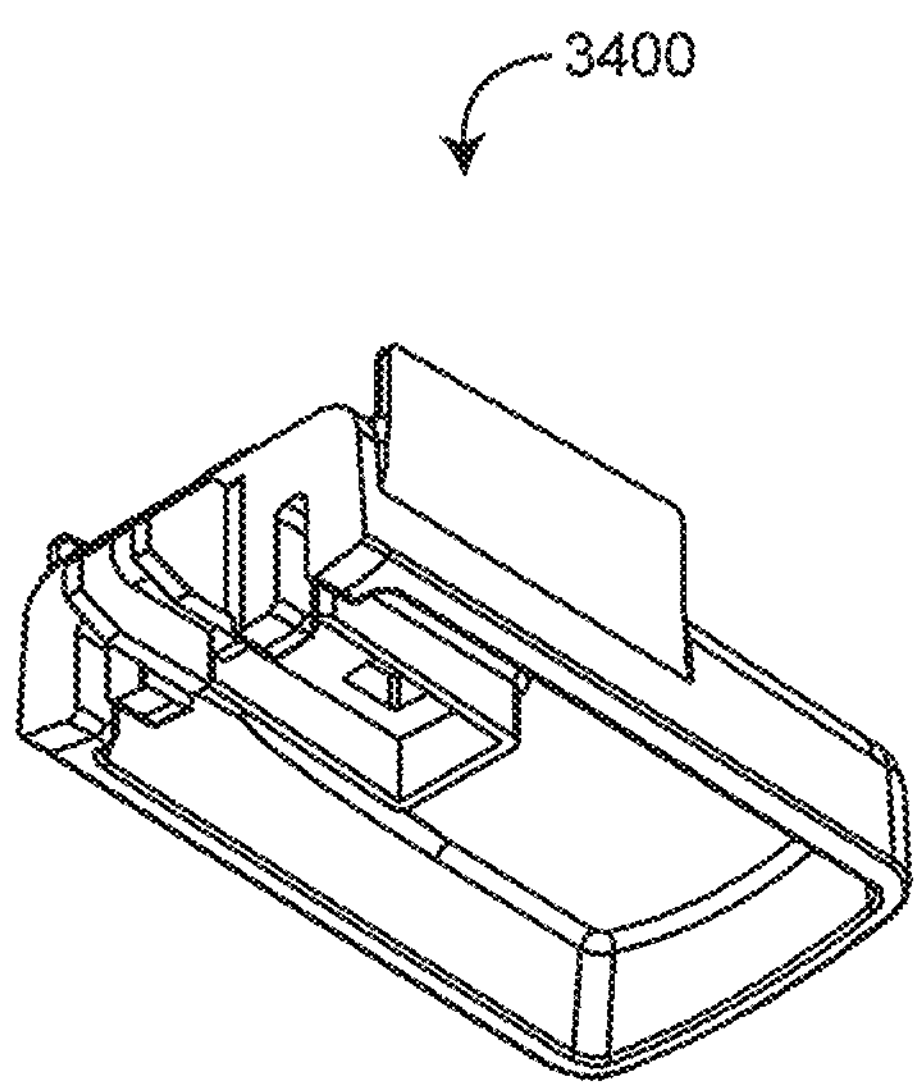

FIG. 34B

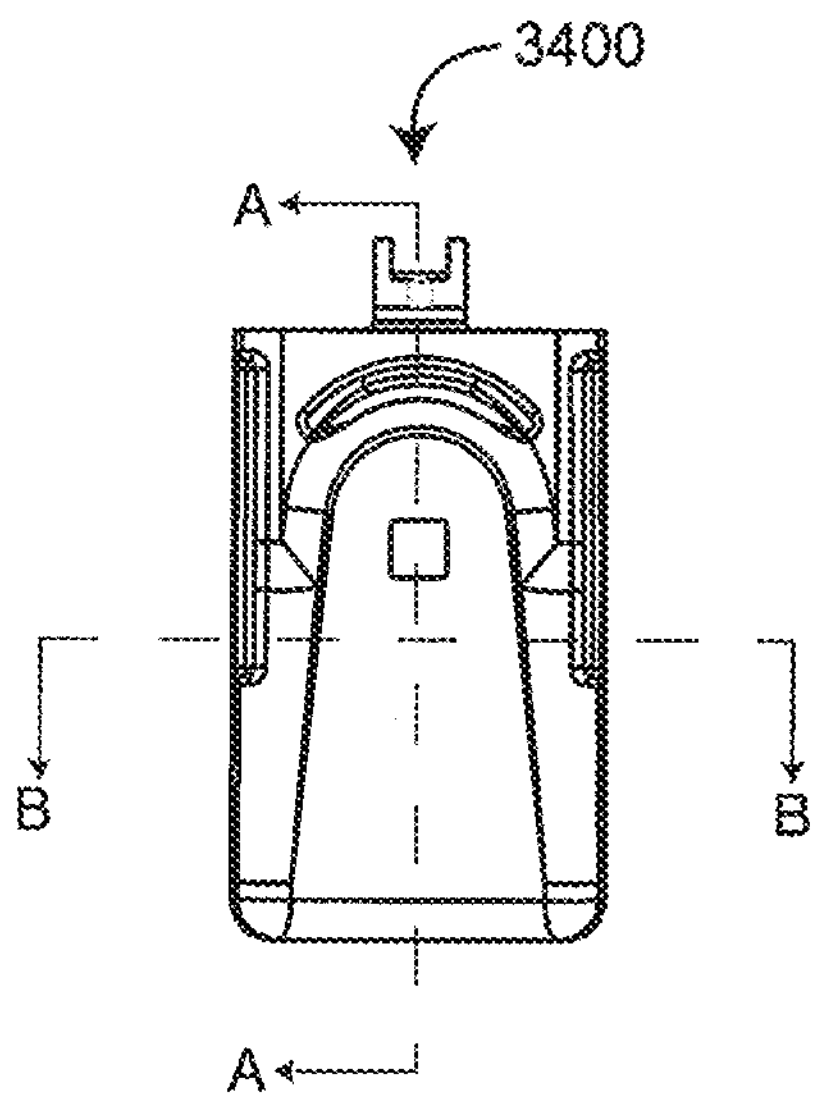

FIG. 34C



SECTION A-A

FIG. 34F



FIG. 34D

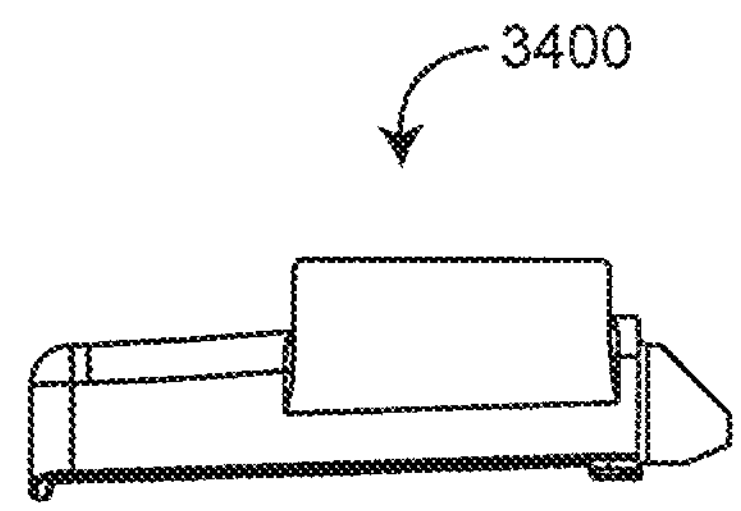

FIG. 34G

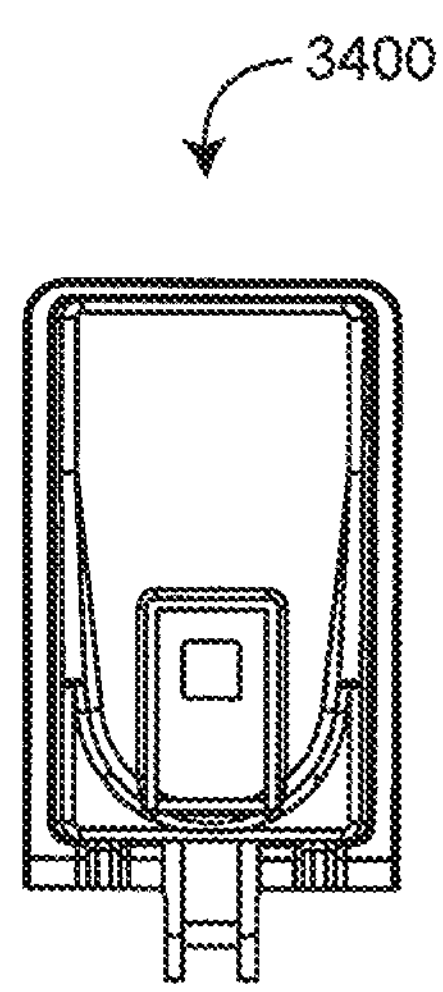

FIG. 34E



SECTION B-B

FIG. 34H

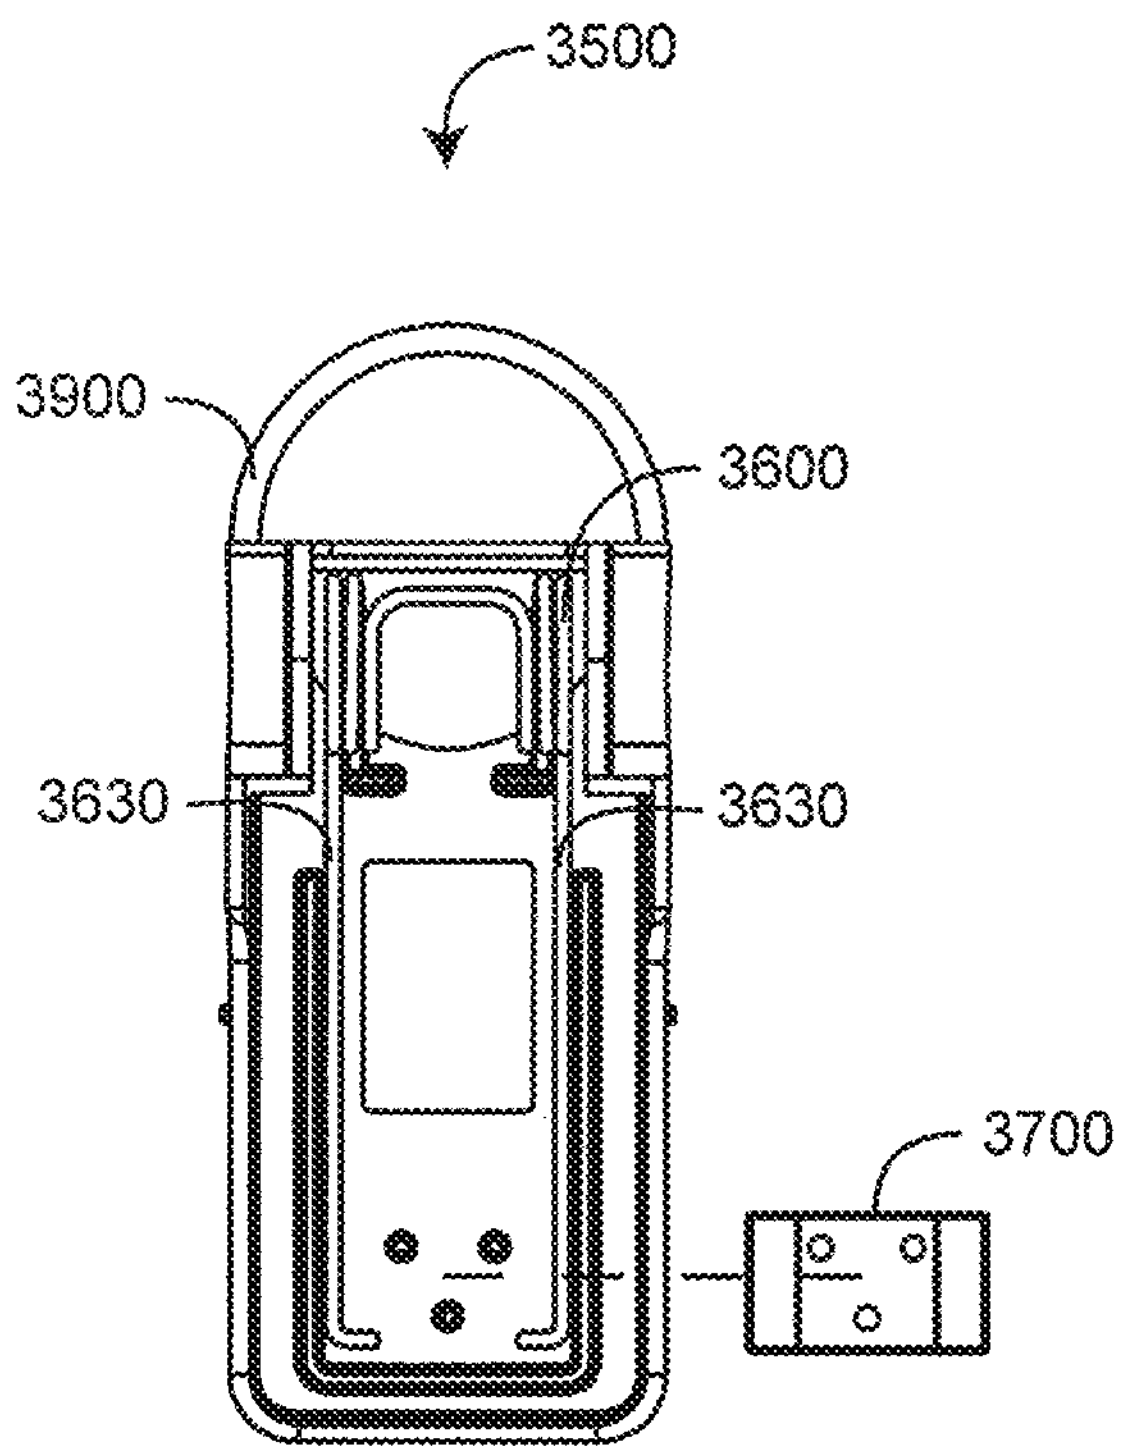

FIG. 35A

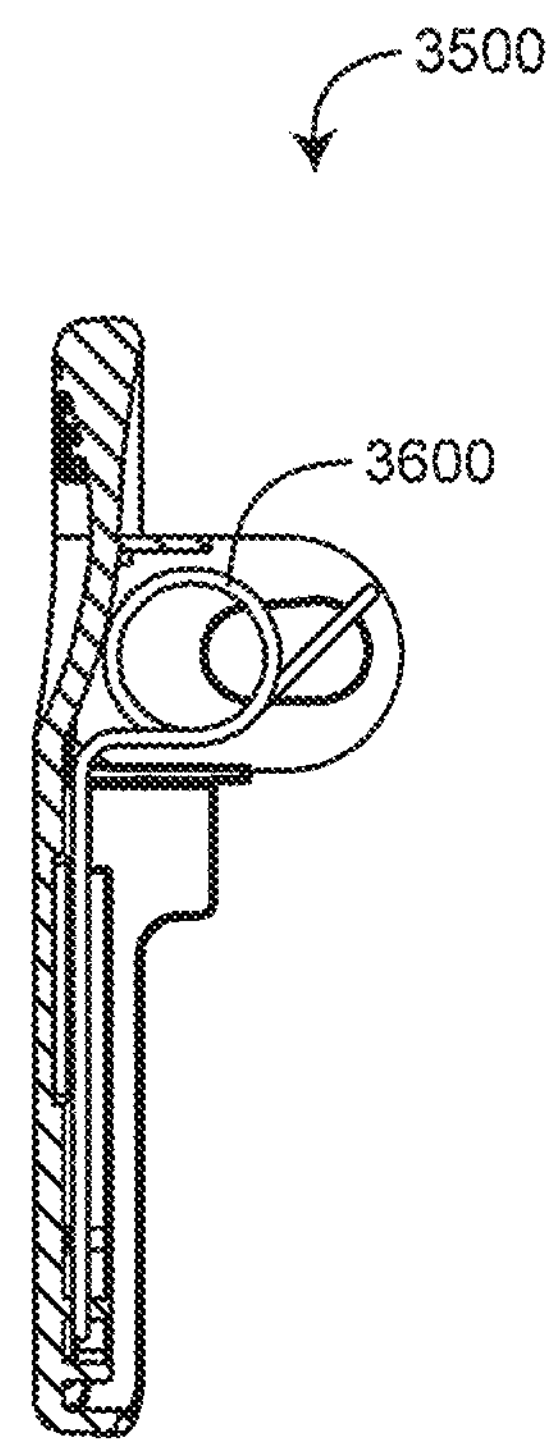

FIG. 35B

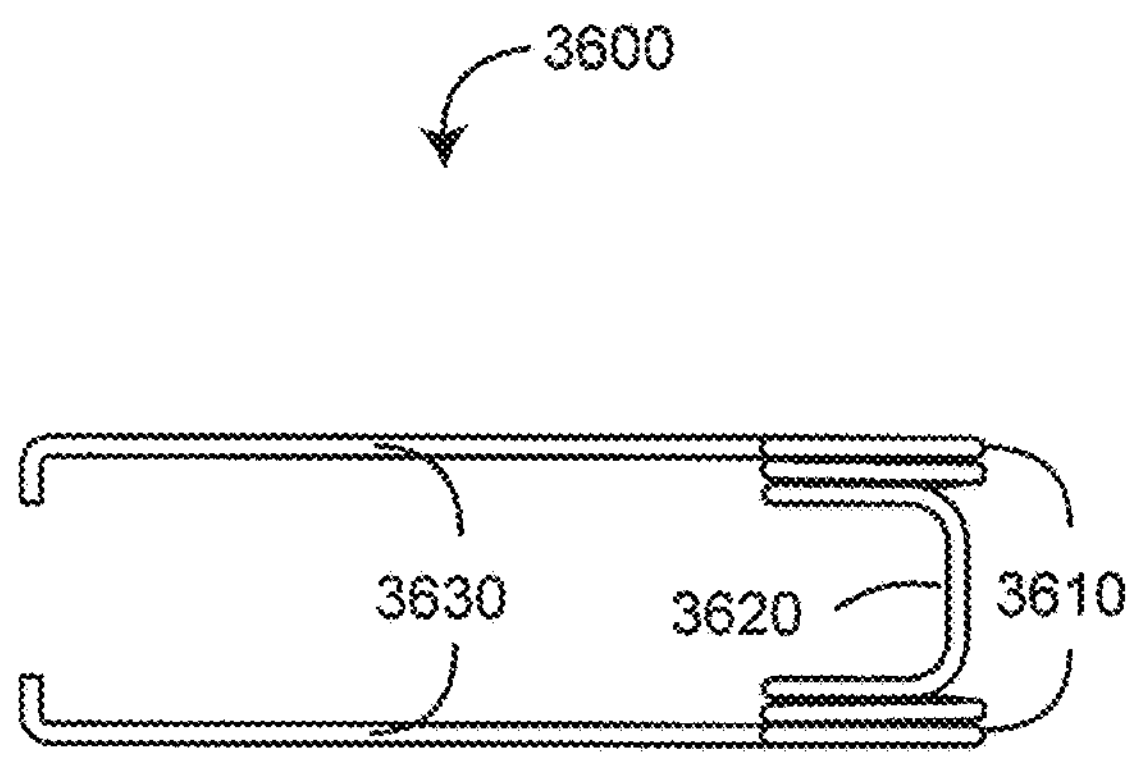

FIG. 36A

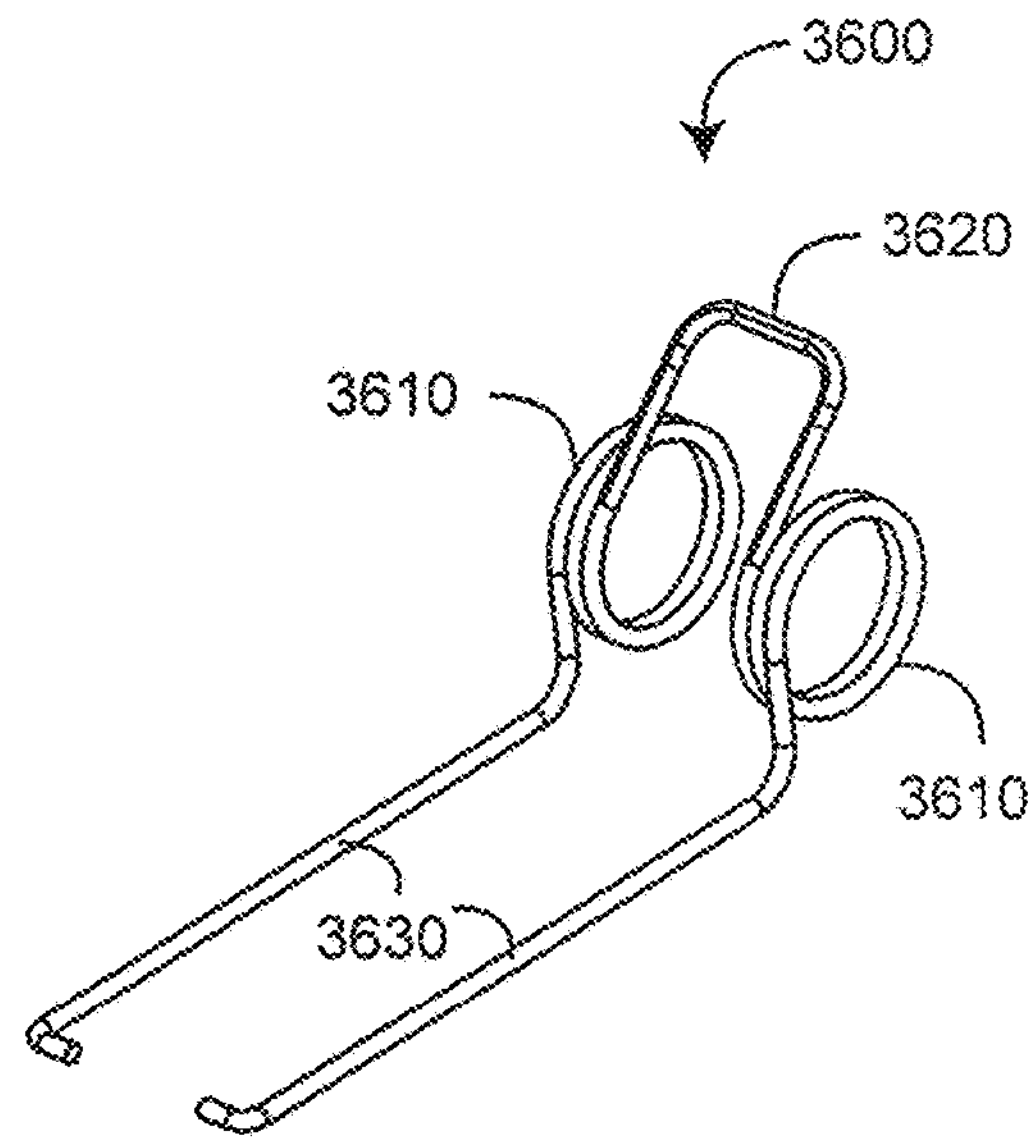

FIG. 36B

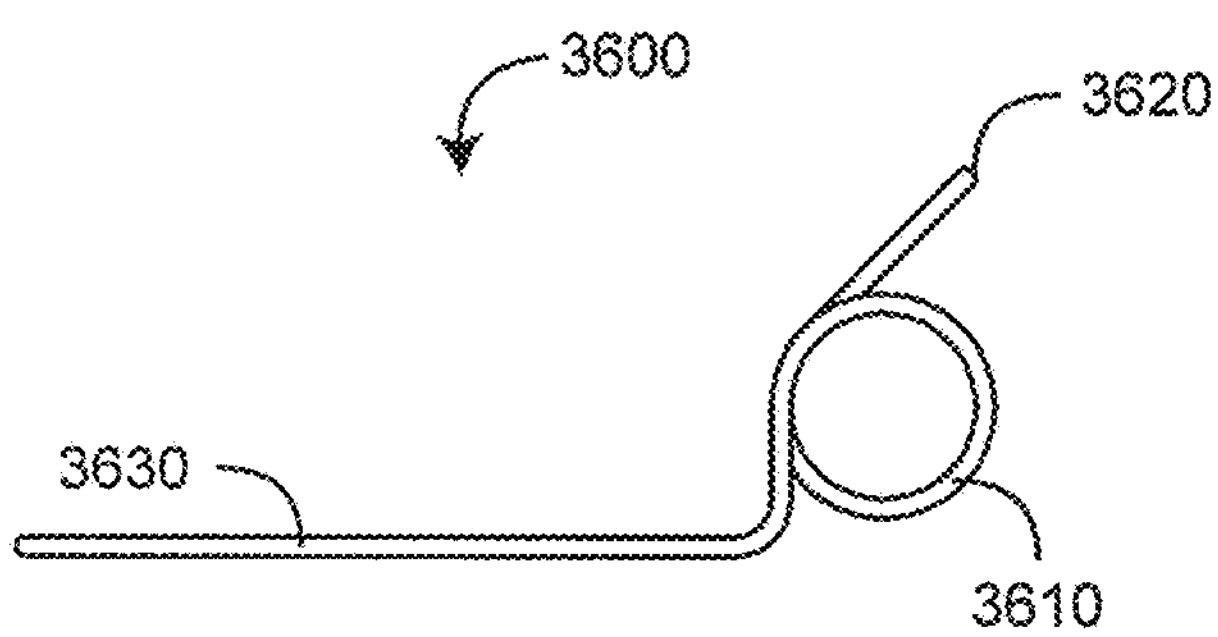

FIG. 36C

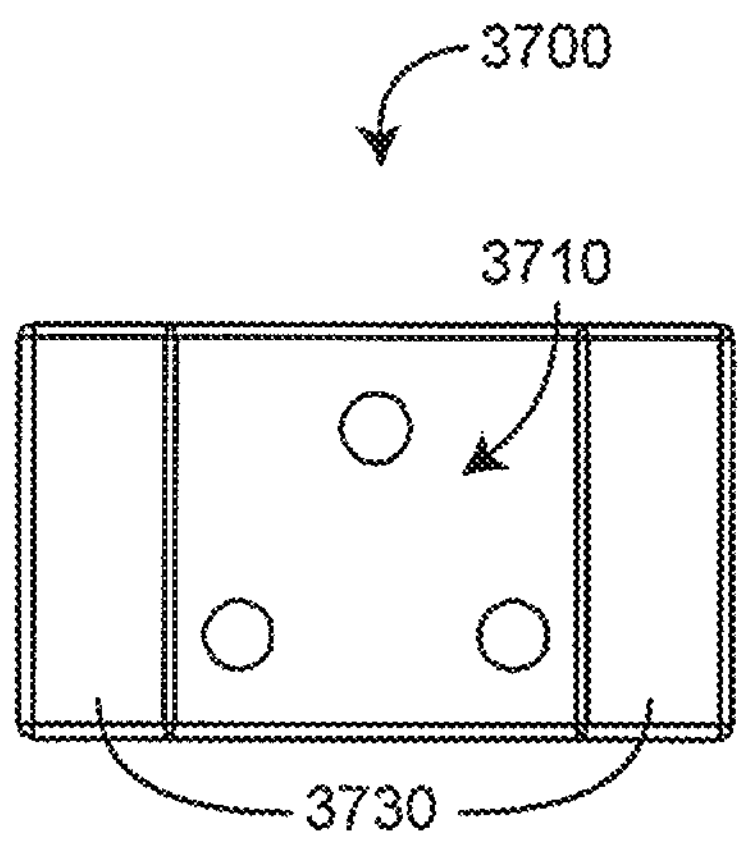

FIG. 37A

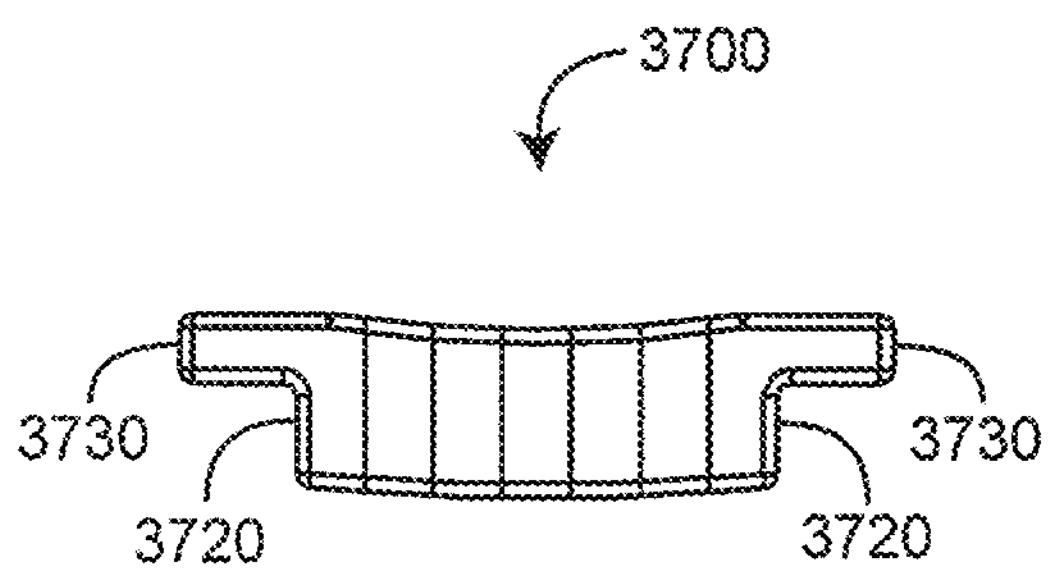

FIG. 37B



FIG. 37D

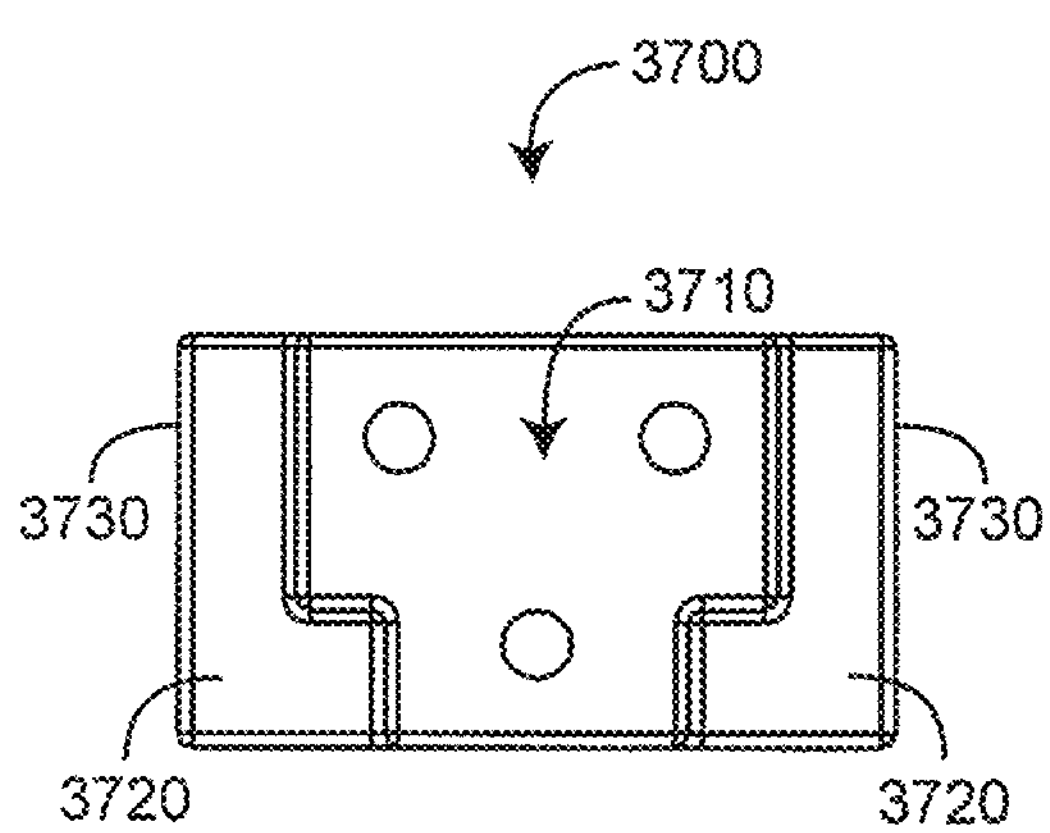

FIG. 37C



FIG. 38A

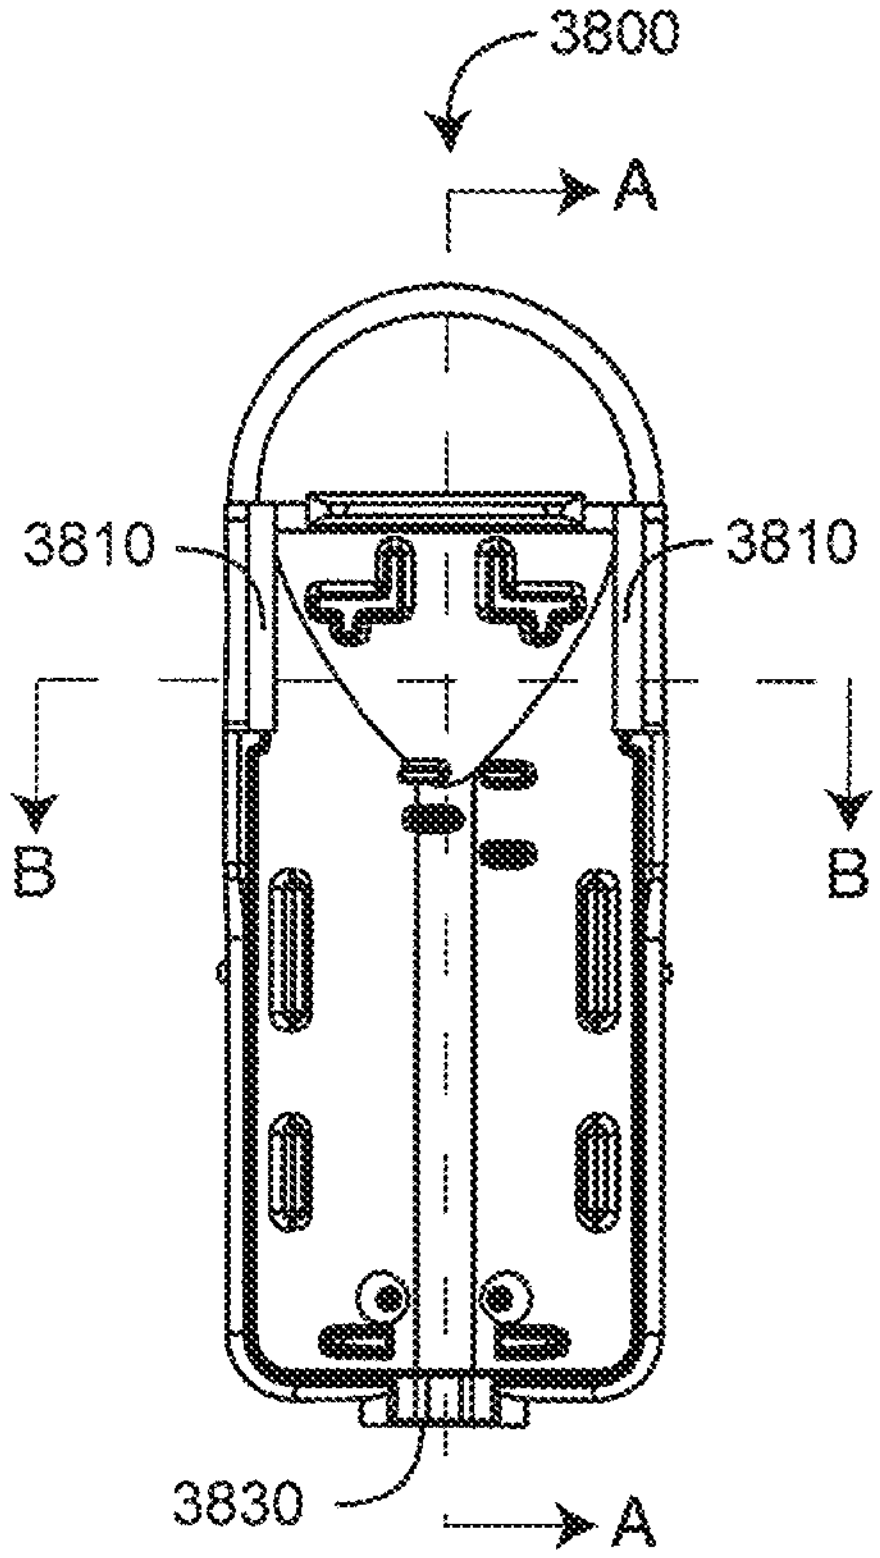

FIG. 38B



FIG. 38C

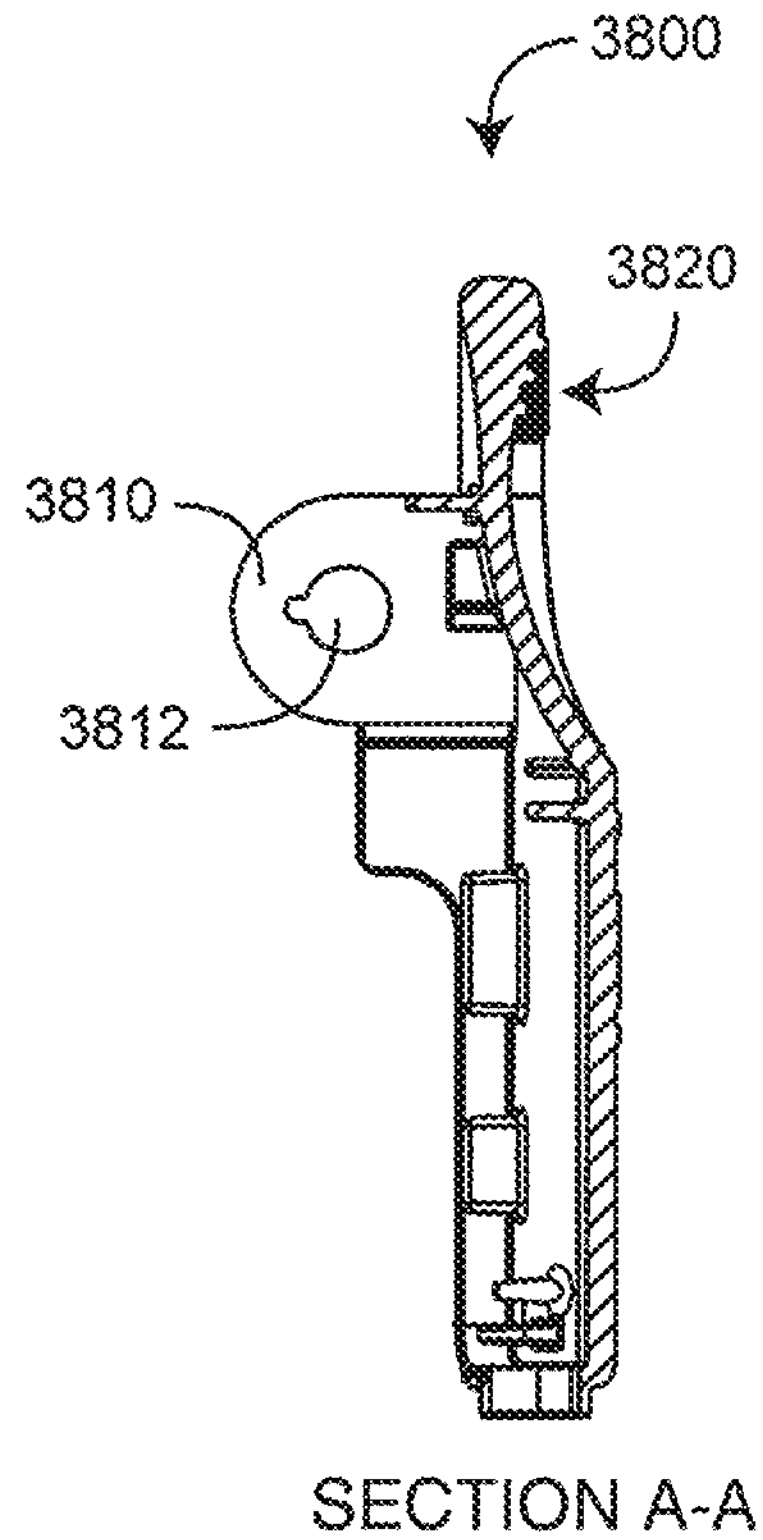

FIG. 38D



FIG. 39A

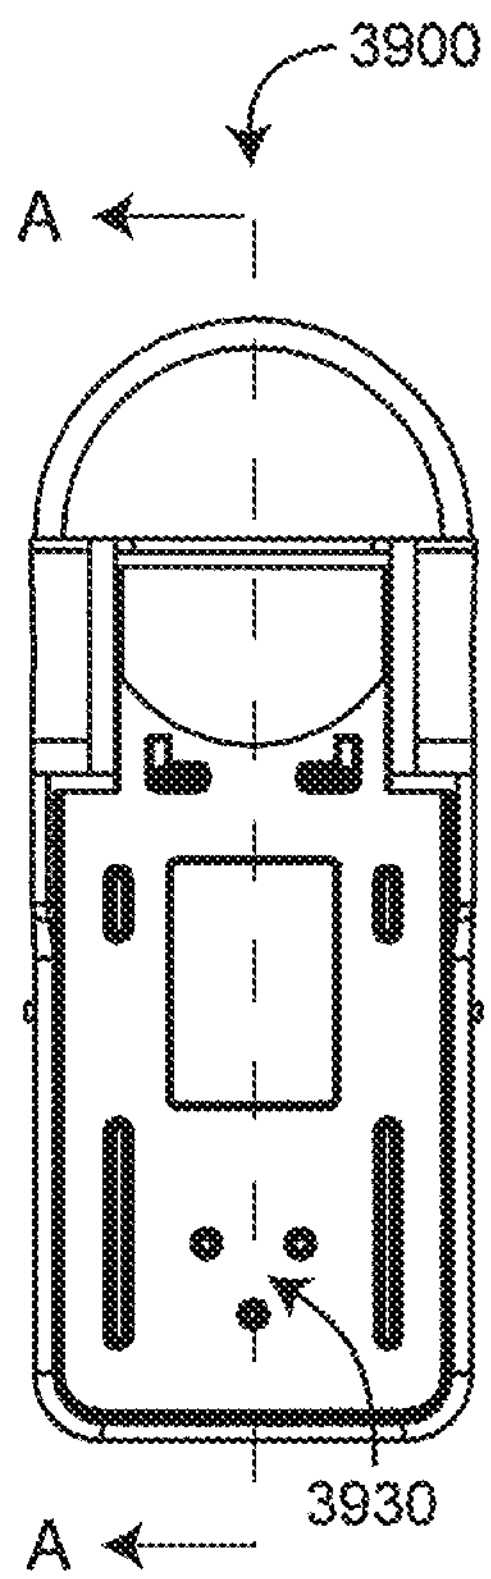

FIG.39B

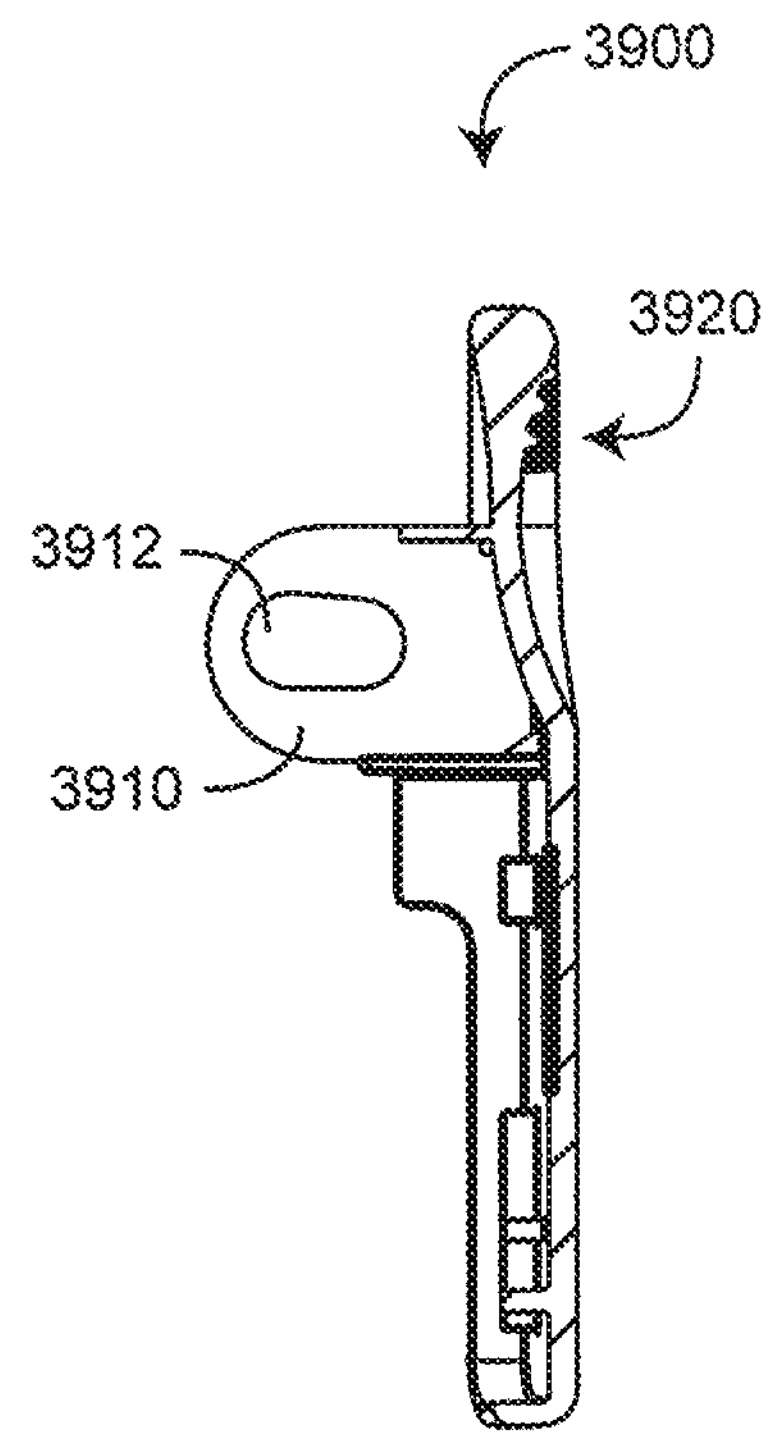

SECTION A-A

FIG. 39D

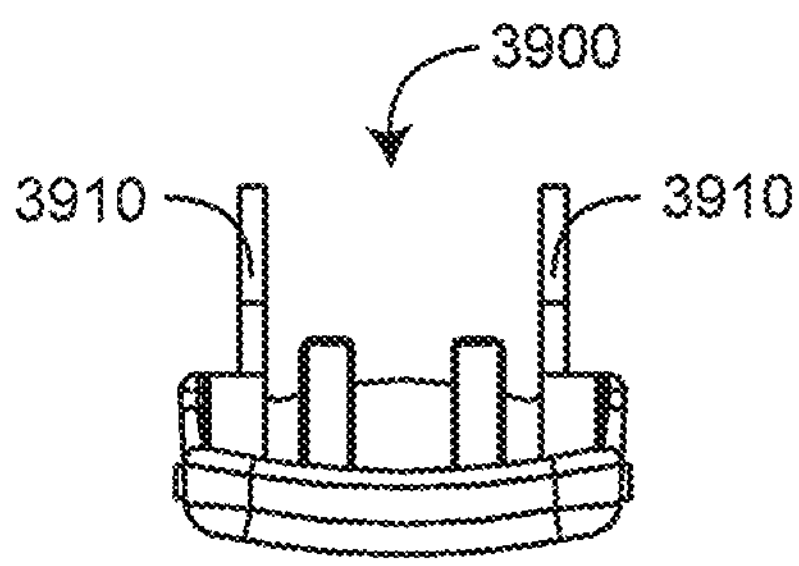

FIG. 39C

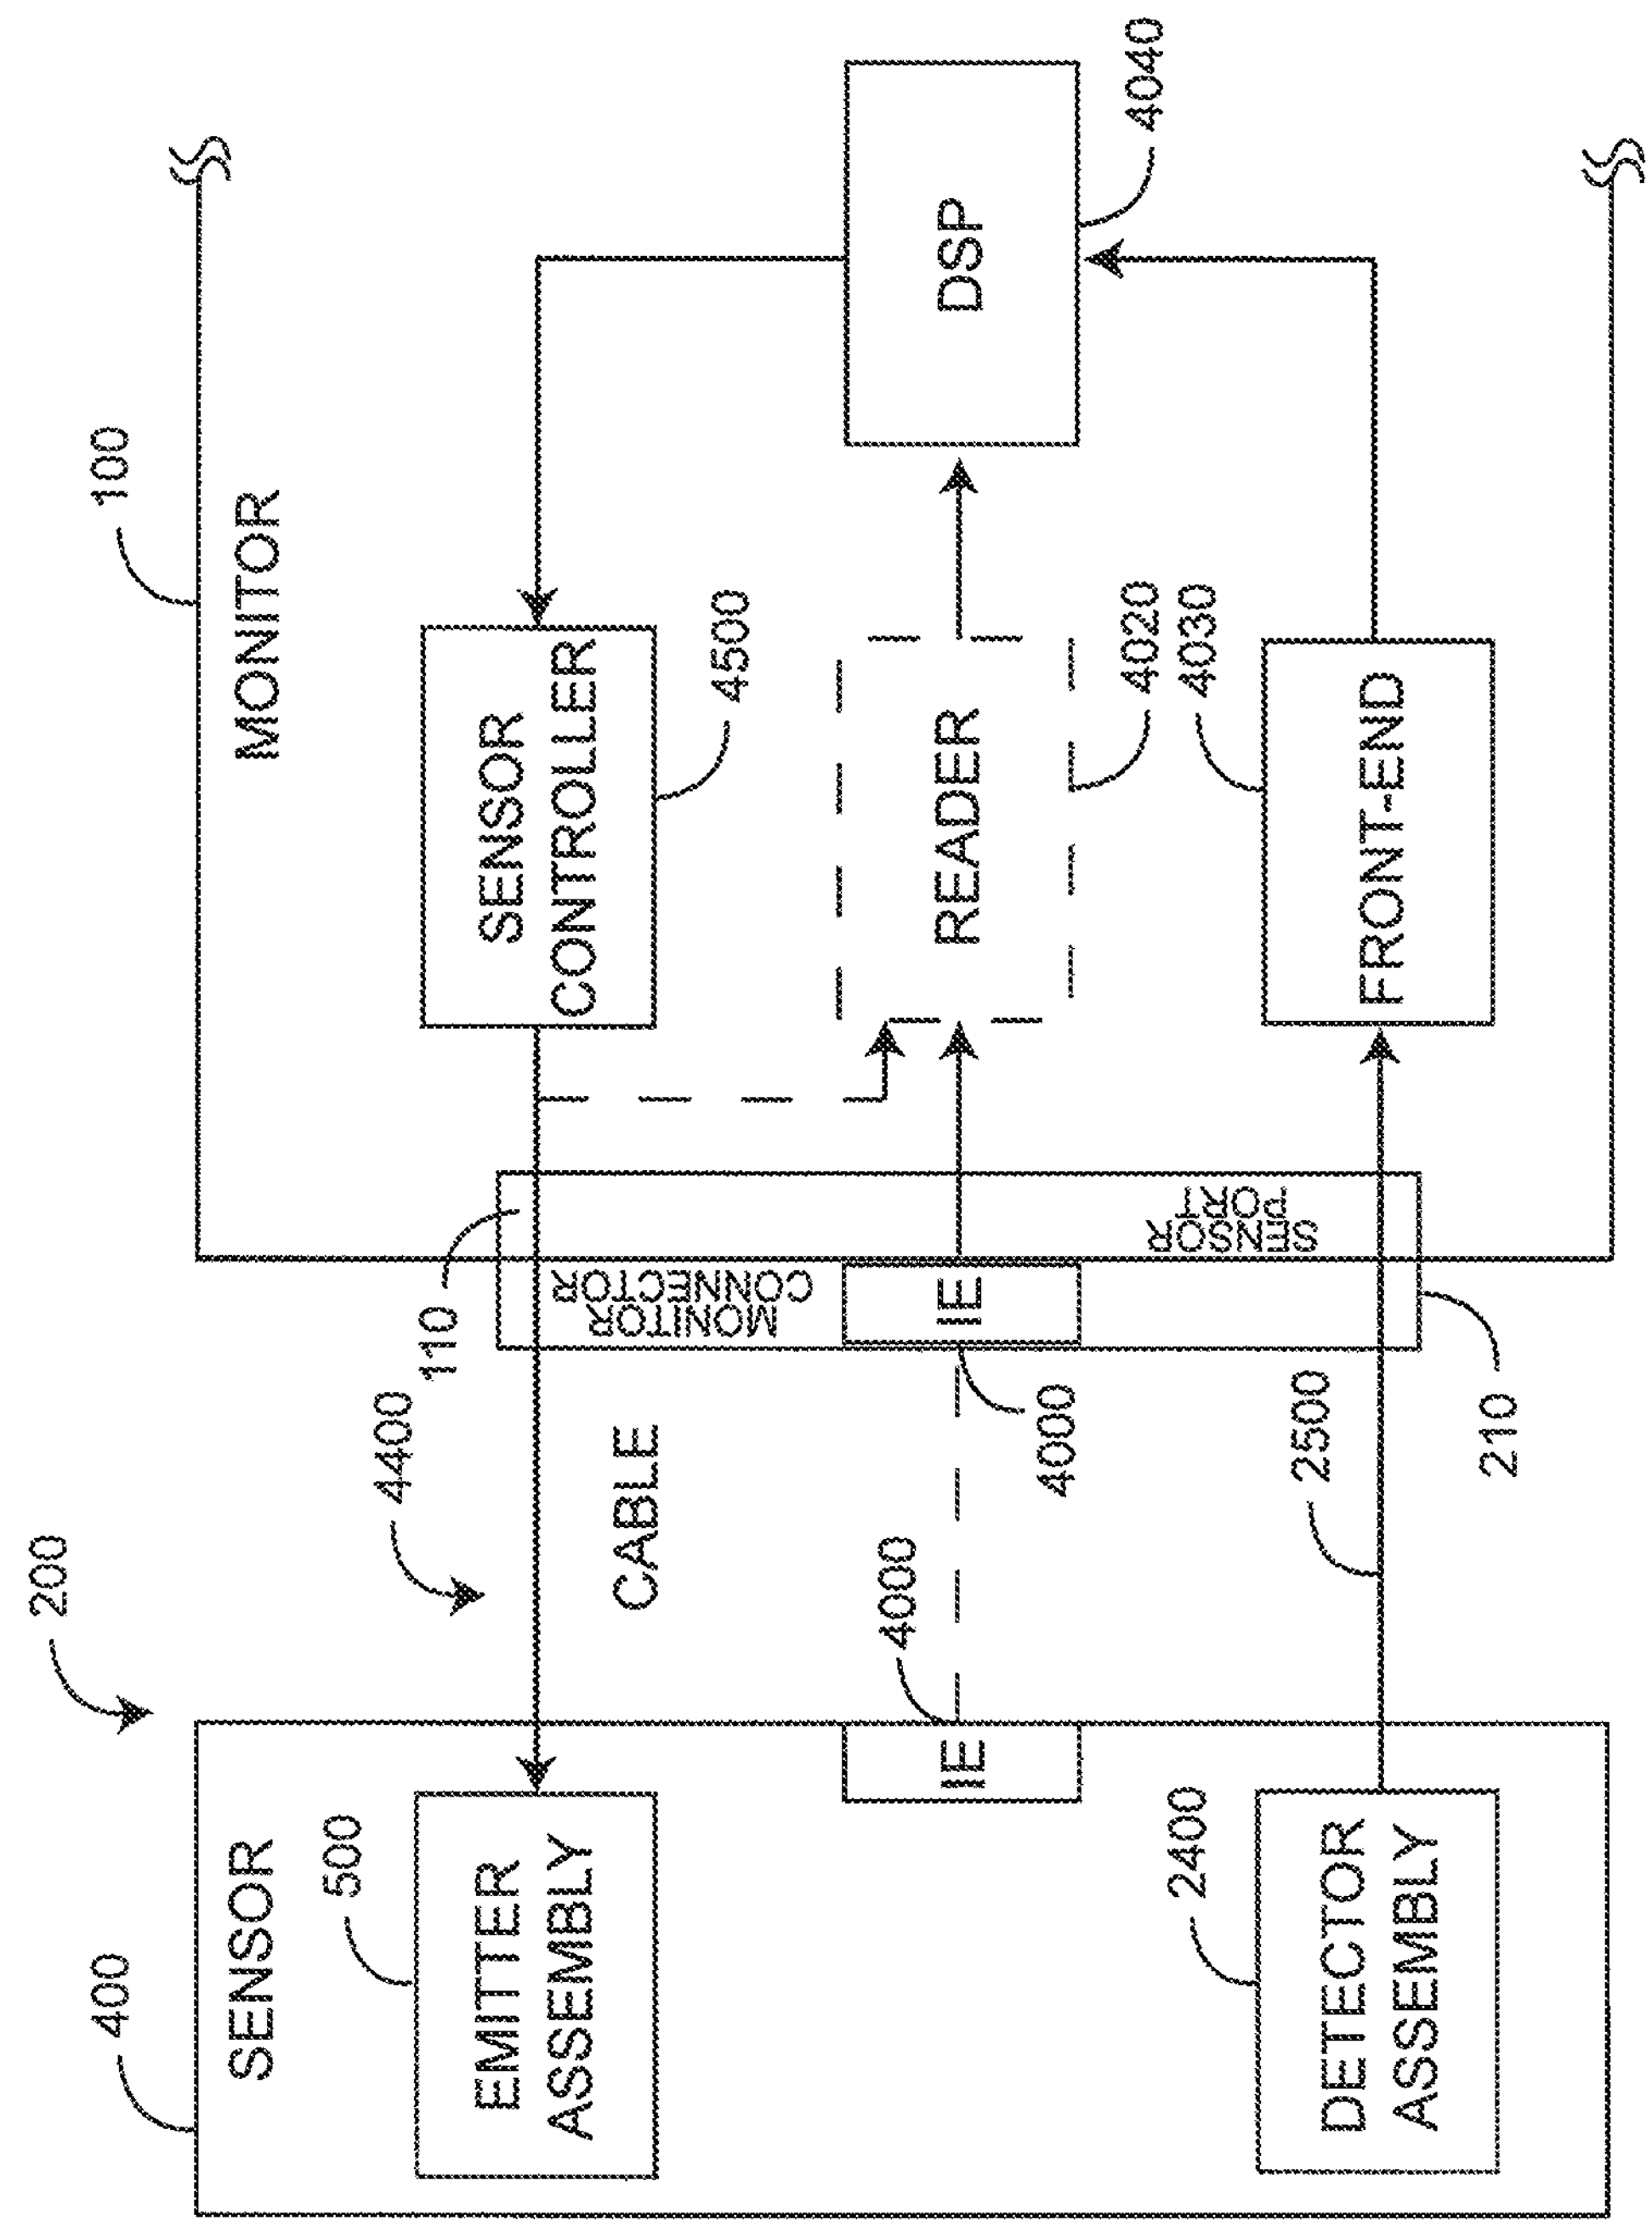
MONITOR
100
DSP
4040
SENSOR CONTROLLER
4500
READER
4020
4030
FRONT-END
MONITOR CONNECTOR
SENSOR PORT
IE
110
210
4000
2500
CABLE
4400
200
SENSOR
400
IE
4000
EMITTER ASSEMBLY
500
DETECTOR ASSEMBLY
2400

FIG. 40

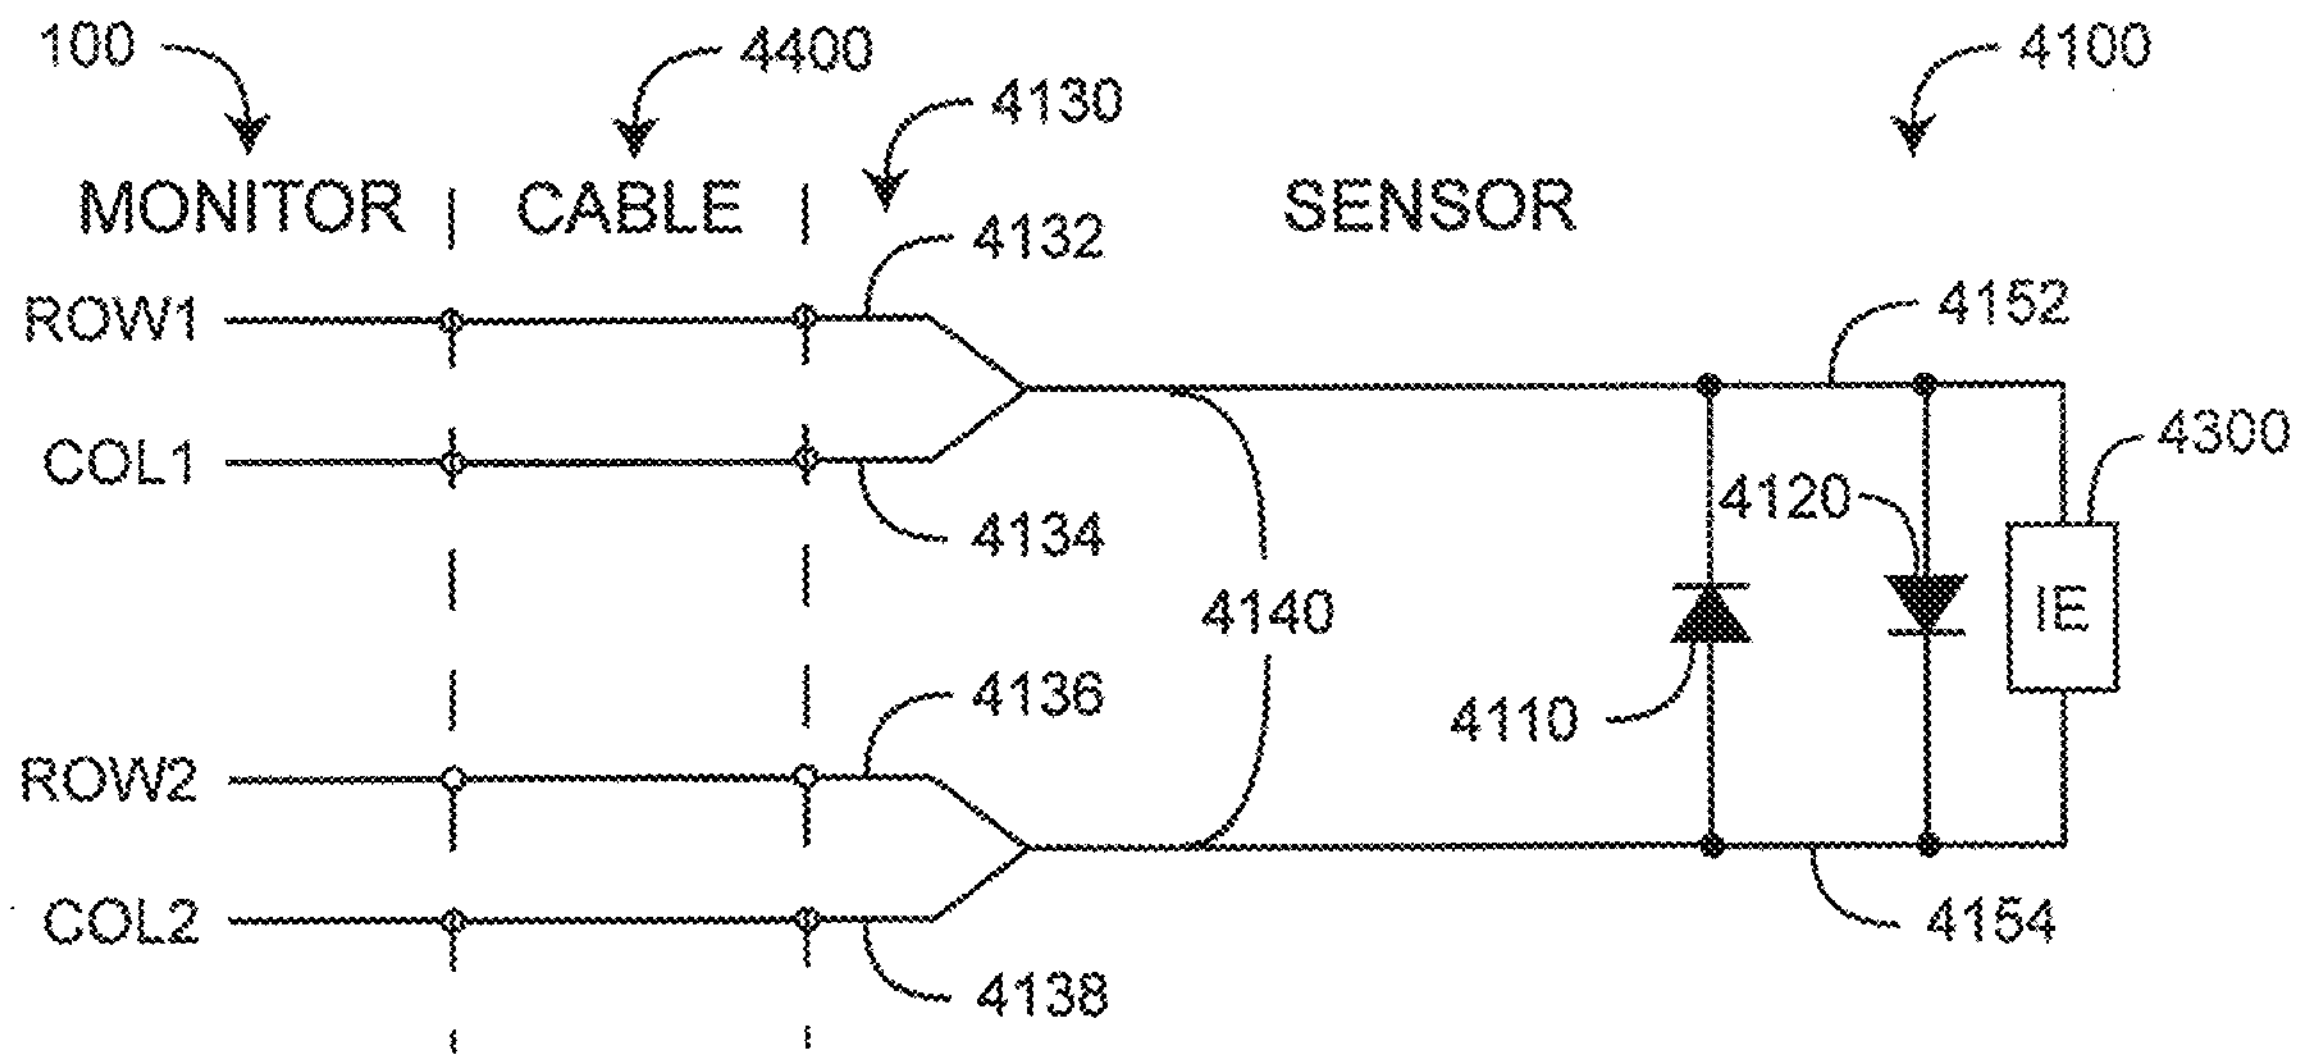

FIG. 41A

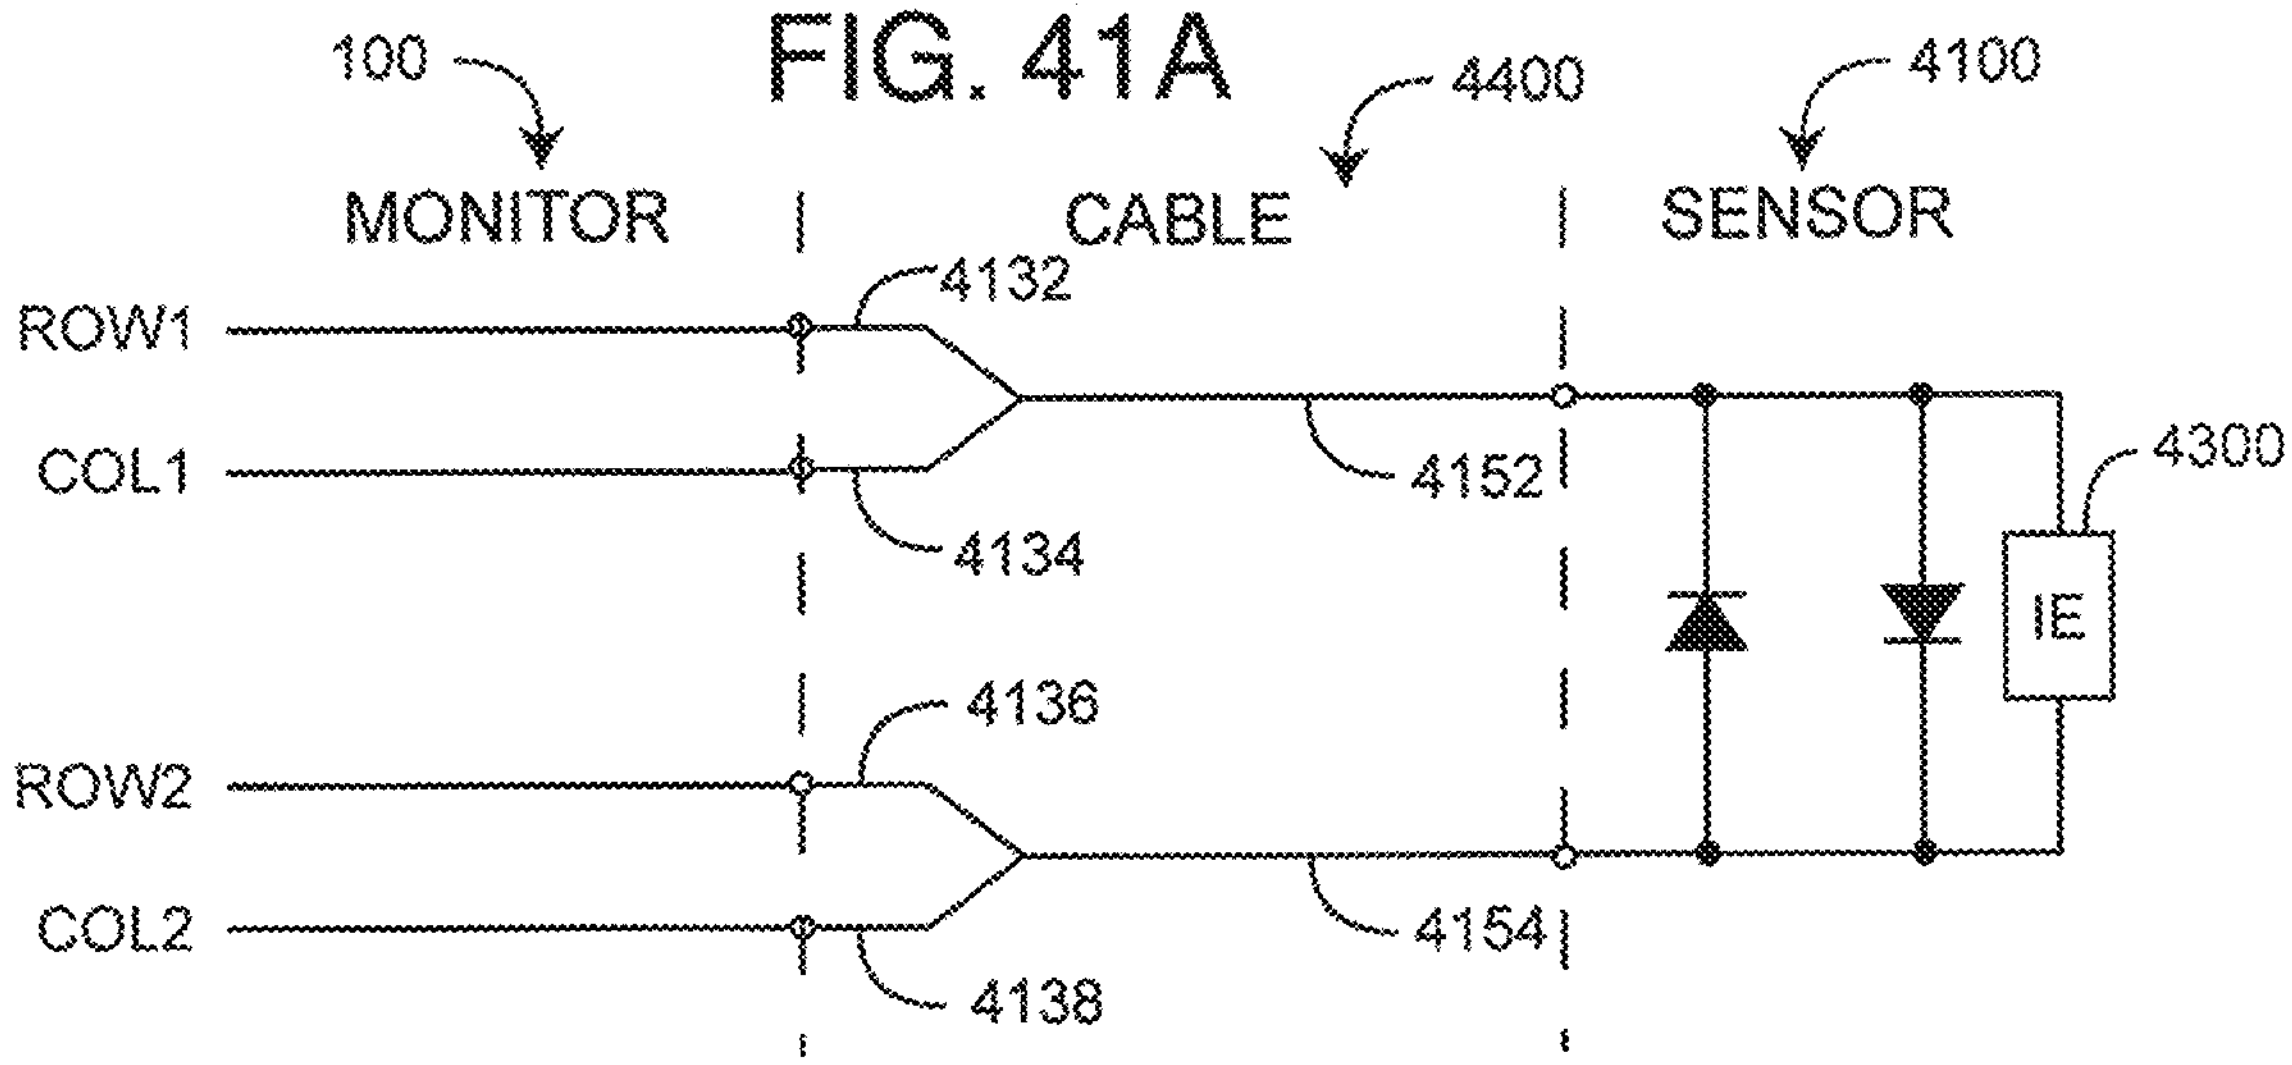

FIG. 41B

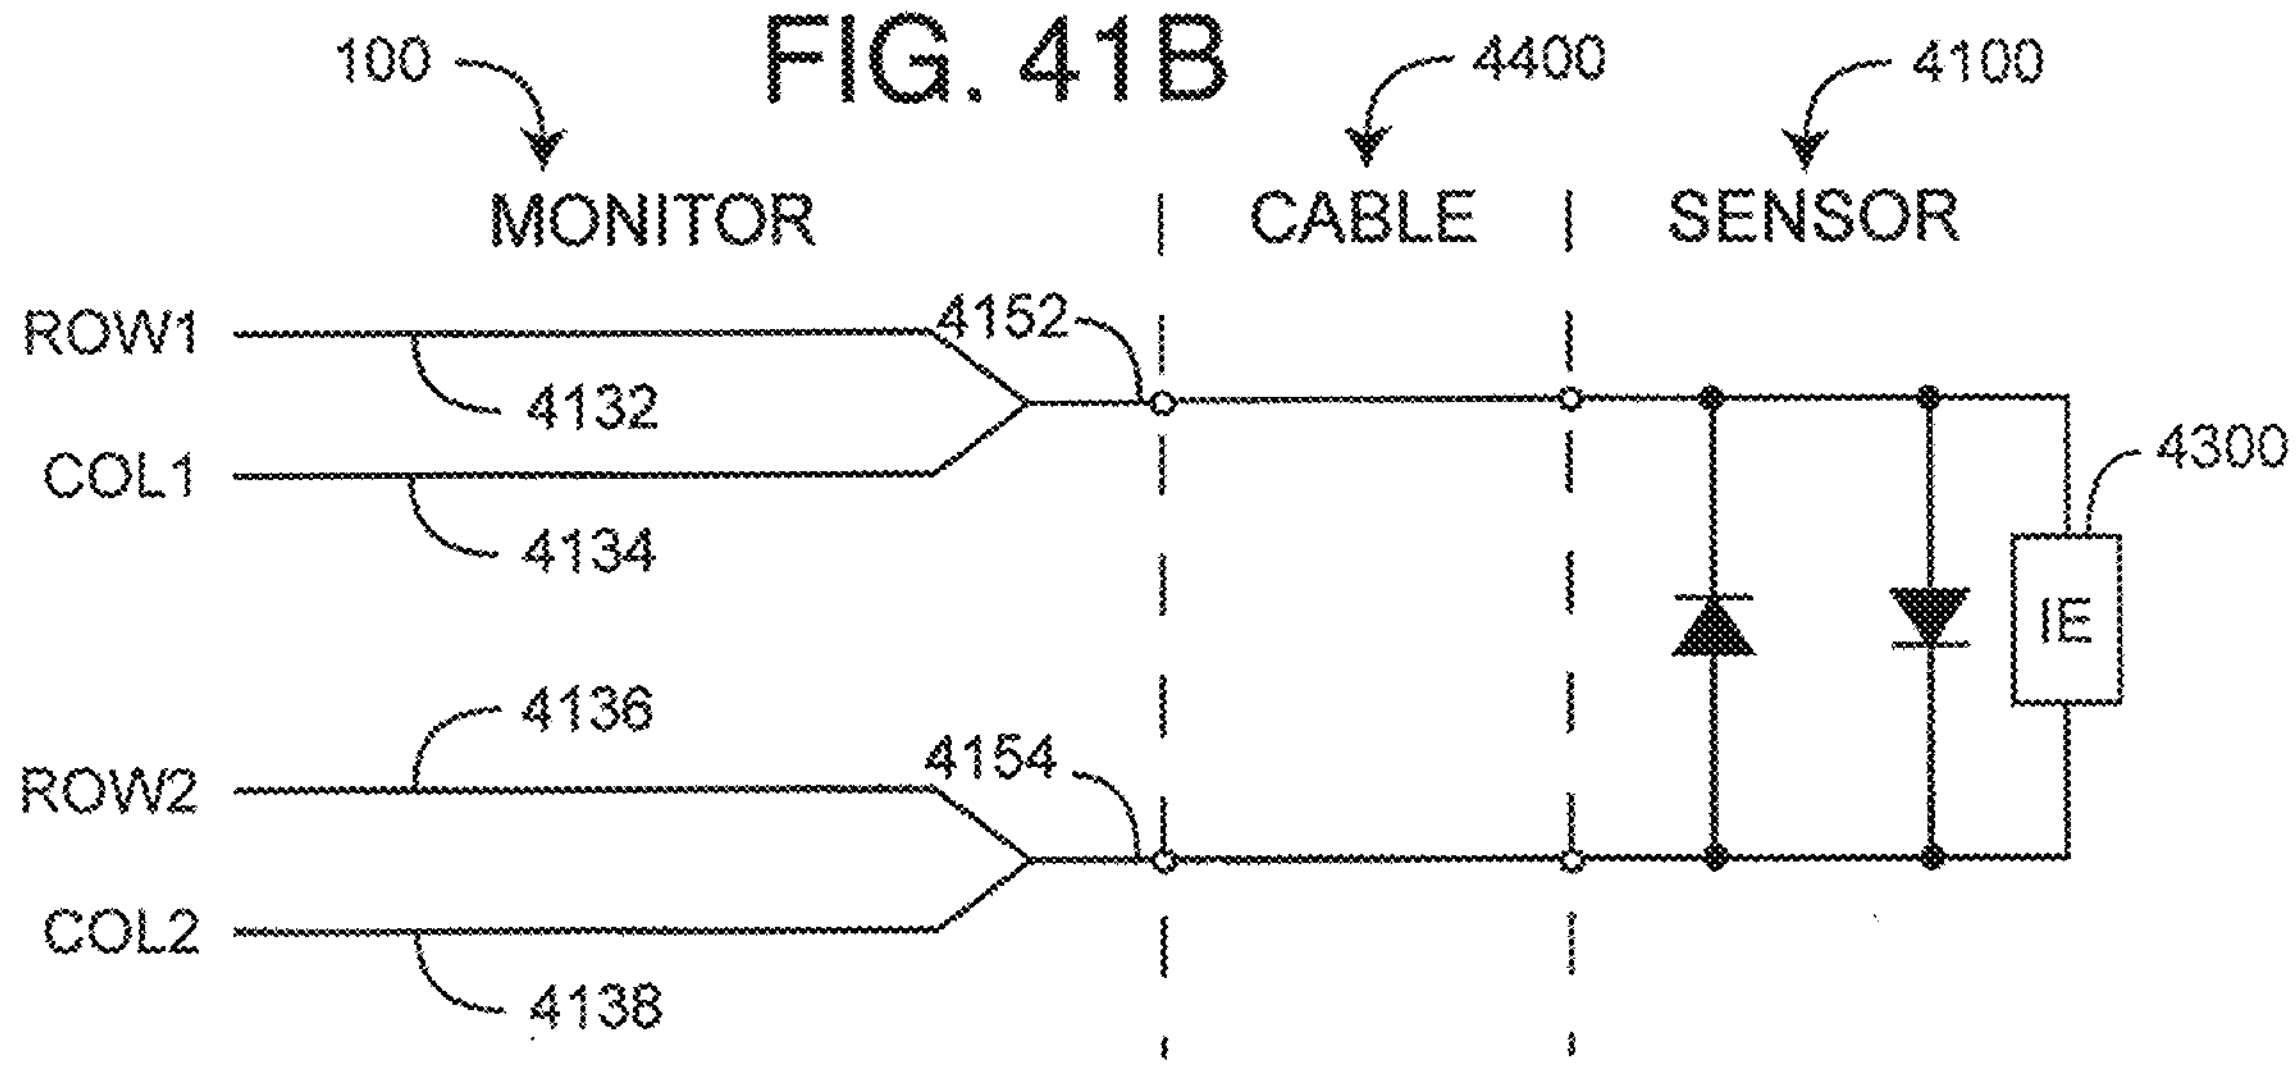

FIG. 41C

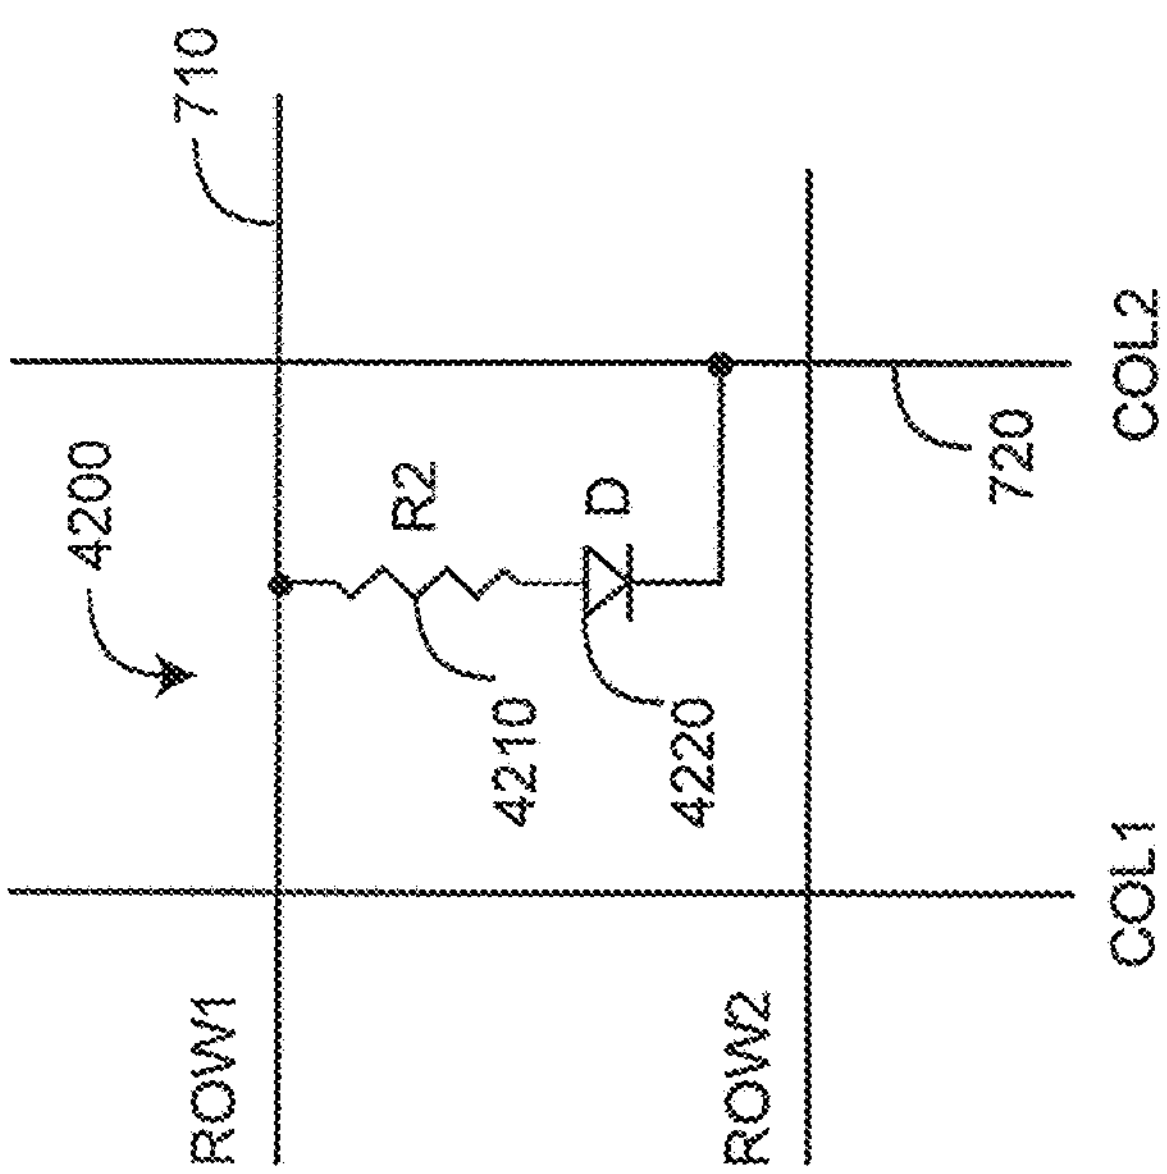

FIG. 42

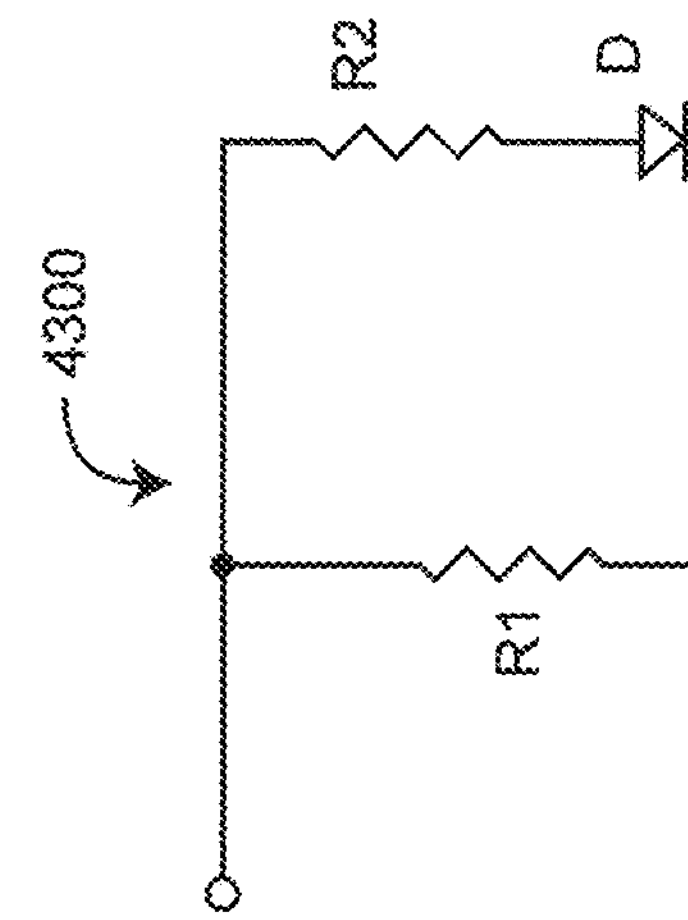

FIG. 43C

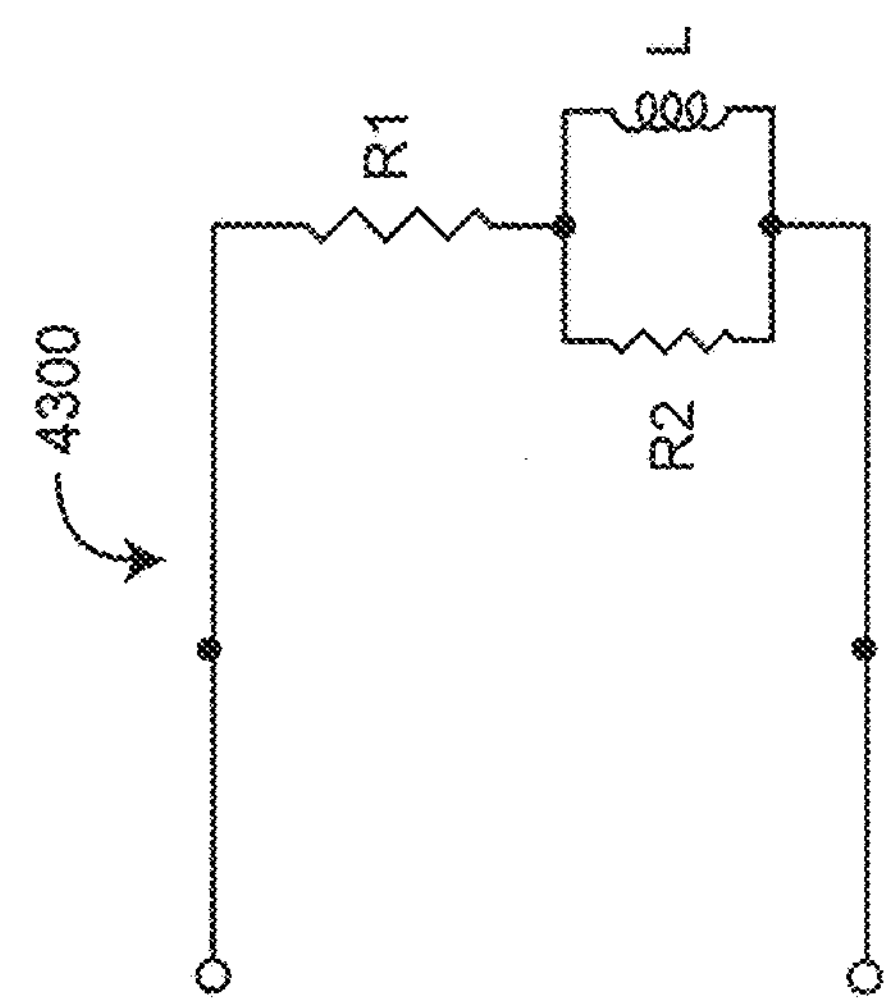

FIG. 43B

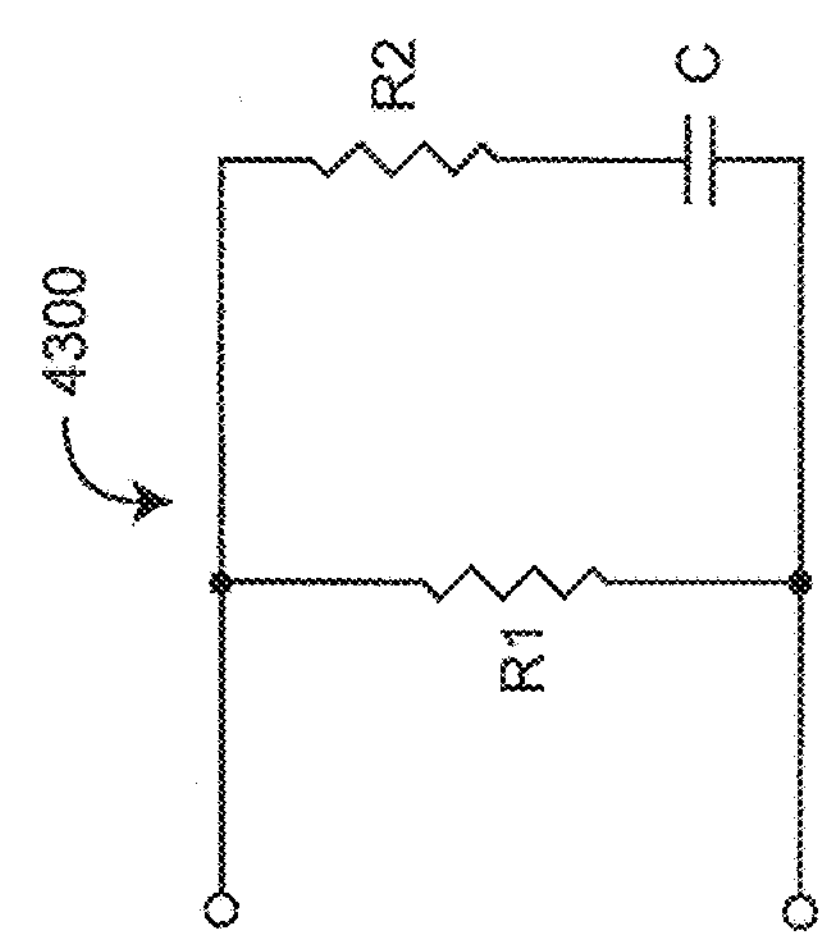

FIG. 43A

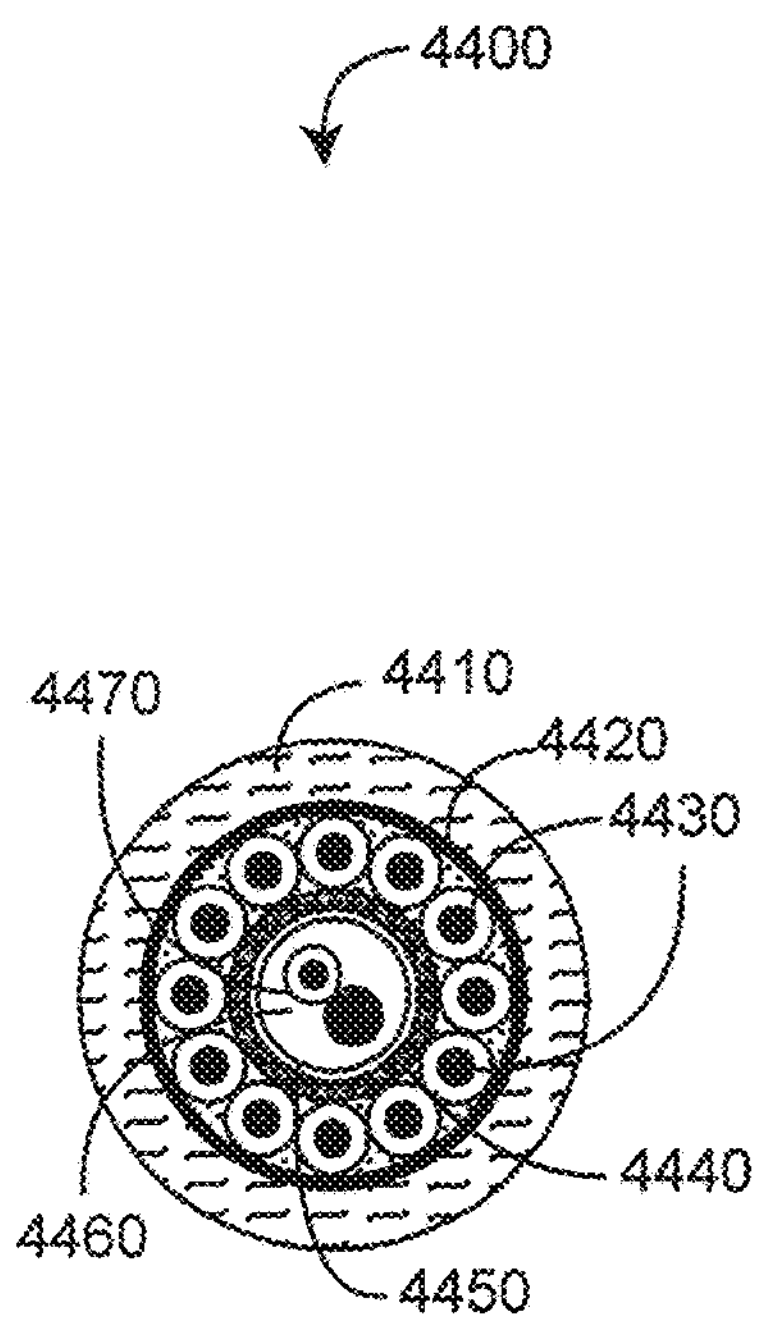

FIG. 44A

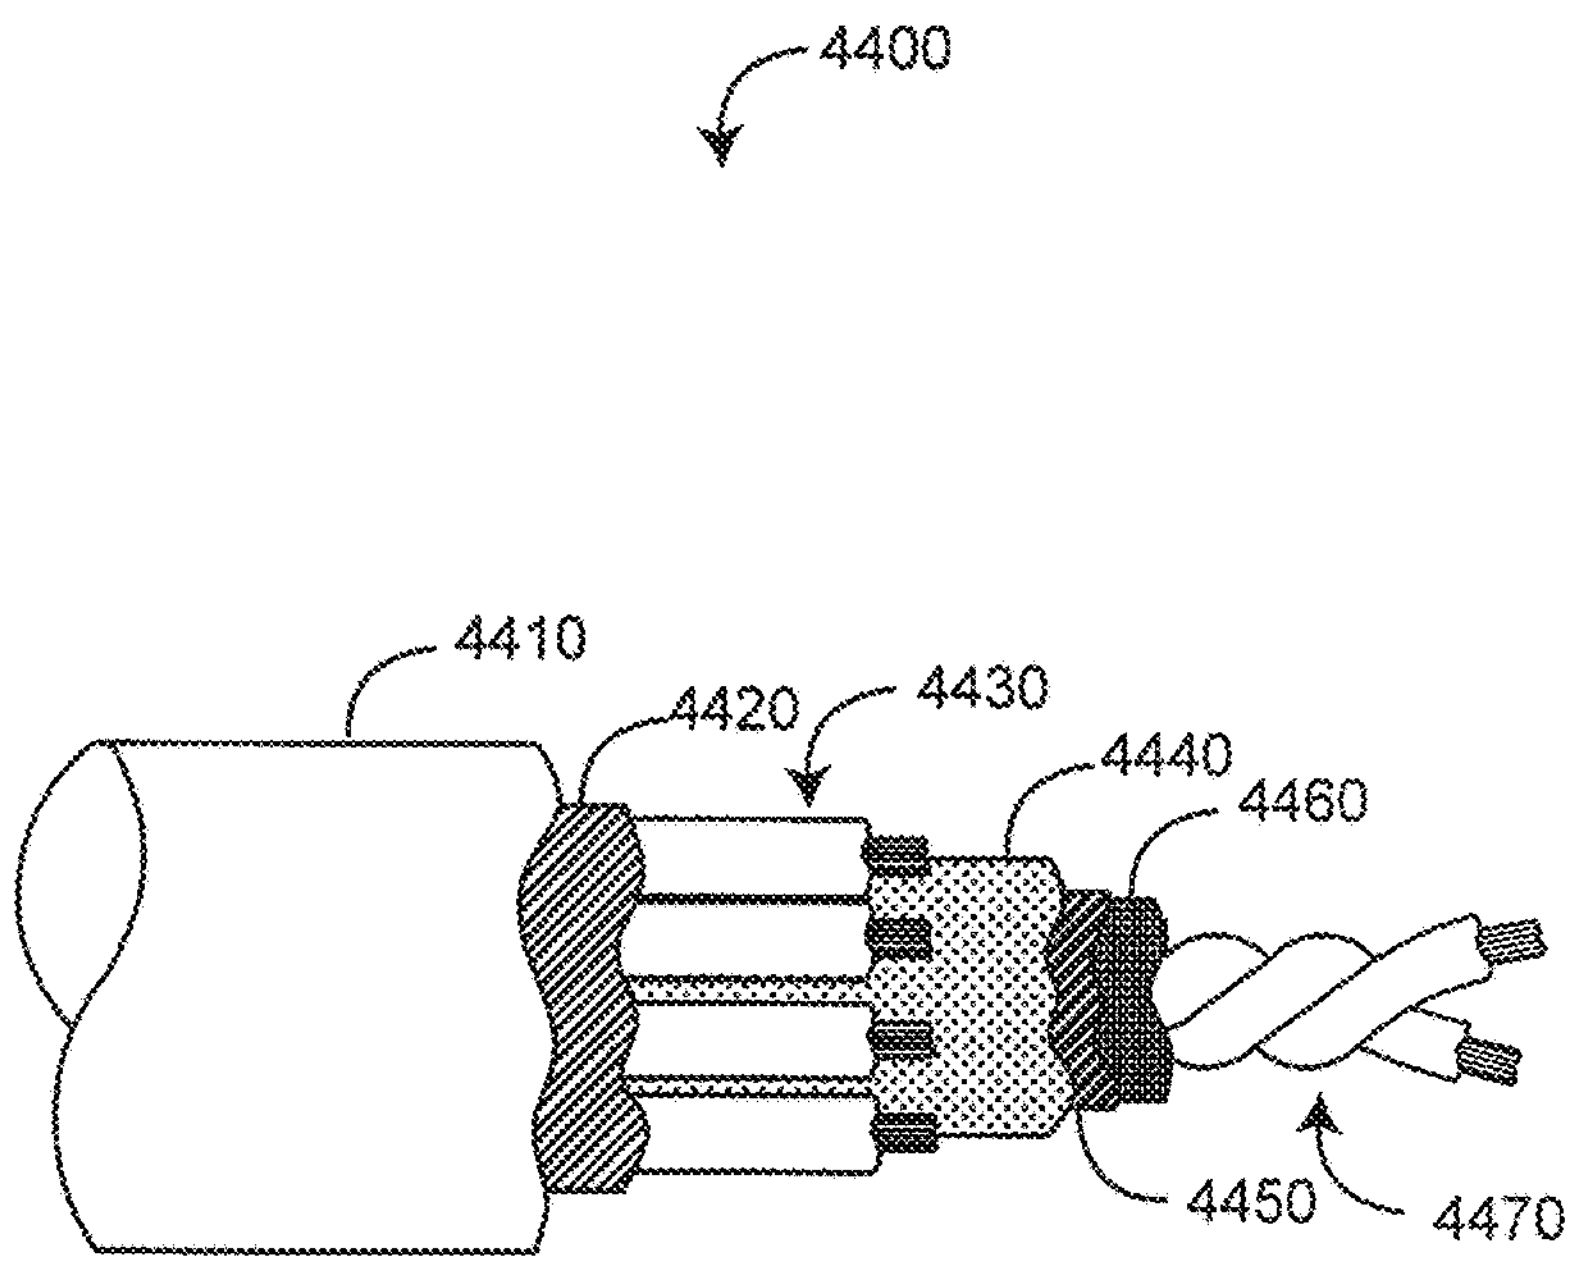

FIG. 44B

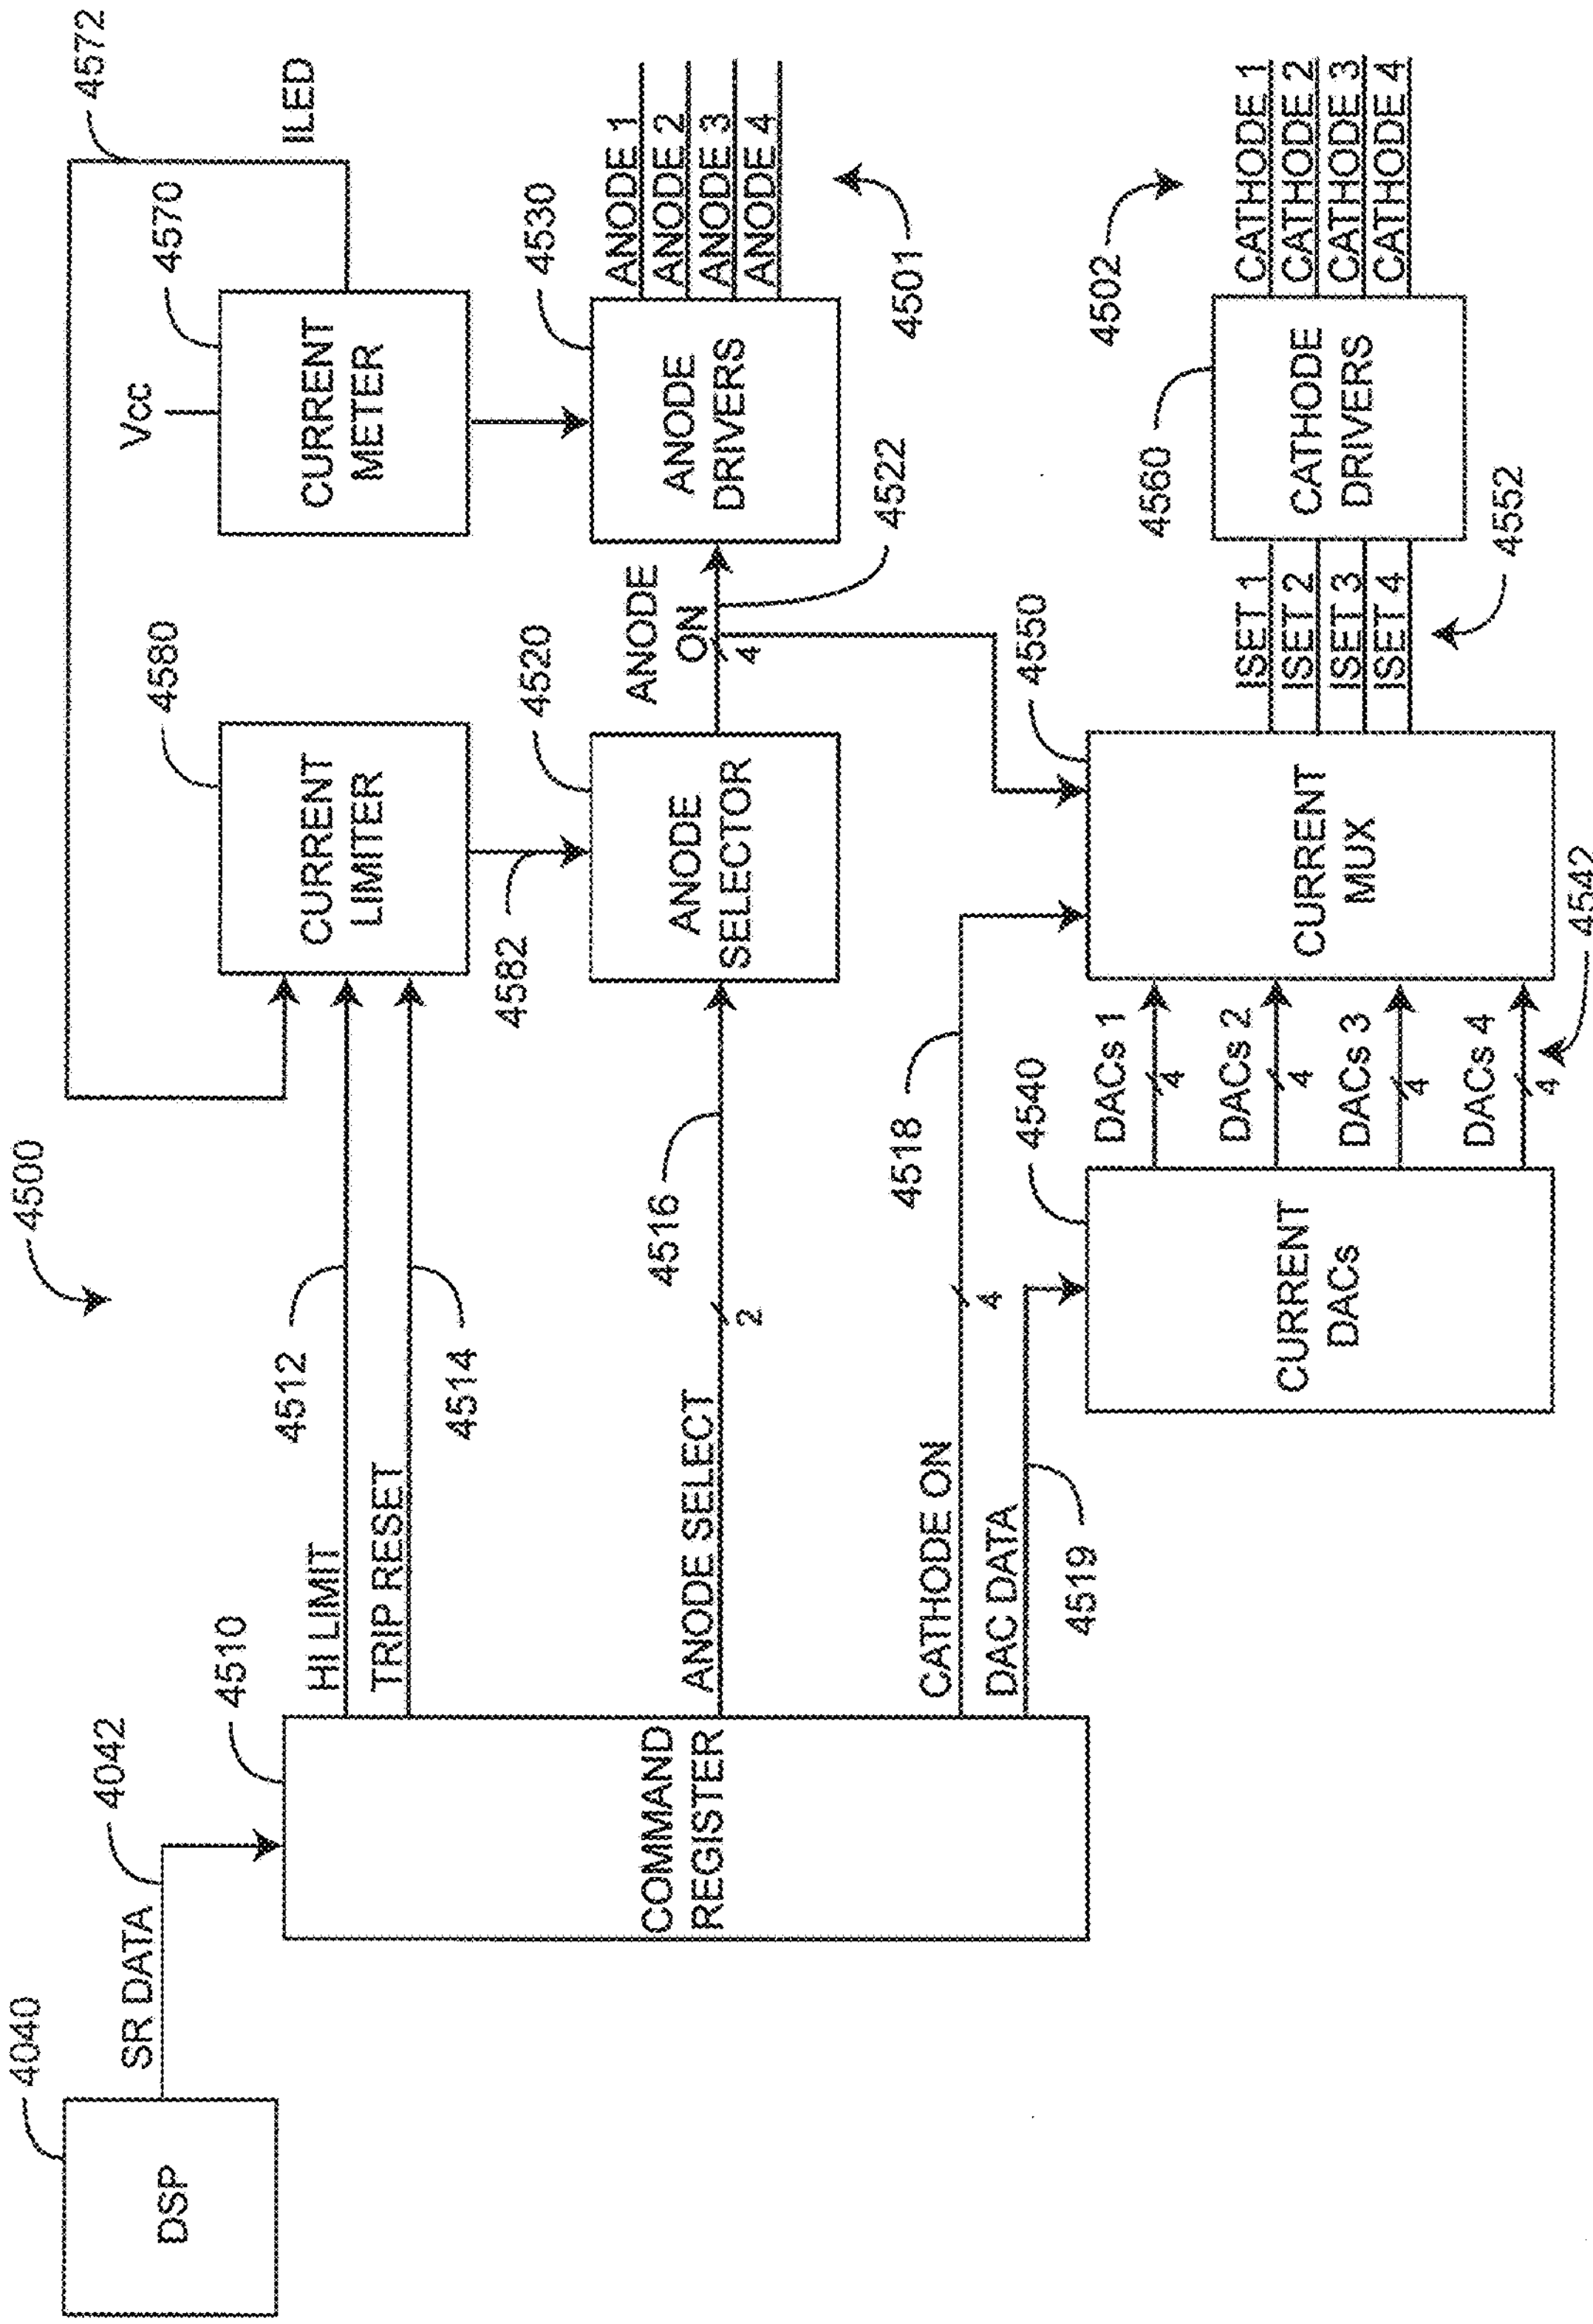
DSP
SR DATA
COMMAND REGISTER
HI LIMIT
TRIP RESET
ANODE SELECT
CATHODE ON
DAC DATA
CURRENT LIMITER
CURRENT METER
Vcc
ILED
ANODE SELECTOR
ANODE ON
ANODE DRIVERS
ANODE 1
ANODE 2
ANODE 3
ANODE 4
CURRENT DACs
DACs 1
DACs 2
DACs 3
DACs 4
CURRENT MUX
ISET 1
ISET 2
ISET 3
ISET 4
CATHODE DRIVERS
CATHODE 1
CATHODE 2
CATHODE 3
CATHODE 4
4040
4042
4500
4501
4502
4510
4512
4514
4516
4518
4519
4520
4522
4530
4540
4542
4550
4552
4560
4570
4572
4580
4582

FIG. 45

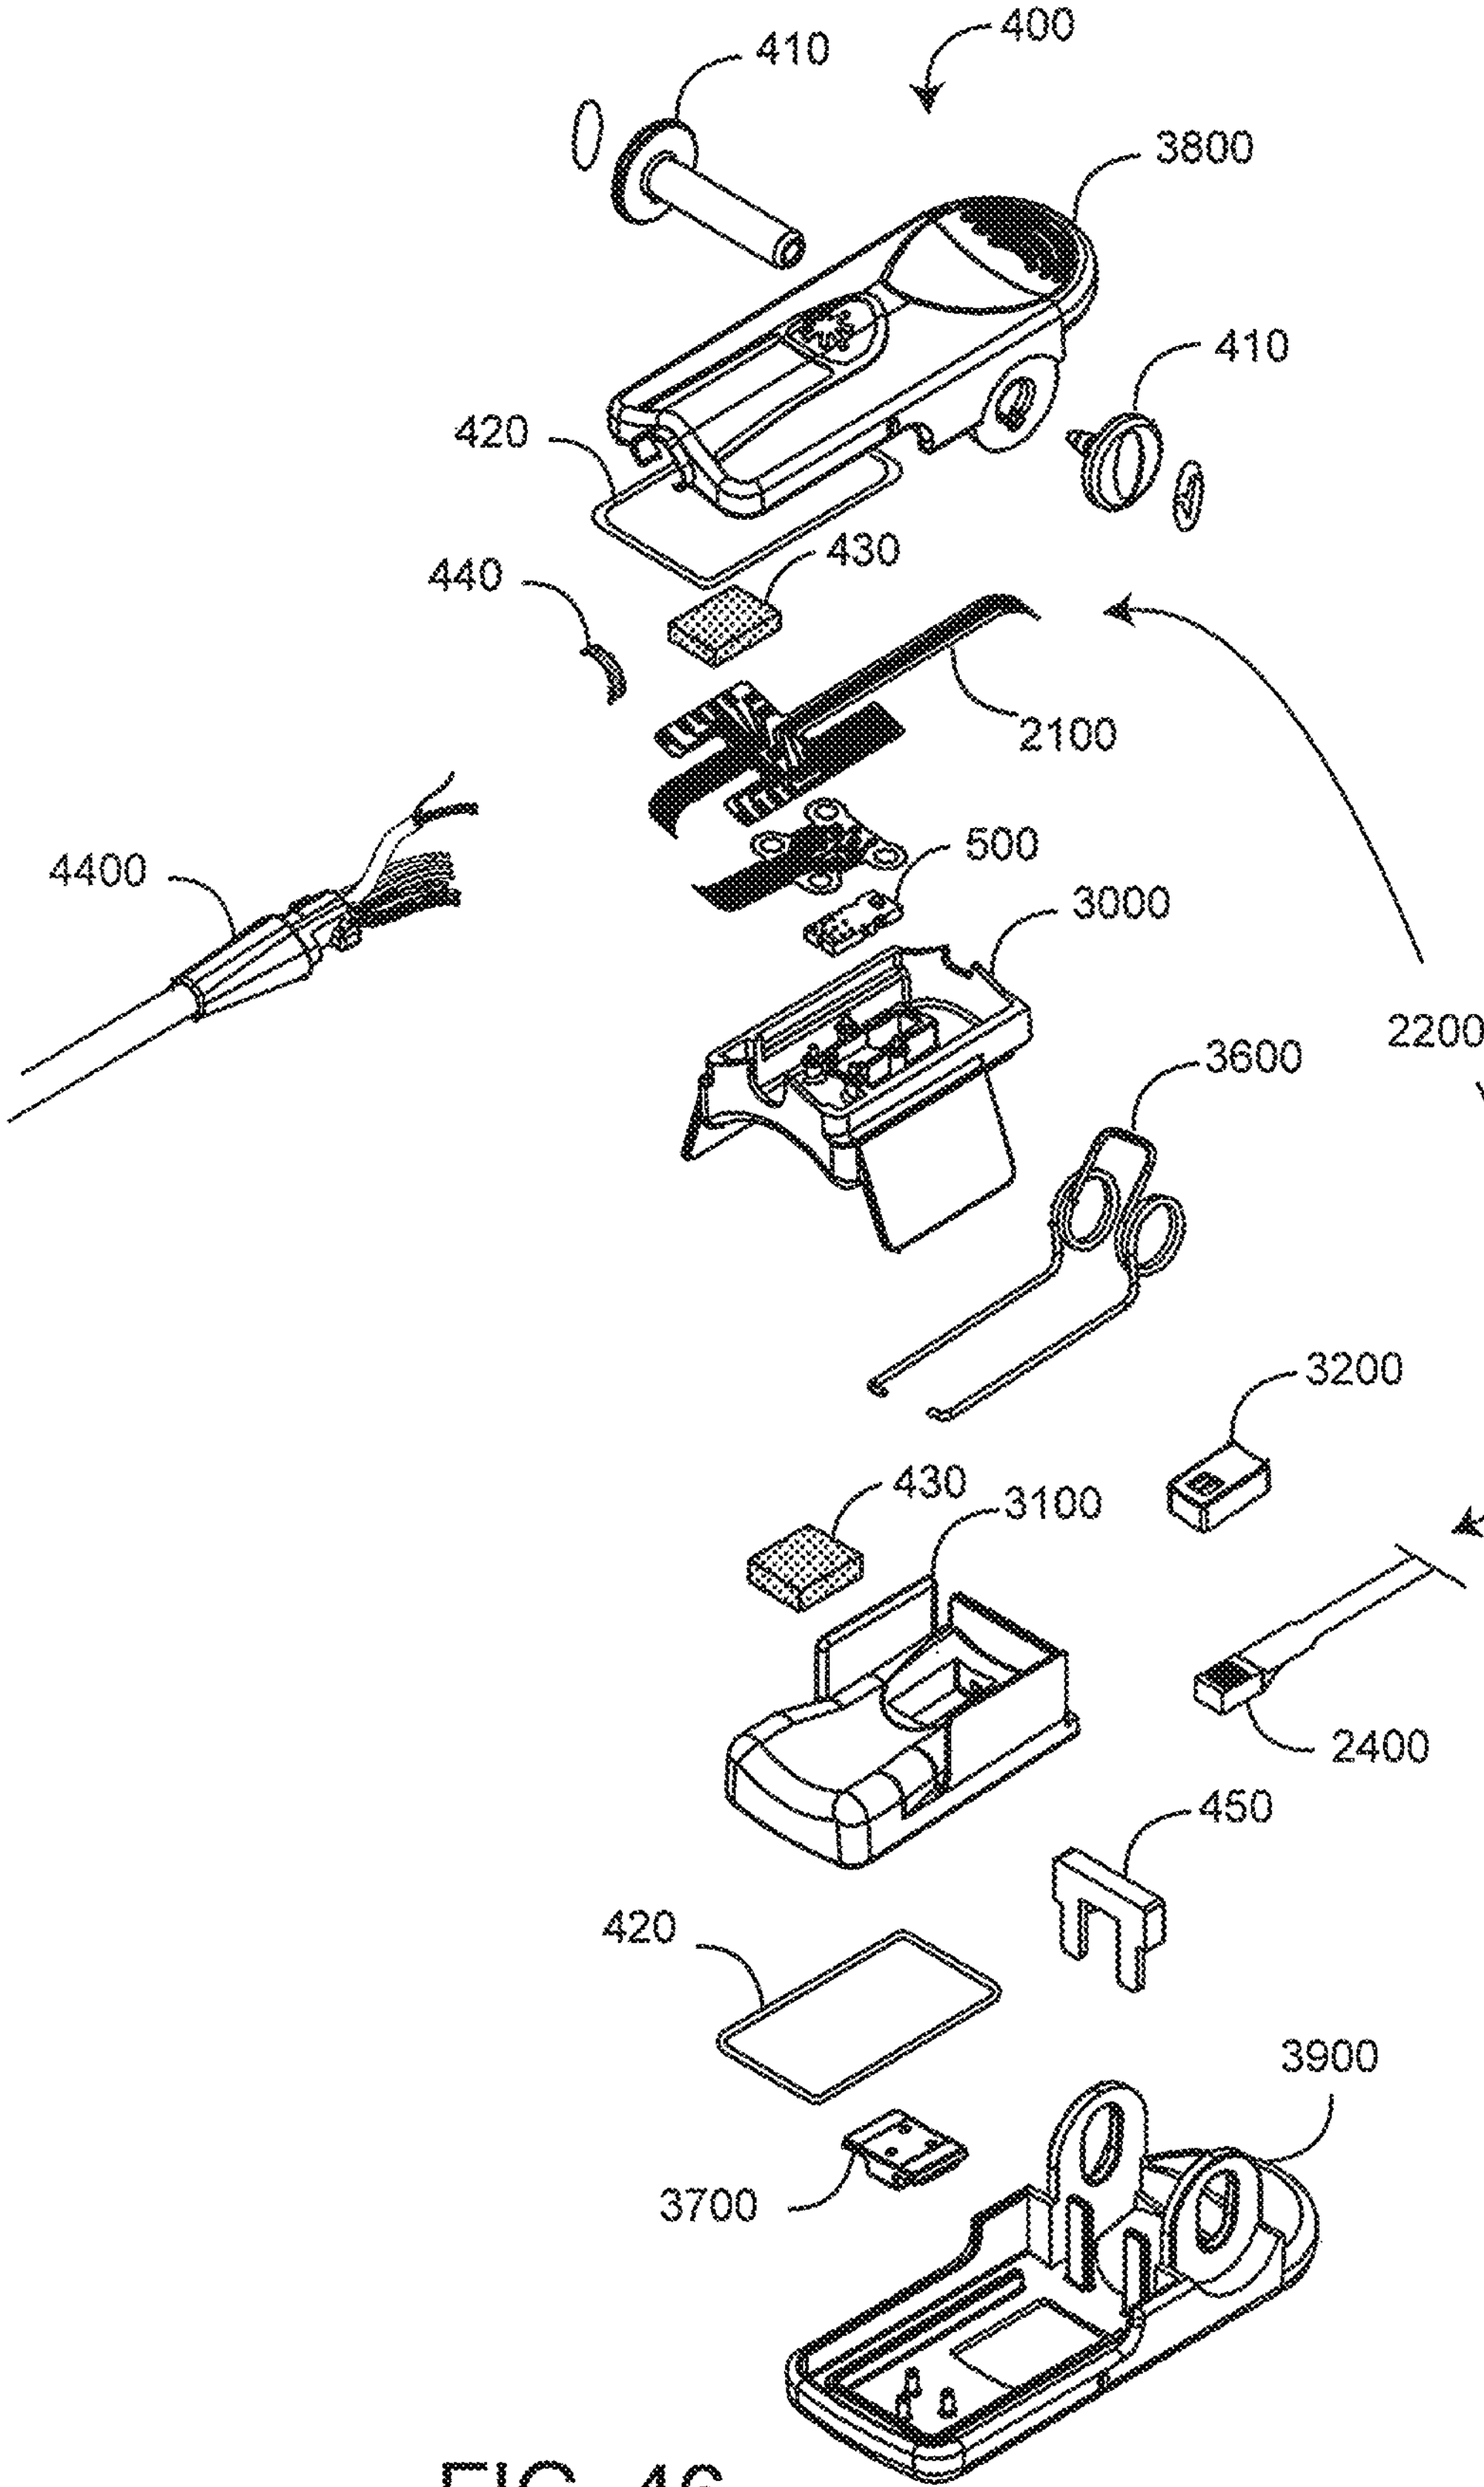
400
410
3800
410
420
440
430
2100
4400
500
3000
2200
3600
3200
430
3100
2400
450
420
3900
3700

FIG. 46

MULTIPLE WAVELENGTH SENSOR EMITTERS

PRIORITY CLAIM

The present application is a continuation of U.S. patent application Ser. No. 16/437,611, entitled "Multiple Wavelength Sensor Emitters," filed Jun. 11, 2019, which is a continuation of U.S. patent application Ser. No. 15/694,541, entitled "Multiple Wavelength Sensor Emitters," filed Sep. 1, 2017, now issued as U.S. Pat. No. 10,327,683, which is a continuation of U.S. patent application Ser. No. 14/472,760, entitled "Multiple Wavelength Sensor Emitters," filed Aug. 29, 2014, now issued as U.S. Pat. No. 9,750,443, which is a continuation of U.S. patent application Ser. No. 13/776,065, entitled "Multiple Wavelength Sensor Emitters," filed Feb. 25, 2013, now issued as U.S. Pat. No. 8,849,365, which is a continuation of U.S. patent application Ser. No. 12/422,915, entitled "Multiple Wavelength Sensor Emitters," filed Apr. 13, 2009, now issued as U.S. Pat. No. 8,385,996, which is a continuation of U.S. patent application Ser. No. 11/367,013, entitled "Multiple Wavelength Sensor Emitters," filed Mar. 1, 2006, now issued as U.S. Pat. No. 7,764,982, which claims priority benefit to U.S. Provisional Patent App. No. 60/657,596, filed Mar. 1, 2005, entitled "Multiple Wavelength Sensor," U.S. Provisional Patent App. No. 60/657,281, filed Mar. 1, 2005, entitled "Physiological Parameter Confidence Measure," U.S. Provisional Patent App. No. 60/657,268, filed Mar. 1, 2005, entitled "Configurable Physiological Measurement System," and U.S. Provisional Patent App. No. 60/657,759, filed Mar. 1, 2005, entitled "Noninvasive Multi-Parameter Patient Monitor." The present application incorporates each of the foregoing disclosures herein by reference in its entirety and for all purposes.

INCORPORATION BY REFERENCE OF RELATED APPLICATIONS

The present application is related to the following U.S. utility applications:

	App. Ser. No.	Filing Date	Title	Atty Dock.
1	11/367,013	Mar. 1, 2006	Multiple Wavelength Sensor Emitters	MLR.002A
	11/546,932	Oct. 12, 2006	Disposable Wavelength Optical Sensor	MLR.002CP1
2	11/366,995	Mar. 1, 2006	Multiple Wavelength Sensor Equalization	MLR.003A
3	11/366,209	Mar. 1, 2006	Multiple Wavelength Sensor Substrate	MLR.004A
4	11/366,210	Mar. 1, 2006	Multiple Wavelength Sensor Interconnect	MLR.005A
5	11/366,833	Mar. 1, 2006	Multiple Wavelength Sensor Attachment	MLR.006A
6	11/366,997	Mar. 1, 2006	Multiple Wavelength Sensor Drivers	MLR.009A
7	11/367,034	Mar. 1, 2006	Physiological Parameter Confidence Measure	MLR.010A
8	11/367,036	Mar. 1, 2006	Configurable Physiological Measurement System	MLR.011A
9	11/367,033	Mar. 1, 2006	Noninvasive Multi-Parameter Patient Monitor	MLR.012A
10	11/367,014	Mar. 1, 2006	Noninvasive Multi-Parameter Patient Monitor	MLR.013A
11	11/366,208	Mar. 1, 2006	Noninvasive Multi-Parameter Patient Monitor	MLR.014A
12	12/056,179	Mar. 26, 2008	Multiple Wavelength Optical Sensor	MLR.015A
13	12/082,810	Apr. 14, 2008	Optical Sensor Assembly	MLR.015A2

The present application incorporates the foregoing disclosures herein by reference.

BACKGROUND

Spectroscopy is a common technique for measuring the concentration of organic and some inorganic constituents of a solution. The theoretical basis of this technique is the Beer-Lambert law, which states that the concentration c_i of an absorbent in solution can be determined by the intensity of light transmitted through the solution, knowing the pathlength d_λ, the intensity of the incident light $I_{0,\lambda}$, and the extinction coefficient $\varepsilon_{i,\lambda}$ at a particular wavelength λ. In generalized form, the Beer-Lambert law is expressed as:

$$I_\lambda = I_{0,\lambda} e^{-d_\lambda \cdot \mu_{a,\lambda}} \tag{1}$$

$$\mu_{a,\lambda} = \sum_{i=1}^{n} \varepsilon_{i,\lambda} \cdot c_i \tag{2}$$

where, $\mu_{a,\lambda}$ is the bulk absorption coefficient and represents the probability of absorption per unit length. The minimum number of discrete wavelengths that are required to solve EQS. 1-2 are the number of significant absorbers that are present in the solution.

A practical application of this technique is pulse oximetry, which utilizes a noninvasive sensor to measure oxygen saturation (SpO_2) and pulse rate. In general, the sensor has light emitting diodes (LEDs) that transmit optical radiation of red and infrared wavelengths into a tissue site and a detector that responds to the intensity of the optical radiation after absorption (e.g., by transmission or transreflectance) by pulsatile arterial blood flowing within the tissue site. Based on this response, a processor determines measurements for SpO_2, pulse rate, and can output representative plethysmographic waveforms. Thus, "pulse oximetry" as used herein encompasses its broad ordinary meaning known to one of skill in the art, which includes at least those noninvasive

procedures for measuring parameters of circulating blood through spectroscopy. Moreover, "plethysmograph" as used herein (commonly referred to as "photoplethysmograph"), encompasses its broad ordinary meaning known to one of skill in the art, which includes at least data representative of a change in the absorption of particular wavelengths of light as a function of the changes in body tissue resulting from pulsing blood. Pulse oximeters capable of reading through motion induced noise are available from Masimo Corporation ("Masimo") of Irvine, Calif. Moreover, portable and other oximeters capable of reading through motion induced noise are disclosed in at least U.S. Pat. Nos. 6,770,028, 6,658,276, 6,157,850, 6,002,952 5,769,785, and 5,758,644, which are owned by Masimo and are incorporated by reference herein. Such reading through motion oximeters have gained rapid acceptance in a wide variety of medical applications, including surgical wards, intensive care and neonatal units, general wards, home care, physical training, and virtually all types of monitoring scenarios.

SUMMARY

There is a need to noninvasively measure multiple physiological parameters, other than, or in addition to, oxygen saturation and pulse rate. For example, hemoglobin species that are also significant under certain circumstances are carboxyhemoglobin and methemoglobin. Other blood parameters that may be measured to provide important clinical information are fractional oxygen saturation, total hemoglobin (Hbt), bilirubin and blood glucose, to name a few.

One aspect of a physiological sensor is light emitting sources, each activated by addressing at least one row and at least one column of an electrical grid. The light emitting sources transmit light having multiple wavelengths and a detector is responsive to the transmitted light after attenuation by body tissue.

Another aspect of a physiological sensor is light emitting sources capable of transmitting light having multiple wavelengths. Each of the light emitting sources includes a first contact and a second contact. The first contacts of a first set of the light emitting sources are in communication with a first conductor and the second contacts of a second set of the light emitting sources are in communication with a second conductor. A detector is capable of detecting the transmitted light attenuated by body tissue and outputting a signal indicative of at least one physiological parameter of the body tissue. At least one light emitting source of the first set and at least one light emitting source of the second set are not common to the first and second sets. Further, each of the first set and the second set comprises at least two of the light emitting sources.

A further aspect of a physiological sensor sequentially addresses light emitting sources using conductors of an electrical grid so as to emit light having multiple wavelengths that when attenuated by body tissue is indicative of at least one physiological characteristic. The emitted light is detected after attenuation by body tissue.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a perspective view of a physiological measurement system utilizing a multiple wavelength sensor;

FIGS. **2**A-C are perspective views of multiple wavelength sensor embodiments;

FIG. **3** is a general block diagram of a multiple wavelength sensor and sensor controller;

FIG. **4** is an exploded perspective view of a multiple wavelength sensor embodiment;

FIG. **5** is a general block diagram of an emitter assembly;

FIG. **6** is a perspective view of an emitter assembly embodiment;

FIG. **7** is a general block diagram of an emitter array;

FIG. **8** is a schematic diagram of an emitter array embodiment;

FIG. **9** is a general block diagram of equalization;

FIGS. **10**A-D are block diagrams of various equalization embodiments;

FIGS. **11**A-C are perspective views of an emitter assembly incorporating various equalization embodiments;

FIG. **12** is a general block diagram of an emitter substrate;

FIGS. **13-14** are top and detailed side views of an emitter substrate embodiment;

FIG. **15-16** are top and bottom component layout views of an emitter substrate embodiment;

FIG. **17** is a schematic diagram of an emitter substrate embodiment;

FIG. **18** is a plan view of an inner layer of an emitter substrate embodiment;

FIG. **19** is a general block diagram of an interconnect assembly in relationship to other sensor assemblies;

FIG. **20** is a block diagram of an interconnect assembly embodiment;

FIG. **21** is a partially-exploded perspective view of a flex circuit assembly embodiment of an interconnect assembly;

FIG. **22** is a top plan view of a flex circuit;

FIG. **23** is an exploded perspective view of an emitter portion of a flex circuit assembly;

FIG. **24** is an exploded perspective view of a detector assembly embodiment;

FIGS. **25-26** are block diagrams of adjacent detector and stacked detector embodiments;

FIG. **27** is a block diagram of a finger clip embodiment of an attachment assembly;

FIG. **28** is a general block diagram of a detector pad;

FIGS. **29**A-B are perspective views of detector pad embodiments;

FIGS. **30**A-H are perspective bottom, perspective top, bottom, back, top, side cross sectional, side, and front cross sectional views of an emitter pad embodiment;

FIGS. **31**A-H are perspective bottom, perspective top, top, back, bottom, side cross sectional, side, and front cross sectional views of a detector pad embodiment;

FIGS. **32**A-H are perspective bottom, perspective top, top, back, bottom, side cross sectional, side, and front cross sectional views of a shoe box;

FIGS. **33**A-H are perspective bottom, perspective top, top, back, bottom, side cross sectional, side, and front cross sectional views of a slim-finger emitter pad embodiment;

FIGS. **34**A-H are perspective bottom, perspective top, top, back, bottom, side cross sectional, side, and front cross sectional views of a slim-finger detector pad embodiment;

FIGS. **35**A-B are plan and cross sectional views, respectively, of a spring assembly embodiment;

FIGS. **36**A-C are top, perspective and side views of a finger clip spring;

FIGS. **37**A-D are top, back, bottom, and side views of a spring plate;

FIGS. **38**A-D are front cross sectional, bottom, front and side cross sectional views of an emitter-pad shell;

FIGS. **39**A-D are back, top, front and side cross sectional views of a detector-pad shell;

FIG. **40** is a general block diagram of a monitor and a sensor;

FIGS. **41**A-C are schematic diagrams of grid drive embodiments for a sensor having back-to-back diodes and an information element;

FIG. **42** is a schematic diagrams of a grid drive embodiment for an information element;

FIGS. **43**A-C are schematic diagrams for grid drive readable information elements;

FIGS. **44**A-B are cross sectional and side cut away views of a sensor cable;

FIG. **45** is a block diagram of a sensor controller embodiment; and

FIG. **46** is a detailed exploded perspective view of a multiple wavelength sensor embodiment.

DETAILED DESCRIPTION

Overview

In this application, reference is made to many blood parameters. Some references that have common shorthand designations are referenced through such shorthand designations. For example, as used herein, HbCO designates carboxyhemoglobin, HbMet designates methemoglobin, and Hbt designates total hemoglobin. Other shorthand designations such as COHb, MetHb, and tHb are also common in the art for these same constituents. These constituents are generally reported in terms of a percentage, often referred to as saturation, relative concentration or fractional saturation. Total hemoglobin is generally reported as a concentration in g/dL. The use of the particular shorthand designators presented in this application does not restrict the term to any particular manner in which the designated constituent is reported.

FIG. **1** illustrates a physiological measurement system **10** having a monitor **100** and a multiple wavelength sensor assembly **200** with enhanced measurement capabilities as compared with conventional pulse oximetry. The physiological measurement system **10** allows the monitoring of a person, including a patient. In particular, the multiple wavelength sensor assembly **200** allows the measurement of blood constituent and related parameters in addition to oxygen saturation and pulse rate. Alternatively, the multiple wavelength sensor assembly **200** allows the measurement of oxygen saturation and pulse rate with increased accuracy or robustness as compared with conventional pulse oximetry.

In one embodiment, the sensor assembly **200** is configured to plug into a monitor sensor port **110**. Monitor keys **160** provide control over operating modes and alarms, to name a few. A display **170** provides readouts of measured parameters, such as oxygen saturation, pulse rate, HbCO and HbMet to name a few.

FIG. **2**A illustrates a multiple wavelength sensor assembly **200** having a sensor **400** adapted to attach to a tissue site, a sensor cable **4400** and a monitor connector **210**. In one embodiment, the sensor **400** is incorporated into a reusable finger clip adapted to removably attach to, and transmit light through, a fingertip. The sensor cable **4400** and monitor connector **210** are integral to the sensor **400**, as shown. In alternative embodiments, the sensor **400** may be configured separately from the cable **4400** and connector **210**.

FIGS. **2**B-C illustrate alternative sensor embodiments, including a sensor **401** (FIG. **2**B) partially disposable and partially reusable (resposable) and utilizing an adhesive attachment mechanism. Also shown is a sensor **402** (FIG. **2**C) being disposable and utilizing an adhesive attachment mechanism. In other embodiments, a sensor may be configured to attach to various tissue sites other than a finger, such as a foot or an ear. Also a sensor may be configured as a reflectance or transflectance device that attaches to a forehead or other tissue surface.

FIG. **3** illustrates a sensor assembly **400** having an emitter assembly **500**, a detector assembly **2400**, an interconnect assembly **1900** and an attachment assembly **2700**. The emitter assembly **500** responds to drive signals received from a sensor controller **4500** in the monitor **100** via the cable **4400** so as to transmit optical radiation having a plurality of wavelengths into a tissue site. The detector assembly **2400** provides a sensor signal to the monitor **100** via the cable **4400** in response to optical radiation received after attenuation by the tissue site. The interconnect assembly **1900** provides electrical communication between the cable **4400** and both the emitter assembly **500** and the detector assembly **2400**. The attachment assembly **2700** attaches the emitter assembly **500** and detector assembly **2400** to a tissue site, as described above. The emitter assembly **500** is described in further detail with respect to FIG. **5**, below. The interconnect assembly **1900** is described in further detail with respect to FIG. **19**, below. The detector assembly **2400** is described in further detail with respect to FIG. **24**, below. The attachment assembly **2700** is described in further detail with respect to FIG. **27**, below.

FIG. **4** illustrates a sensor **400** embodiment that removably attaches to a fingertip. The sensor **400** houses a multiple wavelength emitter assembly **500** and corresponding detector assembly **2400**. A flex circuit assembly **1900** mounts the emitter and detector assemblies **500**, **2400** and interconnects them to a multi-wire sensor cable **4400**. Advantageously, the sensor **400** is configured in several respects for both wearer comfort and parameter measurement performance. The flex circuit assembly **1900** is configured to mechanically decouple the cable **4400** wires from the emitter and detector assemblies **500**, **2400** to reduce pad stiffness and wearer discomfort. The pads **3000**, **3100** are mechanically decoupled from shells **3800**, **3900** to increase flexibility and wearer comfort. A spring **3600** is configured in hinged shells **3800**, **3900** so that the pivot point of the finger clip is well behind the fingertip, improving finger attachment and more evenly distributing the clip pressure along the finger.

As shown in FIG. **4**, the detector pad **3100** is structured to properly position a fingertip in relationship to the detector assembly **2400**. The pads have flaps that block ambient light. The detector assembly **2400** is housed in an enclosure so as to reduce light piping from the emitter assembly to the detector assembly without passing through fingertip tissue. These and other features are described in detail below. Specifically, emitter assembly embodiments are described with respect to FIGS. **5-18**. Interconnect assembly embodiments, including the flexible circuit assembly **1900**, are described with respect to FIGS. **19-23**. Detector assembly embodiments are described with respect to FIGS. **24-26**. Attachment assembly embodiments are described with respect to FIGS. **27-39**.

Emitter Assembly

FIG. **5** illustrates an emitter assembly **500** having an emitter array **700**, a substrate **1200** and equalization **900**. The emitter array **700** has multiple light emitting sources, each activated by addressing at least one row and at least one column of an electrical grid. The light emitting sources are capable of transmitting optical radiation having multiple wavelengths. The equalization **900** accounts for differences in tissue attenuation of the optical radiation across the multiple wavelengths so as to at least reduce wavelength-dependent variations in detected intensity. The substrate **1200** provides a physical mount for the emitter array and

emitter-related equalization and a connection between the emitter array and the interconnection assembly. Advantageously, the substrate **1200** also provides a bulk temperature measurement so as to calculate the operating wavelengths for the light emitting sources. The emitter array **700** is described in further detail with respect to FIG. **7**, below. Equalization is described in further detail with respect to FIG. **9**, below. The substrate **1200** is described in further detail with respect to FIG. **12**, below.

FIG. **6** illustrates an emitter assembly **500** embodiment having an emitter array **700**, an encapsulant **600**, an optical filter **1100** and a substrate **1200**. Various aspects of the emitter assembly **500** are described with respect to FIGS. **7-18**, below. The emitter array **700** emits optical radiation having multiple wavelengths of predetermined nominal values, advantageously allowing multiple parameter measurements. In particular, the emitter array **700** has multiple light emitting diodes (LEDs) **710** that are physically arranged and electrically connected in an electrical grid to facilitate drive control, equalization, and minimization of optical pathlength differences at particular wavelengths. The optical filter **1100** is advantageously configured to provide intensity equalization across a specific LED subset. The substrate **1200** is configured to provide a bulk temperature of the emitter array **700** so as to better determine LED operating wavelengths.

Emitter Array

FIG. **7** illustrates an emitter array **700** having multiple light emitters (LE) **710** capable of emitting light **702** having multiple wavelengths into a tissue site **1**. Row drivers **4530** and column drivers **4560** are electrically connected to the light emitters **710** and activate one or more light emitters **710** by addressing at least one row **720** and at least one column **740** of an electrical grid. In one embodiment, the light emitters **710** each include a first contact **712** and a second contact **714**. The first contact **712** of a first subset **730** of light emitters is in communication with a first conductor **720** of the electrical grid. The second contact **714** of a second subset **750** of light emitters is in communication with a second conductor **740**. Each subset comprises at least two light emitters, and at least one of the light emitters of the first and second subsets **730**, **750** are not in common. A detector **2400** is capable of detecting the emitted light **702** and outputting a sensor signal **2500** responsive to the emitted light **702** after attenuation by the tissue site **1**. As such, the sensor signal **2500** is indicative of at least one physiological parameter corresponding to the tissue site **1**, as described above.

FIG. **8** illustrates an emitter array **700** having LEDs **801** connected within an electrical grid of n rows and m columns totaling n+m drive lines **4501**, **4502**, where n and m integers greater than one. The electrical grid advantageously minimizes the number of drive lines required to activate the LEDs **801** while preserving flexibility to selectively activate individual LEDs **801** in any sequence and multiple LEDs **801** simultaneously. The electrical grid also facilitates setting LED currents so as to control intensity at each wavelength, determining operating wavelengths and monitoring total grid current so as to limit power dissipation. The emitter array **700** is also physically configured in rows **810**. This physical organization facilitates clustering LEDs **801** according to wavelength so as to minimize pathlength variations and facilitates equalization of LED intensities.

As shown in FIG. **8**, one embodiment of an emitter array **700** comprises up to sixteen LEDs **801** configured in an electrical grid of four rows **810** and four columns **820**. Each of the four row drive lines **4501** provide a common anode connection to four LEDs **801**, and each of the four column drive lines **4502** provide a common cathode connection to four LEDs **801**. Thus, the sixteen LEDs **801** are advantageously driven with only eight wires, including four anode drive lines **812** and four cathode drive lines **822**. This compares favorably to conventional common anode or cathode LED configurations, which require more drive lines. In a particular embodiment, the emitter array **700** is partially populated with eight LEDs having nominal wavelengths as shown in TABLE 1. Further, LEDs having wavelengths in the range of 610-630 nm are grouped together in the same row. The emitter array **700** is adapted to a physiological measurement system **10** (FIG. **1**) for measuring HbCO and/or METHb in addition to S_pO_2 and pulse rate.

TABLE 1

Nominal LED Wavelengths

LED	λ	Row	Col
D1	630	1	1
D2	620	1	2
D3	610	1	3
D4		1	4
D5	700	2	1
D6	730	2	2
D7	660	2	3
D8	805	2	4
D9		3	1
D10		3	2
D11		3	3
D12	905	3	4
D13		4	1
D14		4	2
D15		4	3
D16		4	4

Also shown in FIG. **8**, row drivers **4530** and column drivers **4560** located in the monitor **100** selectively activate the LEDs **801**. In particular, row and column drivers **4530**, **4560** function together as switches to Vcc and current sinks, respectively, to activate LEDs and as switches to ground and Vcc, respectively, to deactivate LEDs. This push-pull drive configuration advantageously prevents parasitic current flow in deactivated LEDs. In a particular embodiment, only one row drive line **4501** is switched to Vcc at a time. One to four column drive lines **4502**, however, can be simultaneously switched to a current sink so as to simultaneously activate multiple LEDs within a particular row. Activation of two or more LEDs of the same wavelength facilitates intensity equalization, as described with respect to FIGS. **9-11**, below. LED drivers are described in further detail with respect to FIG. **45**, below.

Although an emitter assembly is described above with respect to an array of light emitters each configured to transmit optical radiation centered around a nominal wavelength, in another embodiment, an emitter assembly advantageously utilizes one or more tunable broadband light sources, including the use of filters to select the wavelength, so as to minimize wavelength-dependent pathlength differences from emitter to detector. In yet another emitter assembly embodiment, optical radiation from multiple emitters each configured to transmit optical radiation centered around a nominal wavelength is funneled to a tissue site point so as to minimize wavelength-dependent pathlength differences. This funneling may be accomplish with fiberoptics or mirrors, for example. In further embodiments, the LEDs **801** can be configured with alternative orientations with correspondingly different drivers among various other configurations of LEDs, drivers and interconnecting conductors.

Equalization

FIG. **9** illustrate a physiological parameter measurement system **10** having a controller **4500**, an emitter assembly **500**, a detector assembly **2400** and a front-end **4030**. The emitter assembly **500** is configured to transmit optical radiation having multiple wavelengths into the tissue site **1**. The detector assembly **2400** is configured to generate a sensor signal **2500** responsive to the optical radiation after tissue attenuation. The front-end **4030** conditions the sensor signal **2500** prior to analog-to-digital conversion (ADC).

FIG. **9** also generally illustrates equalization **900** in a physiological measurement system **10** operating on a tissue site **1**. Equalization encompasses features incorporated into the system **10** in order to provide a sensor signal **2500** that falls well within the dynamic range of the ADC across the entire spectrum of emitter wavelengths. In particular, equalization compensates for the imbalance in tissue light absorption due to Hb and HbO_2 **910**. Specifically, these blood constituents attenuate red wavelengths greater than IR wavelengths. Ideally, equalization **900** balances this unequal attenuation. Equalization **900** can be introduced anywhere in the system **10** from the controller **4500** to front-end **4000** and can include compensatory attenuation versus wavelength, as shown, or compensatory amplification versus or both.

Equalization can be achieved to a limited extent by adjusting drive currents from the controller **4500** and front-end **4030** amplification accordingly to wavelength so as to compensate for tissue absorption characteristics. Signal demodulation constraints, however, limit the magnitude of these adjustments. Advantageously, equalization **900** is also provided along the optical path from emitters **500** to detector **2400**. Equalization embodiments are described in further detail with respect to FIGS. **10-11**, below.

FIGS. **10**A-D illustrate various equalization embodiments having an emitter array **700** adapted to transmit optical radiation into a tissue site **1** and a detector assembly **2400** adapted to generate a sensor signal **2500** responsive to the optical radiation after tissue attenuation. FIG. **10**A illustrates an optical filter **1100** that attenuates at least a portion of the optical radiation before it is transmitted into a tissue site **1**. In particular, the optical filter **1100** attenuates at least a portion of the IR wavelength spectrum of the optical radiation so as to approximate an equalization curve **900** (FIG. **9**). FIG. **10**B illustrates an optical filter **1100** that attenuates at least a portion of the optical radiation after it is attenuated by a tissue site **1**, where the optical filter **1100** approximates an equalization curve **900** (FIG. **9**).

FIG. **10**C illustrates an emitter array **700** where at least a portion of the emitter array generates one or more wavelengths from multiple light emitters **710** of the same wavelength. In particular, the same-wavelength light emitters **710** boost at least a portion of the red wavelength spectrum so as to approximately equalize the attenuation curves **910** (FIG. **9**). FIG. **10**D illustrates a detector assembly **2400** having multiple detectors **2610**, **2620** selected so as to equalize the attenuation curves **910** (FIG. **9**). To a limited extent, optical equalization can also be achieved by selection of particular emitter array **700** and detector **2400** components, e.g. LEDs having higher output intensities or detectors having higher sensitivities at red wavelengths. Although equalization embodiments are described above with respect to red and IR wavelengths, these equalization embodiments can be applied to equalize tissue characteristics across any portion of the optical spectrum.

FIGS. **11**A-C illustrates an optical filter **1100** for an emitter assembly **500** that advantageously provides optical equalization, as described above. LEDs within the emitter array **700** may be grouped according to output intensity or wavelength or both. Such a grouping facilitates equalization of LED intensity across the array. In particular, relatively low tissue absorption and/or relatively high output intensity LEDs can be grouped together under a relatively high attenuation optical filter. Likewise, relatively low tissue absorption and/or relatively low output intensity LEDs can be grouped together without an optical filter or under a relatively low or negligible attenuation optical filter. Further, high tissue absorption and/or low intensity LEDs can be grouped within the same row with one or more LEDs of the same wavelength being simultaneously activated, as described with respect to FIG. **10**C, above. In general, there can be any number of LED groups and any number of LEDs within a group. There can also be any number of optical filters corresponding to the groups having a range of attenuation, including no optical filter and/or a “clear” filter having negligible attenuation.

As shown in FIGS. **11**A-C, a filtering media may be advantageously added to an encapsulant that functions both as a cover to protect LEDs and bonding wires and as an optical filter **1100**. In one embodiment, a filtering media **1100** encapsulates a select group of LEDs and a clear media **600** (FIG. **6**) encapsulates the entire array **700** and the filtering media **1000** (FIG. **6**). In a particular embodiment, corresponding to TABLE 1, above, five LEDs nominally emitting at 660-905 nm are encapsulated with both a filtering media **1100** and an overlying clear media **600** (FIG. **6**), i.e. attenuated. In a particular embodiment, the filtering media **1100** is a 40:1 mixture of a clear encapsulant (EPO-TEK OG147-7) and an opaque encapsulate (EPO-TEK OG147) both available from Epoxy Technology, Inc., Billerica, Mass. Three LEDs nominally emitting at 610-630 nm are only encapsulated with the clear media **600** (FIG. **6**), i.e. unattenuated. In alternative embodiments, individual LEDs may be singly or multiply encapsulated according to tissue absorption and/or output intensity. In other alternative embodiments, filtering media may be separately attachable optical filters or a combination of encapsulants and separately attachable optical filters. In a particular embodiment, the emitter assembly **500** has one or more notches along each side proximate the component end **1305** (FIG. **13**) for retaining one or more clip-on optical filters.

Substrate

FIG. **12** illustrates light emitters **710** configured to transmit optical radiation **1201** having multiple wavelengths in response to corresponding drive currents **1210**. A thermal mass **1220** is disposed proximate the emitters **710** so as to stabilize a bulk temperature **1202** for the emitters. A temperature sensor **1230** is thermally coupled to the thermal mass **1220**, wherein the temperature sensor **1230** provides a temperature sensor output **1232** responsive to the bulk temperature **1202** so that the wavelengths are determinable as a function of the drive currents **1210** and the bulk temperature **1202**.

In one embodiment, an operating wavelength Aa of each light emitter **710** is determined according to EQ. 3

$$\lambda_a = f(T_b, I_{drive}, \Sigma I_{drive}) \tag{3}$$

where T_b is the bulk temperature, I_{drive} is the drive current for a particular light emitter, as determined by the sensor controller **4500** (FIG. **45**), described below, and ΣI_{drive} is the total drive current for all light emitters. In another embodiment, temperature sensors are configured to measure the temperature of each light emitter **710** and an operating wavelength λ_a of each light emitter **710** is determined according to EQ. 4

$$\lambda_a = f(T_a, I_{drive}, \Sigma I_{drive}) \tag{4}$$

where T_a is the temperature of a particular light emitter, I_{drive} is the drive current for that light emitter and ΣI_{drive} is the total drive current for all light emitters.

In yet another embodiment, an operating wavelength for each light emitter is determined by measuring the junction voltage for each light emitter **710**. In a further embodiment, the temperature of each light emitter **710** is controlled, such as by one or more Peltier cells coupled to each light emitter **710**, and an operating wavelength for each light emitter **710** is determined as a function of the resulting controlled temperature or temperatures. In other embodiments, the operating wavelength for each light emitter **710** is determined directly, for example by attaching a charge coupled device (CCD) to each light emitter or by attaching a fiberoptic to each light emitter and coupling the fiberoptics to a wavelength measuring device, to name a few.

FIGS. **13-18** illustrate one embodiment of a substrate **1200** configured to provide thermal conductivity between an emitter array **700** (FIG. **8**) and a thermistor **1540** (FIG. **16**). In this manner, the resistance of the thermistor **1540** (FIG. **16**) can be measured in order to determine the bulk temperature of LEDs **801** (FIG. **8**) mounted on the substrate **1200**. The substrate **1200** is also configured with a relatively significant thermal mass, which stabilizes and normalizes the bulk temperature so that the thermistor measurement of bulk temperature is meaningful.

FIGS. **13-14** illustrate a substrate **1200** having a component side **1301**, a solder side **1302**, a component end **1305** and a connector end **1306**. Alignment notches **1310** are disposed between the ends **1305**, **1306**. The substrate **1200** further has a component layer **1401**, inner layers **1402-1405** and a solder layer **1406**. The inner layers **1402-1405**, e.g. inner layer **1402** (FIG. **18**), have substantial metallized areas **1411** that provide a thermal mass **1220** (FIG. **12**) to stabilize a bulk temperature for the emitter array **700** (FIG. **12**). The metallized areas **1411** also function to interconnect component pads **1510** and wire bond pads **1520** (FIG. **15**) to the connector **1530**.

FIGS. **15-16** illustrate a substrate **1200** having component pads **1510** and wire bond pads **1520** at a component end **1305**. The component pads **1510** mount and electrically connect a first side (anode or cathode) of the LEDs **801** (FIG. **8**) to the substrate **1200**. Wire bond pads **1520** electrically connect a second side (cathode or anode) of the LEDs **801** (FIG. **8**) to the substrate **1200**. The connector end **1306** has a connector **1530** with connector pads **1532**, **1534** that mount and electrically connect the emitter assembly **500** (FIG. **23**), including the substrate **1200**, to the flex circuit **2200** (FIG. **22**). Substrate layers **1401-1406** (FIG. **14**) have traces that electrically connect the component pads **1510** and wire bond pads **1520** to the connector **1532-1534**. A thermistor **1540** is mounted to thermistor pads **1550** at the component end **1305**, which are also electrically connected with traces to the connector **1530**. Plated thru holes electrically connect the connector pads **1532**, **1534** on the component and solder sides **1301**, **1302**, respectively.

FIG. **17** illustrates the electrical layout of a substrate **1200**. A portion of the LEDs **801**, including D**1**-D**4** and D**13**-D**16** have cathodes physically and electrically connected to component pads **1510** (FIG. **15**) and corresponding anodes wire bonded to wire bond pads **1520**. Another portion of the LEDs **801**, including D**5**-D**8** and D**9**-D**12**, have anodes physically and electrically connected to component pads **1510** (FIG. **15**) and corresponding cathodes wire bonded to wire bond pads **1520**. The connector **1530** has row pinouts J**21**-J**24**, column pinouts J**31**-J**34** and thermistor pinouts J**40**-J**41** for the LEDs **801** and thermistor **1540**.

Interconnect Assembly

FIG. **19** illustrates an interconnect assembly **1900** that mounts the emitter assembly **500** and detector assembly **2400**, connects to the sensor cable **4400** and provides electrical communications between the cable and each of the emitter assembly **500** and detector assembly **2400**. In one embodiment, the interconnect assembly **1900** is incorporated with the attachment assembly **2700**, which holds the emitter and detector assemblies to a tissue site. An interconnect assembly embodiment utilizing a flexible (flex) circuit is described with respect to FIGS. **20-24**, below.

FIG. **20** illustrates an interconnect assembly **1900** embodiment having a circuit substrate **2200**, an emitter mount **2210**, a detector mount **2220** and a cable connector **2230**. The emitter mount **2210**, detector mount **2220** and cable connector **2230** are disposed on the circuit substrate **2200**. The emitter mount **2210** is adapted to mount an emitter assembly **500** having multiple emitters. The detector mount **2220** is adapted to mount a detector assembly **2400** having a detector. The cable connector **2230** is adapted to attach a sensor cable **4400**. A first plurality of conductors **2040** disposed on the circuit substrate **2200** electrically interconnects the emitter mount **2210** and the cable connector **2230**. A second plurality of conductors **2050** disposed on the circuit substrate **2200** electrically interconnects the detector mount **2220** and the cable connector **2230**. A decoupling **2060** disposed proximate the cable connector **2230** substantially mechanically isolates the cable connector **2230** from both the emitter mount **2210** and the detector mount **2220** so that sensor cable stiffness is not translated to the emitter assembly **500** or the detector assembly **2400**. A shield **2070** is adapted to fold over and shield one or more wires or pairs of wires of the sensor cable **4400**.

FIG. **21** illustrates a flex circuit assembly **1900** having a flex circuit **2200**, an emitter assembly **500** and a detector assembly **2400**, which is configured to terminate the sensor end of a sensor cable **4400**. The flex circuit assembly **1900** advantageously provides a structure that electrically connects yet mechanically isolates the sensor cable **4400**, the emitter assembly **500** and the detector assembly **2400**. As a result, the mechanical stiffness of the sensor cable **4400** is not translated to the sensor pads **3000**, **3100** (FIGS. **30-31**), allowing a comfortable finger attachment for the sensor **200** (FIG. **1**). In particular, the emitter assembly **500** and detector assembly **2400** are mounted to opposite ends **2201**, **2202** (FIG. **22**) of an elongated flex circuit **2200**. The sensor cable **4400** is mounted to a cable connector **2230** extending from a middle portion of the flex circuit **2200**. Detector wires **4470** are shielded at the flex circuit junction by a fold-over conductive ink flap **2240**, which is connected to a cable inner shield **4450**. The flex circuit **2200** is described in further detail with respect to FIG. **22**. The emitter portion of the flex circuit assembly **1900** is described in further detail with respect to FIG. **23**. The detector assembly **2400** is described with respect to FIG. **24**. The sensor cable **4400** is described with respect to FIGS. **44**A-B, below.

FIG. **22** illustrates a sensor flex circuit **2200** having an emitter end **2201**, a detector end **2202**, an elongated interconnect **2204**, **2206** between the ends **2201**, **2202** and a cable connector **2230** extending from the interconnect **2204**, **2206**. The emitter end **2201** forms a "head" having emitter solder pads **2210** for attaching the emitter assembly **500** (FIG. **6**) and mounting ears **2214** for attaching to the emitter pad **3000** (FIG. **30**B), as described below. The detector end **2202** has detector solder pads for attaching the detector **2410** (FIG.

24). The interconnect **2204** between the emitter end **2201** and the cable connector **2230** forms a "neck," and the interconnect **2206** between the detector end **2202** and the cable connector **2230** forms a "tail." The cable connector **2230** forms "wings" that extend from the interconnect **2204**, **2206** between the neck **2204** and tail **2206**. A conductive ink flap **2240** connects to the cable inner shield **4450** (FIGS. **44**A-B) and folds over to shield the detector wires **4470** (FIGS. **44**A-B) soldered to the detector wire pads **2236**. The outer wire pads **2238** connect to the remaining cable wires **4430** (FIGS. **44**A-B). The flex circuit **2200** has top coverlay, top ink, inner coverlay, trace, trace base, bottom ink and bottom coverlay layers.

The flex circuit **2200** advantageously provides a connection between a multiple wire sensor cable **4400** (FIGS. **44**A-B), a multiple wavelength emitter assembly **500** (FIG. **6**) and a detector assembly **2400** (FIG. **24**) without rendering the emitter and detector assemblies unwieldy and stiff. In particular, the wings **2230** provide a relatively large solder pad area **2232** that is narrowed at the neck **2204** and tail **2206** to mechanically isolate the cable **4400** (FIGS. **44**A-B) from the remainder of the flex circuit **2200**. Further, the neck **2206** is folded (see FIG. **4**) for installation in the emitter pad **3000** (FIGS. **30**A-H) and acts as a flexible spring to further mechanically isolate the cable **4400** (FIGS. **44**A-B) from the emitter assembly **500** (FIG. **4**). The tail **2206** provides an integrated connectivity path between the detector assembly **2400** (FIG. **24**) mounted in the detector pad **3100** (FIGS. **31**A-H) and the cable connector **2230** mounted in the opposite emitter pad **3000** (FIGS. **30**A-H).

FIG. **23** illustrates the emitter portion of the flex circuit assembly **1900** (FIG. **21**) having the emitter assembly **500**. The emitter assembly connector **1530** is attached to the emitter end **2210** of the flex circuit **2200** (FIG. **22**). In particular, reflow solder **2330** connects thru hole pads **1532**, **1534** of the emitter assembly **500** to corresponding emitter pads **2310** of the flex circuit **2200** (FIG. **22**).

FIG. **24** illustrates a detector assembly **2400** including a detector **2410**, solder pads **2420**, copper mesh tape **2430**, an EMI shield **2440** and foil **2450**. The detector **2410** is soldered **2460** chip side down to detector solder pads **2420** of the flex circuit **2200**. The detector solder joint and detector ground pads **2420** are wrapped with the Kapton tape **2470**. EMI shield tabs **2442** are folded onto the detector pads **2420** and soldered. The EMI shield walls are folded around the detector **2410** and the remaining tabs **2442** are soldered to the back of the EMI shield **2440**. The copper mesh tape **2430** is cut to size and the shielded detector and flex circuit solder joint are wrapped with the copper mesh tape **2430**. The foil **2450** is cut to size with a predetermined aperture **2452**. The foil **2450** is wrapped around shielded detector with the foil side in and the aperture **2452** is aligned with the EMI shield grid **2444**.

Detector Assembly

FIG. **25** illustrates an alternative detector assembly **2400** embodiment having adjacent detectors. Optical radiation having multiple wavelengths generated by emitters **700** is transmitted into a tissue site **1**. Optical radiation at a first set of wavelengths is detected by a first detector **2510**, such as, for example, a Si detector. Optical radiation at a second set of wavelengths is detected by a second detector **2520**, such as, for example, a GaAs detector.

FIG. **26** illustrates another alternative detector assembly **2400** embodiment having stacked detectors coaxial along a light path. Optical radiation having multiple wavelengths generated by emitters **700** is transmitted into a tissue site **1**. Optical radiation at a first set of wavelengths is detected by a first detector **2610**. Optical radiation at a second set of wavelengths passes through the first detector **2610** and is detected by a second detector **2620**. In a particular embodiment, a silicon (Si) detector and a gallium arsenide (GaAs) detector are used. The Si detector is placed on top of the GaAs detector so that light must pass through the Si detector before reaching the GaAs detector. The Si detector can be placed directly on top of the GaAs detector or the Si and GaAs detector can be separated by some other medium, such as a transparent medium or air. In another particular embodiment, a germanium detector is used instead of the GaAs detector. Advantageously, the stacked detector arrangement minimizes error caused by pathlength differences as compared with the adjacent detector embodiment.

Finger Clip

FIG. **27** illustrates a finger clip embodiment **2700** of a physiological sensor attachment assembly. The finger clip **2700** is configured to removably attach an emitter assembly **500** (FIG. **6**) and detector assembly **2400** (FIG. **24**), interconnected by a flex circuit assembly **1900**, to a fingertip. The finger clip **2700** has an emitter shell **3800**, an emitter pad **3000**, a detector pad **2800** and a detector shell **3900**. The emitter shell **3800** and the detector shell **3900** are rotatably connected and urged together by the spring assembly **3500**. The emitter pad **3000** is fixedly retained by the emitter shell. The emitter assembly **500** (FIG. **6**) is mounted proximate the emitter pad **3000** and adapted to transmit optical radiation having a plurality of wavelengths into fingertip tissue. The detector pad **2800** is fixedly retained by the detector shell **3900**. The detector assembly **3500** is mounted proximate the detector pad **2800** and adapted to receive the optical radiation after attenuation by fingertip tissue.

FIG. **28** illustrates a detector pad **2800** advantageously configured to position and comfortably maintain a fingertip relative to a detector assembly for accurate sensor measurements. In particular, the detector pad has fingertip positioning features including a guide **2810**, a contour **2820** and a stop **2830**. The guide **2810** is raised from the pad surface **2803** and narrows as the guide **2810** extends from a first end **2801** to a second end **2802** so as to increasingly conform to a fingertip as a fingertip is inserted along the pad surface **2803** from the first end **2801**. The contour **2820** has an indentation defined along the pad surface **2803** generally shaped to conform to a fingertip positioned over a detector aperture **2840** located within the contour **2820**. The stop **2830** is raised from the pad surface **2803** so as to block the end of a finger from inserting beyond the second end **2802**. FIGS. **29**A-B illustrate detector pad embodiments **3100**, **3400** each having a guide **2810**, a contour **2820** and a stop **2830**, described in further detail with respect to FIGS. **31** and **34**, respectively.

FIGS. **30**A-H illustrate an emitter pad **3000** having emitter pad flaps **3010**, an emitter window **3020**, mounting pins **3030**, an emitter assembly cavity **3040**, isolation notches **3050**, a flex circuit notch **3070** and a cable notch **3080**. The emitter pad flaps **3010** overlap with detector pad flaps **3110** (FIGS. **31**A-H) to block ambient light. The emitter window **3020** provides an optical path from the emitter array **700** (FIG. **8**) to a tissue site. The mounting pins **3030** accommodate apertures in the flex circuit mounting ears **2214** (FIG. **22**), and the cavity **3040** accommodates the emitter assembly **500** (FIG. **21**). Isolation notches **3050** mechanically decouple the shell attachment **3060** from the remainder of the emitter pad **3000**. The flex circuit notch **3070** accommodates the flex circuit tail **2206** (FIG. **22**) routed to the detector pad **3100** (FIGS. **31**A-H). The cable notch **3080**

accommodates the sensor cable **4400** (FIGS. **44**A-B). FIGS. **33**A-H illustrate an alternative slim finger emitter pad **3300** embodiment.

FIGS. **31**A-H illustrate a detector pad **3100** having detector pad flaps **3110**, a shoe box cavity **3120** and isolation notches **3150**. The detector pad flaps **3110** overlap with emitter pad flaps **3010** (FIGS. **30**A-H), interleaving to block ambient light. The shoe box cavity **3120** accommodates a shoe box **3200** (FIG. **32**A-H) described below. Isolation notches **3150** mechanically decouple the attachment points **3160** from the remainder of the detector pad **3100**. FIGS. **34**A-H illustrate an alternative slim finger detector pad **3400** embodiment.

FIGS. **32**A-H illustrate a shoe box **3200** that accommodates the detector assembly **2400** (FIG. **24**). A detector window **3210** provides an optical path from a tissue site to the detector **2410** (FIG. **24**). A flex circuit notch **3220** accommodates the flex circuit tail **2206** (FIG. **22**) routed from the emitter pad **3000** (FIGS. **30**A-H). In one embodiment, the shoe box **3200** is colored black or other substantially light absorbing color and the emitter pad **3000** and detector pad **3100** are each colored white or other substantially light reflecting color.

FIGS. **35-37** illustrate a spring assembly **3500** having a spring **3600** configured to urge together an emitter shell **3800** (FIG. **46**) and a detector shell **3900**. The detector shell is rotatably connected to the emitter shell. The spring is disposed between the shells **3800**, **3900** and adapted to create a pivot point along a finger gripped between the shells that is substantially behind the fingertip. This advantageously allows the shell hinge **3810**, **3910** (FIGS. **38-39**) to expand so as to distribute finger clip force along the inserted finger, comfortably keeping the fingertip in position over the detector without excessive force.

As shown in FIGS. **36**A-C, the spring **3600** has coils **3610**, an emitter shell leg **3620** and a detector shell leg **3630**. The emitter shell leg **3620** presses against the emitter shell **3800** (FIGS. **38**A-D) proximate a grip **3820** (FIGS. **38**A-D). The detector shell legs **3630** extend along the detector shell **3900** (FIGS. **39**A-D) to a spring plate **3700** (FIGS. **37**A-D) attachment point. The coil **3610** is secured by hinge pins **410** (FIG. **46**) and is configured to wind as the finger clip is opened, reducing its diameter and stress accordingly.

As shown in FIGS. **37**A-D the spring plate **3700** has attachment apertures **3710**, spring leg slots **3720**, and a shelf **3730**. The attachment apertures **3710** accept corresponding shell posts **3930** (FIGS. **39**A-D) so as to secure the spring plate **3700** to the detector shell **3900** (FIG. **39**A-D). Spring legs **3630** (FIG. **36**A-C) are slidably anchored to the detector shell **3900** (FIG. **39**A-D) by the shelf **3730**, advantageously allowing the combination of spring **3600**, shells **3800**, **3900** and hinges **3810**, **3910** to adjust to various finger sizes and shapes.

FIGS. **38-39** illustrate the emitter and detector shells **3800**, **3900**, respectively, having hinges **3810**, **3910** and grips **3820**, **3920**. Hinge apertures **3812**, **3912** accept hinge pins **410** (FIG. **46**) so as to create a finger clip. The detector shell hinge aperture **3912** is elongated, allowing the hinge to expand to accommodate a finger.

Monitor And Sensor

FIG. **40** illustrates a monitor **100** and a corresponding sensor assembly **200**, as described generally with respect to FIGS. **1-3**, above. The sensor assembly **200** has a sensor **400** and a sensor cable **4400**. The sensor **400** houses an emitter assembly **500** having emitters responsive to drivers within a sensor controller **4500** so as to transmit optical radiation into a tissue site. The sensor **400** also houses a detector assembly **2400** that provides a sensor signal **2500** responsive to the optical radiation after tissue attenuation. The sensor signal **2500** is filtered, amplified, sampled and digitized by the front-end **4030** and input to a DSP (digital signal processor) **4040**, which also commands the sensor controller **4500**. The sensor cable **4400** electrically communicates drive signals from the sensor controller **4500** to the emitter assembly **500** and a sensor signal **2500** from the detector assembly **2400** to the front-end **4030**. The sensor cable **4400** has a monitor connector **210** that plugs into a monitor sensor port **110**.

In one embodiment, the monitor **100** also has a reader **4020** capable of obtaining information from an information element (IE) in the sensor assembly **200** and transferring that information to the DSP **4040**, to another processor or component within the monitor **100**, or to an external component or device that is at least temporarily in communication with the monitor **100**. In an alternative embodiment, the reader function is incorporated within the DSP **4040**, utilizing one or more of DSP I/O, ADC, DAC features and corresponding processing routines, as examples.

In one embodiment, the monitor connector **210** houses the information element **4000**, which may be a memory device or other active or passive electrical component. In a particular embodiment, the information element **4000** is an EPROM, or other programmable memory, or an EEPROM, or other reprogrammable memory, or both. In an alternative embodiment, the information element **4000** is housed within the sensor **400**, or an information element **4000** is housed within both the monitor connector **4000** and the sensor **400**. In yet another embodiment, the emitter assembly **500** has an information element **4000**, which is read in response to one or more drive signals from the sensor controller **4500**, as described with respect to FIGS. **41-43**, below. In a further embodiment, a memory information element is incorporated into the emitter array **700** (FIG. **8**) and has characterization information relating to the LEDs **801** (FIG. **8**). In one advantageous embodiment, trend data relating to slowly varying parameters, such as perfusion index, HbCO or METHb, to name a few, are stored in an IE memory device, such as EEPROM.

Back-to-Back LEDs

FIGS. **41-43** illustrate alternative sensor embodiments. A sensor controller **4500** configured to activate an emitter array **700** (FIG. **7**) arranged in an electrical grid, is described with respect to FIG. **7**, above. Advantageously, a sensor controller **4500** so configured is also capable of driving a conventional two-wavelength (red and IR) sensor **4100** having back-to-back LEDs **4110**, **4120** or an information element **4300** or both.

FIG. **41**A illustrates a sensor **4100** having an electrical grid **4130** configured to activate light emitting sources by addressing at least one row conductor and at least one column conductor. A first LED **4110** and a second LED **4120** are configured in a back-to-back arrangement so that a first contact **4152** is connected to a first LED **4110** cathode and a second LED **4120** anode and a second contact **4154** is connected to a first LED **4110** anode and a second LED **4120** cathode. The first contact **4152** is in communications with a first row conductor **4132** and a first column conductor **4134**. The second contact is in communications with a second row conductor **4136** and a second column conductor **4138**. The first LED **4110** is activated by addressing the first row conductor **4132** and the second column conductor **4138**. The second LED **4120** is activated by addressing the second row conductor **4136** and the first column conductor **4134**.

FIG. **41**B illustrates a sensor cable **4400** embodiment capable of communicating signals between a monitor **100**

and a sensor **4100**. The cable **4400** has a first row input **4132**, a first column input **4134**, a second row input **4136** and a second column input **4138**. A first output **4152** combines the first row input **4132** and the first column input **4134**. A second output **4154** combines a second row input **4136** and second column input **4138**.

FIG. **41**C illustrates a monitor **100** capable of communicating drive signals to a sensor **4100**. The monitor **4400** has a first row signal **4132**, a first column signal **4134**, a second row signal **4136** and a second column signal **4138**. A first output signal **4152** combines the first row signal **4132** and the first column signal **4134**. A second output signal **4154** combines a second row signal **4136** and second column signal **4138**.

Information Elements

FIGS. **42-43** illustrate information element **4200-4300** embodiments in communications with emitter array drivers configured to activate light emitters connected in an electrical grid. The information elements are configured to provide information as DC values, AC values or a combination of DC and AC values in response corresponding DC, AC or combination DC and AC electrical grid drive signals. FIG. **42** illustrates information element embodiment **4200** advantageously driven directly by an electrical grid having rows **710** and columns **720**. In particular, the information element **4200** has a series connected resistor R_2 **4210** and diode **4220** connected between a row line **710** and a column line **720** of an electrical grid. In this manner, the resistor R_2 value can be read in a similar manner that LEDs **810** (FIG. **8**) are activated. The diode **4220** is oriented, e.g. anode to row and cathode to column as the LEDs so as to prevent parasitic currents from unwanted activation of LEDs **810** (FIG. **8**).

FIGS. **43**A-C illustrate other embodiments where the value of R_1 is read with a DC grid drive current and a corresponding grid output voltage level. In other particular embodiments, the combined values of R_1, R_2 and C or, alternatively, R_1, R_2 and L are read with a varying (AC) grid drive currents and a corresponding grid output voltage waveform. As one example, a step in grid drive current is used to determine component values from the time constant of a corresponding rise in grid voltage. As another example, a sinusoidal grid drive current is used to determine component values from the magnitude or phase or both of a corresponding sinusoidal grid voltage. The component values determined by DC or AC electrical grid drive currents can represent sensor types, authorized suppliers or manufacturers, emitter wavelengths among others. Further, a diode D (FIG. **43**C) can be used to provide one information element reading R_1 at one drive level or polarity and another information element reading, combining R_1 and R_2, at a second drive level or polarity, i.e. when the diode is forward biased.

Passive information element **4300** embodiments may include any of various combinations of resistors, capacitors or inductors connected in series and parallel, for example. Other information element **4300** embodiments connected to an electrical grid and read utilizing emitter array drivers incorporate other passive components, active components or memory components, alone or in combination, including transistor networks, PROMs, ROMs, EPROMs, EEPROMs, gate arrays and PLAs to name a few.

Sensor Cable

FIGS. **44**A-B illustrate a sensor cable **4400** having an outer jacket **4410**, an outer shield **4420**, multiple outer wires **4430**, an inner jacket **4440**, an inner shield **4450**, a conductive polymer **4460** and an inner twisted wire pair **4470**. The outer wires **4430** are advantageously configured to compactly carry multiple drive signals to the emitter array **700** (FIG. **7**). In one embodiment, there are twelve outer wires **4430** corresponding to four anode drive signals **4501** (FIG. **45**), four cathode drive signals **4502** (FIG. **45**), two thermistor pinouts **1450** (FIG. **15**) and two spares. The inner twisted wire pair **4470** corresponds to the sensor signal **2500** (FIG. **25**) and is extruded within the conductive polymer **4460** so as to reduce triboelectric noise. The shields **4420**, **4450** and the twisted pair **4470** boost EMI and crosstalk immunity for the sensor signal **2500** (FIG. **25**).

Controller

FIG. **45** illustrates a sensor controller **4500** located in the monitor **100** (FIG. **1**) and configured to provide anode drive signals **4501** and cathode drive signals **4502** to the emitter array **700** (FIG. **7**). The DSP (digital signal processor) **4040**, which performs signal processing functions for the monitor, also provides commands **4042** to the sensor controller **4500**. These commands determine drive signal **4501**, **4502** levels and timing. The sensor controller **4500** has a command register **4510**, an anode selector **4520**, anode drivers **4530**, current DACs (digital-to-analog converters) **4540**, a current multiplexer **4550**, cathode drivers **4560**, a current meter **4570** and a current limiter **4580**. The command register **4510** provides control signals responsive to the DSP commands **4042**. In one embodiment, the command register **4510** is a shift register that loads serial command data **4042** from the DSP **4040** and synchronously sets output bits that select or enable various functions within the sensor controller **4500**, as described below.

As shown in FIG. **45**, the anode selector **4520** is responsive to anode select **4516** inputs from the command register **4510** that determine which emitter array row **810** (FIG. **8**) is active. Accordingly, the anode selector **4520** sets one of the anode on **4522** outputs to the anode drivers **4530**, which pulls up to Vcc one of the anode outputs **4501** to the emitter array **700** (FIG. **8**).

Also shown in FIG. **45**, the current DACs **4540** are responsive to command register data **4519** that determines the currents through each emitter array column **820** (FIG. **8**). In one embodiment, there are four, 12-bit DACs associated with each emitter array column **820** (FIG. **8**), sixteen DACs in total. That is, there are four DAC outputs **4542** associated with each emitter array column **820** (FIG. **8**) corresponding to the currents associated with each row **810** (FIG. **8**) along that column **820** (FIG. **8**). In a particular embodiment, all sixteen DACs **4540** are organized as a single shift register, and the command register **4510** serially clocks DAC data **4519** into the DACs **4540**. A current multiplexer **4550** is responsive to cathode on **4518** inputs from the command register **4510** and anode on **4522** inputs from the anode selector **4520** so as to convert the appropriate DAC outputs **4542** to current set **4552** inputs to the cathode drivers **4560**. The cathode drivers **4560** are responsive to the current set **4552** inputs to pull down to ground one to four of the cathode outputs **4502** to the emitter array **700** (FIG. **8**).

The current meter **4570** outputs a current measure **4572** that indicates the total LED current driving the emitter array **700** (FIG. **8**). The current limiter **4580** is responsive to the current measure **4572** and limits specified by the command register **4510** so as to prevent excessive power dissipation by the emitter array **700** (FIG. **8**). The current limiter **4580** provides an enable **4582** output to the anode selector **4520**. A Hi Limit **4512** input specifies the higher of two preset current limits. The current limiter **4580** latches the enable **4582** output in an off condition when the current limit is

exceeded, disabling the anode selector **4520**. A trip reset **4514** input resets the enable **4582** output to re-enable the anode selector **4520**.

Sensor Assembly

As shown in FIG. **46**, the sensor **400** has an emitter shell **3800**, an emitter pad **3000**, a flex circuit assembly **2200**, a detector pad **3100** and a detector shell **3900**. A sensor cable **4400** attaches to the flex circuit assembly **2200**, which includes a flex circuit **2100**, an emitter assembly **500** and a detector assembly **2400**. The portion of the flex circuit assembly **2200** having the sensor cable **4400** attachment and emitter assembly **500** is housed by the emitter shell **3800** and emitter pad **3000**. The portion of the flex circuit assembly **2200** having the detector assembly **2400** is housed by the detector shell **3900** and detector pad **3100**. In particular, the detector assembly **2400** inserts into a shoe **3200**, and the shoe **3200** inserts into the detector pad **3100**. The emitter shell **3800** and detector shell **3900** are fastened by and rotate about hinge pins **410**, which insert through coils of a spring **3600**. The spring **3600** is held to the detector shell **3900** with a spring plate **3700**. A finger stop **450** attaches to the detector shell. In one embodiment, a silicon adhesive **420** is used to attach the pads **3000**, **3100** to the shells **3800**, **3900**, a silicon potting compound **430** is used to secure the emitter and detector assemblies **500**, **2400** within the pads **3000**, **3100**, and a cyanoacrylic adhesive **440** secures the sensor cable **4400** to the emitter shell **3800**.

A multiple wavelength sensor has been disclosed in detail in connection with various embodiments. These embodiments are disclosed by way of examples only and are not to limit the scope of the claims that follow. One of ordinary skill in art will appreciate many variations and modifications.

What is claimed is:

1. A physiological monitoring device comprising:

at least three LEDs recessed into a cavity, the at least three LEDs configured to emit light of at least three different wavelengths;

at least one detector configured to detect at least a portion of the light emitted from the at least three LEDs after at least a portion of the light has been attenuated by tissue, the at least one detector configured to output at least one signal responsive to the detected light;

a light block surrounding the at least one detector, the light block comprising a shoebox structure configured to recess the at least one detector into the shoebox structure, wherein the shoebox structure is at least partially formed of a black material, wherein a top of the shoebox structure includes only one opening through which light is configured to pass, the opening comprising an area smaller than a detection surface area of the at least one detector; and

a processor configured to receive and process one or more signals responsive to the outputted at least one signal and determine a physiological parameter of a user responsive to the one or more signals.

2. The device of claim **1**, wherein the at least three LEDs comprises at least eight LEDs.

3. The device of claim **2**, wherein the at least eight LEDs comprises at least two LEDs of the same wavelength.

4. The device of claim **1**, wherein the at least three LEDs comprises at least twelve LEDs.

5. The device of claim **1**, wherein at least two LEDs of the at least three LEDs are configured for concurrent activation.

6. The device of claim **1**, wherein the at least one detector comprises at least two detectors.

7. The device of claim **1**, wherein the at least one detector comprises at least two detectors of different types.

8. The device of claim **1**, wherein the opening provides an optical path from the tissue to the at least one detector.

9. The device of claim **1**, wherein the opening provides an optical path from the at least three LEDs to the tissue.

10. A physiological monitoring device comprising:

at least three LEDs recessed into a cavity, the at least three LEDs configured to emit light of at least three different wavelengths;

at least one detector configured to detect at least a portion of the light emitted from the at least three LEDs after at least a portion of the light has been attenuated by tissue, the at least one detector configured to output at least one signal responsive to the detected light;

an electromagnetic interference shield positioned between the at least three LEDs and the at least one detector;

a light block surrounding the at least one detector, the light block at least partially formed of black materials, the light block comprising a base, four side walls and a top forming an enclosure, wherein the light block comprises a window, the window having an area smaller than a detection surface area of the at least one detector; and

a processor configured to receive and process one or more signals responsive to the outputted at least one signal and determine a physiological parameter of a user responsive to the one or more signals.

11. The device of claim **10**, wherein the at least three LEDs comprises at least eight LEDs.

12. The device of claim **11**, wherein the at least eight LEDs comprises at least two LEDs of the same wavelength.

13. The device of claim **10**, wherein the at least three LEDs comprises at least twelve LEDs.

14. The device of claim **10**, wherein at least two LEDs of the at least three LEDs are configured for concurrent activation.

15. The device of claim **10**, wherein the at least one detector comprises at least two detectors.

16. The device of claim **10**, wherein the at least one detector comprises at least two detectors of different types.

17. The device of claim **10**, wherein the window provides an optical path from the tissue to the at least one detector.

18. The method of claim **10**, wherein the window provides an optical path from the at least three LEDs to the tissue.

19. A method for determining a physiological parameter of a living patient, the method comprising:

positioning a sensor with respect to body tissue of a living patient, the sensor comprising at least three LEDs, at least one detector, and a light block at least partially surrounding the at least one detector, wherein a top of the light block comprises only one opening through which light is configured to pass;

activating the at least three LEDs such that at least three wavelengths of light are emitted from the at least three LEDs;

detecting, at the at least one detector, at least a portion of the light emitted from the at least three LEDs after at least a portion of the light has been attenuated by the body tissue and passed through the opening of the top of the light block, wherein the at least one detector outputs at least one signal responsive to the detected light; and

determining a physiological parameter of the living patient responsive to the outputted at least one signal.

20. The method of claim **19**, wherein an area of the opening is smaller than a detection surface area of the at least one detector.

21. The method of claim **19**, wherein the light block is formed of black materials and further comprises a base, side walls, and a top forming an enclosure, and wherein the at least one detector is positioned in the enclosure.

22. The method of claim **19**, wherein said activating the at least three LEDs comprises concurrently activating at least two LEDs of the at least three LEDs.

23. The method of claim **19**, wherein the at least three LEDs comprises at least eight LEDs.

24. The method of claim **23**, wherein the at least eight LEDs comprises at least two LEDs of the same wavelength.

25. The method of claim **19**, wherein the at least three LEDs comprises at least twelve LEDs.

26. The method of claim **19**, wherein the at least one detector comprises at least two detectors.

27. The method of claim **19**, wherein the at least one detector comprises at least two detectors of different types.

28. The method of claim **19**, wherein the at least a portion of the light passes through the opening after it interacts with the body tissue.

29. The method of claim **19**, wherein the at least a portion of the light passes through the opening before it interacts with the body tissue.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 10,984,911 B2
APPLICATION NO. : 17/028655
DATED : April 20, 2021
INVENTOR(S) : Robert A. Smith

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

On page 2, in Column 1, item (63), Related U.S. Application Data, Line 5, delete "13/776,085," and insert -- 13/776,065, --.

On page 10, in Column 1, item (56), U.S. Patent Documents, Line 72, delete "Tani" and insert -- Tari --.

On page 13, in Column 2, item (56), Other Publications, Lines 62-63, delete "Jul. 17 2006;" and insert -- Jul. 17, 2006; --.

In the Specification

In Column 2, Line 12, delete "$I_{\theta,\lambda}$," and insert -- $I_{0,\lambda}$, --.

In Column 2, Line 23, delete "where," and insert -- where --.

In Column 4, Line 17, delete "FIG." and insert -- FIGS. --.

In Column 8, Line 13, delete "S_pO_2" and insert -- SpO_2 --.

In Column 10, Line 55, delete "Aa" and insert -- λa --.

In Column 15, Line 9, delete "(FIG." and insert -- (FIGS. --.

In Column 15, Line 48, delete "(FIG." and insert -- (FIGS. --.

In Column 15, Line 49, delete "(FIG." and insert -- (FIGS. --.

In Column 15, Line 50, delete "(FIG." and insert -- (FIGS. --.

Signed and Sealed this
Twenty-ninth Day of June, 2021

Drew Hirshfeld
Performing the Functions and Duties of the
Under Secretary of Commerce for Intellectual Property and
Director of the United States Patent and Trademark Office

In the Claims

In Column 20, Line 46, Claim 18, delete “The method of claim” and insert -- The device of claim --.